

# 1.138 Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBm6, FRBm4, 3+N-poles, Type AC and A

xEffect

SG02213



---

## Description

- High-quality residual current device / miniature circuit breaker combination, line voltage-independent
- Contact position indicator red - green
- Fault current tripping indicator white - blue
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Wide variety of rated tripping currents
- Rated currents up to 32 A
- Tripping characteristics B, C, D
- Rated breaking capacity 6 kA or 4.5 kA

$I_p/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
---------------------------	---------------------	-------------	----------------------

**Type A****6 kA, 3+N-poles****Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A**

SG02213

**Characteristic B**

13/0.03	FRBm6-B13/3N/003-A	170987	1/30
16/0.03	FRBm6-B16/3N/003-A	170988	1/30
13/0.1	FRBm6-B13/3N/01-A	170898	1/30
16/0.1	FRBm6-B16/3N/01-A	170899	1/30
13/0.3	FRBm6-B13/3N/03-A	170945	1/30
16/0.3	FRBm6-B16/3N/03-A	170946	1/30

SG02213

**Characteristic C**

6/0.03	FRBm6-C6/3N/003-A	170996	1/30
10/0.03	FRBm6-C10/3N/003-A	170997	1/30
13/0.03	FRBm6-C13/3N/003-A	170998	1/30
16/0.03	FRBm6-C16/3N/003-A	170999	1/30
6/0.1	FRBm6-C6/3N/01-A	170926	1/30
10/0.1	FRBm6-C10/3N/01-A	170927	1/30
13/0.1	FRBm6-C13/3N/01-A	170928	1/30
16/0.1	FRBm6-C16/3N/01-A	170929	1/30
6/0.3	FRBm6-C6/3N/03-A	170954	1/30
10/0.3	FRBm6-C10/3N/03-A	170955	1/30
13/0.3	FRBm6-C13/3N/03-A	170956	1/30
16/0.3	FRBm6-C16/3N/03-A	170957	1/30

SG02213

**Characteristic D**

6/0.03	FRBm6-D6/3N/003-A	171008	1/30
10/0.03	FRBm6-D10/3N/003-A	170892	1/30
13/0.03	FRBm6-D13/3N/003-A	170893	1/30
16/0.03	FRBm6-D16/3N/003-A	170894	1/30
6/0.1	FRBm6-D6/3N/01-A	170938	1/30
10/0.1	FRBm6-D10/3N/01-A	170939	1/30
13/0.1	FRBm6-D13/3N/01-A	170940	1/30
16/0.1	FRBm6-D16/3N/01-A	170941	1/30
6/0.3	FRBm6-D6/3N/03-A	170966	1/30
10/0.3	FRBm6-D10/3N/03-A	170967	1/30
13/0.3	FRBm6-D13/3N/03-A	170968	1/30
16/0.3	FRBm6-D16/3N/03-A	170969	1/30

$I_p/I_{\Delta n}$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type AC****6 kA, 3+N-poles****Conditionally surge current-proof 250 A, Type AC** 

SG02213

**Characteristic B**

13/0.03	FRBm6-B13/3N/003	170985	1/30
16/0.03	FRBm6-B16/3N/003	170986	1/30
13/0.1	FRBm6-B13/3N/01	170896	1/30
16/0.1	FRBm6-B16/3N/01	170897	1/30
13/0.3	FRBm6-B13/3N/03	170943	1/30
16/0.3	FRBm6-B16/3N/03	170944	1/30

SG02213

**Characteristic C**

6/0.03	FRBm6-C6/3N/003	170989	1/30
10/0.03	FRBm6-C10/3N/003	170990	1/30
13/0.03	FRBm6-C13/3N/003	170991	1/30
16/0.03	FRBm6-C16/3N/003	170992	1/30
6/0.1	FRBm6-C6/3N/01	170900	1/30
10/0.1	FRBm6-C10/3N/01	170901	1/30
13/0.1	FRBm6-C13/3N/01	170902	1/30
16/0.1	FRBm6-C16/3N/01	170903	1/30
6/0.3	FRBm6-C6/3N/03	170947	1/30
10/0.3	FRBm6-C10/3N/03	170948	1/30
13/0.3	FRBm6-C13/3N/03	170949	1/30
16/0.3	FRBm6-C16/3N/03	170950	1/30

SG02213

**Characteristic D**

6/0.03	FRBm6-D6/3N/003	171003	1/30
10/0.03	FRBm6-D10/3N/003	171004	1/30
13/0.03	FRBm6-D13/3N/003	171005	1/30
16/0.03	FRBm6-D16/3N/003	171006	1/30
6/0.1	FRBm6-D6/3N/01	170933	1/30
10/0.1	FRBm6-D10/3N/01	170934	1/30
13/0.1	FRBm6-D13/3N/01	170935	1/30
16/0.1	FRBm6-D16/3N/01	170936	1/30
6/0.3	FRBm6-D6/3N/03	170961	1/30
10/0.3	FRBm6-D10/3N/03	170962	1/30
13/0.3	FRBm6-D13/3N/03	170963	1/30
16/0.3	FRBm6-D16/3N/03	170964	1/30

**Specifications | Combined RCD/MCB Devices FRBm6, FRBm4, 3+N-poles****Description**

- Combined RCD/MCB device
- Line voltage-independent tripping
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Guide for secure terminal connection
- Contact position indicator red - green
- Fault current tripping indicator white - blue
- Comprehensive range of accessories suitable for subsequent installation
- The test key "T" must be pressed every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven.  
Under special conditions (e.g. damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltages due to switching of equipment and/or atmospheric discharges, portable equipment ...), it's recommended to test in monthly intervals.
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement ( $R_E$ ), or proper checking of the earth conductor condition redundant, which must be performed separately.

**Accessories:**

Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal switch for subsequent installation	ZP-NHK	248437
Shunt trip release	ZP-ASA/..	248438, 248439
Terminal cover 4-poles	Z-TC/SD-4P	178101

**Technical Data****FRBm6, FRBm4, 3+N-poles****Electrical**


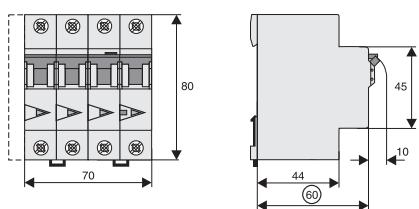
Design according to	IEC/EN 61009
Current test marks as printed onto the device	
Tripping line voltage-independent	instantaneous 250A (8/20μs), surge current-proof, N protected
Rated voltage	$U_n$ 240/415V AC, 50Hz
Rated tripping current	$I_{\Delta n}$ 30, 100, 300 mA
Rated non-tripping current	$I_{\Delta n0}$ 0.5 $I_{\Delta n}$
Sensitivity	AC and pulsating DC
Selectivity class	3
Rated short circuit capacity	$I_{cn}$
FRBm6	6 kA
FRBm4	4.5 kA
Rated current	6 - 32 A
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50μs)
Characteristic	B, C, D
Maximum back-up fuse (short circuit protection)	100 A gL (>10 kA)
Endurance	
electrical components	≥ 4,000 operating cycles
mechanical components	≥ 10,000 operating cycles

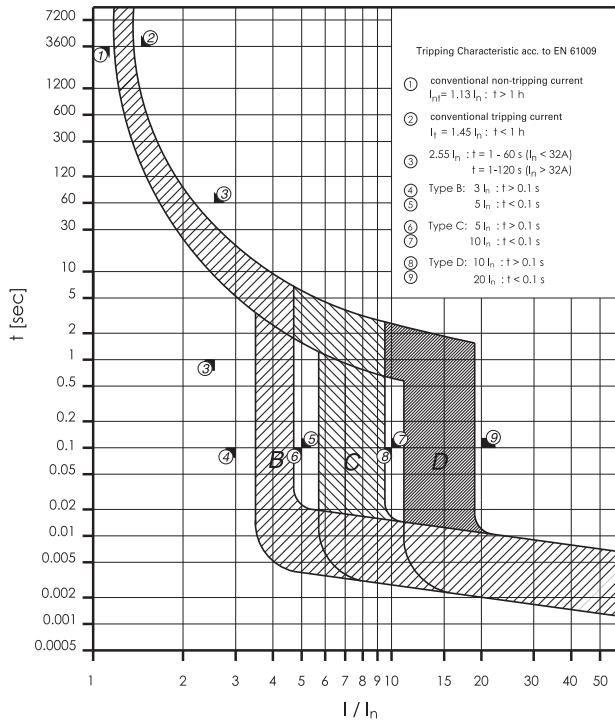
**Mechanical**

Frame size	45 mm
Device height	80 mm
Device width	70 mm (4MU)
Mounting	3-position DIN rail clip, permits removal from existing busbar system
Degree of protection switch	IP20
Degree of protection, built-in	IP40
Upper and lower terminals	open mouthed/lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1 - 25 mm <sup>2</sup>
Terminal torque	2 - 2.4 Nm
Busbar thickness	0.8 - 2 mm
Operation temperature	-25°C to +40°C
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC 68-2 (25..55°C / 90..95% RH)

**Connection diagram**

3+N-poles

**Dimensions (mm)**

**Tripping Characteristic FRBm. 3+N-poles, Characteristics B, C and D****Internal Resistance FRBm. 3+N-poles**

Type B			Type C			Type D		
At room temperature (single pole)								
$I_n$ [A]	L1, L2 R* [mΩ]	L3 R* [mΩ]	N R* [mΩ]	L1, L2 R* [mΩ]	L3 R* [mΩ]	N R* [mΩ]	L1, L2 R* [mΩ]	L3 R* [mΩ]
6	-	-	-	34,3	28,2	28,8	34,3	28,0
10	-	-	-	19,3	15,3	18,1	19,7	15,3
13	11,8	12,6	12,2	11,9	12,7	9,1	9,9	10,4
16	9,8	9,3	7,8	9,5	8,8	6,6	9,8	9,2
20	-	-	-	6,5	5,9	5,5	6,6	6,1
25	-	-	-	4,3	3,7	3,5	-	-

\* 50Hz

**Power Loss at  $I_n$  FRBm. 3+N-poles**

	Type B	Type C	Type D
(entire unit)			
$I_n$ [A]	P* [W]	P* [W]	P* [W]
6	-	4,8	4,8
10	-	8,2	7,8
13	10,2	9,4	7,7
16	11,6	10,9	11,2
20	-	11,8	12,0
25	-	11,6	-

\* 50Hz and ambient temperature

**Back-up Protection FRBm4/FRBm6**

The up-stream protective devices will protect the down-stream FRBm4/FRBm6 up to the short-circuit current specified.

**FRBm and NZM1**

Short circuit currents in kA.

<b>FRBm4/</b>	<b>NZMB1(C1)(N1)(H1)-A...</b>		
<b>FRBm6</b>	$U_e = 415 \text{ V}$		
	<b>Type B</b>	<b>Type C</b>	<b>Type D</b>
<b>6</b>	-	20	20
<b>10</b>	-	20	20
<b>13</b>	20	20	20
<b>16</b>	20	20	20
<b>20</b>	-	20	20
<b>25</b>	-	20	-

$U_e = 415 \text{ V}$ :  $I_{cn}$  (FRBm4) = 4.5 kA (acc. to IEC/EN 61009)

$U_e = 415 \text{ V}$ :  $I_{cu}$  (FRBm6) = 6 kA (acc. to IEC/EN 61009)

$U_e = 400/415 \text{ V}$ :  $I_{cn}$  (NZMB1) = 25 kA (acc. to IEC/EN 60947-2)

$U_e = 400/415 \text{ V}$ :  $I_{cn}$  (NZMC1) = 36 kA (acc. to IEC/EN 60947-2)

$U_e = 400/415 \text{ V}$ :  $I_{cn}$  (NZMN1) = 50 kA (acc. to IEC/EN 60947-2)

$U_e = 400/415 \text{ V}$ :  $I_{cn}$  (NZMH1) = 100 kA (acc. to IEC/EN 60947-2)

**FRBm and NZM2**

Short circuit currents in kA.

<b>FRBm4/</b>	<b>NZMB2(C2)(N2)(H2)-A...</b>		
<b>FRBm6</b>	$U_e = 415 \text{ V}$		
	<b>Type B</b>	<b>Type C</b>	<b>Type D</b>
<b>6</b>	-	20	20
<b>10</b>	-	20	20
<b>13</b>	20	20	20
<b>16</b>	20	20	20
<b>20</b>	-	20	20
<b>25</b>	-	20	-

$U_e = 415 \text{ V}$ :  $I_{cn}$  (FRBm4) = 4.5 kA (acc. to IEC/EN 61009)

$U_e = 415 \text{ V}$ :  $I_{cu}$  (FRBm6) = 6 kA (acc. to IEC/EN 61009)

$U_e = 400/415 \text{ V}$ :  $I_{cn}$  (NZMB2) = 25 kA (acc. to IEC/EN 60947-2)

$U_e = 400/415 \text{ V}$ :  $I_{cn}$  (NZMC2) = 36 kA (acc. to IEC/EN 60947-2)

$U_e = 400/415 \text{ V}$ :  $I_{cn}$  (NZMN2) = 50 kA (acc. to IEC/EN 60947-2)

$U_e = 400/415 \text{ V}$ :  $I_{cn}$  (NZMH2) = 150 kA (acc. to IEC/EN 60947-2)