

# Instructions for installation, operation, and maintenance of type VCP-W vacuum circuit breakers



**Breaker types 50VCP-W, 75VCP-W, and 150VCP-W are located in IB131006EN. This IB includes the enhanced pole unit versions of these breakers and are listed as types 5VCP-W, 8VCP-W, and 15VCP-W in Tables 1 and 2.**



*Powering Business Worldwide*

---

**⚠ WARNING**

---

**IMPROPERLY INSTALLING OR MAINTAINING THESE PRODUCTS CAN RESULT IN DEATH, SERIOUS PERSONAL INJURY, OR PROPERTY DAMAGE.**

**READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE ATTEMPTING ANY UNPACKING, ASSEMBLY, OPERATION OR MAINTENANCE OF THE CIRCUIT BREAKERS.**

**INSTALLATION OR MAINTENANCE SHOULD BE ATTEMPTED ONLY BY QUALIFIED PERSONNEL. THIS INSTRUCTION BOOK SHOULD NOT BE CONSIDERED ALL INCLUSIVE REGARDING INSTALLATION OR MAINTENANCE PROCEDURES. IF FURTHER INFORMATION IS REQUIRED, YOU SHOULD CONTACT EATON.**

---

---

**⚠ WARNING**

---

**THE CIRCUIT BREAKER ELEMENTS DESCRIBED IN THIS BOOK ARE DESIGNED AND TESTED TO OPERATE WITHIN THEIR NAMEPLATE RATINGS. OPERATION OUTSIDE OF THESE RATINGS MAY CAUSE THE EQUIPMENT TO FAIL, RESULTING IN DEATH, SERIOUS PERSONAL INJURY, AND PROPERTY DAMAGE.**

**ALL SAFETY CODES, SAFETY STANDARDS, AND/OR REGULATIONS AS THEY MAY BE APPLIED TO THIS TYPE OF EQUIPMENT MUST BE STRICTLY ADHERED TO.**

**THESE CIRCUIT BREAKER ELEMENTS ARE DESIGNED TO BE INSTALLED PURSUANT TO THE AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI). SERIOUS INJURY, INCLUDING DEATH, CAN RESULT FROM FAILURE TO FOLLOW THE PROCEDURES OUTLINED IN THIS MANUAL. THESE CIRCUIT BREAKER ELEMENTS ARE SOLD PURSUANT TO A NON-STANDARD PURCHASING AGREEMENT WHICH LIMITS THE LIABILITY OF THE MANUFACTURER.**

---

**These instructions do not purport to cover all possible contingencies, details, and variations which may arise during installation, operation or maintenance. If further information is desired by purchaser regarding his particular installation, operation or maintenance of particular equipment, contact an Eaton representative.**

## Contents

Description	Page
1. Introduction	7
1.1 Preliminary comments and safety pre-cautions	7
1.1.1 Warranty and liability information	7
1.1.2 Safety precautions	7
1.2 General information	7
1.3 Type VCP-W vacuum circuit breaker ratings	8
1.4 Outlines and dimensions	18
2. Safe practices	21
2.1 Recommendations	22
3. Receiving, handling, and storage	21
3.1 General	21
3.2 Receiving	21
3.3 Handling	21
3.4 Storage	21
3.5 Switchgear foundation criteria	22
3.6 Shipping breakers in switchgear	22
3.7 Tools and accessories	23
3.8 Type VCP-W vacuum circuit breaker element weights (Tables 25, 26, and 27)	31
4. Initial inspection and installation	39
4.1 Introduction	39
4.2 Manual operation check	39
4.3 Vacuum interrupter integrity	39
4.4 Insulation	39
4.5 Contact erosion and wipe	39
4.6 Primary circuit resistance	39
4.7 Nameplate	39
4.8 Electrical operation check	39
4.8.1 Circuit breaker insertion and removal	39
4.8.2 Circuit breaker performance check	44
4.9 Circuit breaker/structure interfacing	45
4.9.1 Interface interlocks/interfacing check	45
5. Description and operation	47
5.1 Introduction	47
5.2 Interrupter assembly	47
5.2.1 Vacuum interrupter	48
5.2.2 Contact erosion indication	48
5.2.3 Loading spring indicator	48
5.2.4 Contact wipe and stroke	48
5.2.5 Phase barriers	48
5.3 Stored energy mechanism	50
5.3.1 Operation of stored energy mechanism	50
5.3.2 Charging	53
5.3.3 Closing operation	53
5.3.4 Tripping operation	53
5.3.5 Trip free operation	53
5.4 Control schemes	53
5.4.1 Timing	57
5.4.2 Secondary disconnects	57
5.4.3 Shunt trip device	57
5.4.4 Under-voltage trip device	57
5.5 Interlocks and interfacing	59
5.6 Levering mechanism	59
5.7 Operations counter	59

5.8 Ground contact . . . . .	59
5.9 MOC and TOC switch operations . . . . .	59
6. Inspection, maintenance, and troubleshooting . . . . .	60
6.1 Introduction . . . . .	60
6.2 Frequency of inspection and maintenance . . . . .	60
6.2.1 Qualified personnel . . . . .	60
6.2.2 General torque guidelines . . . . .	61
6.3 Inspection and maintenance procedures . . . . .	62
6.4 Vacuum interrupter integrity test . . . . .	63
6.5 Contact erosion and wipe . . . . .	63
6.6 Insulation . . . . .	66
6.7 Insulation integrity check . . . . .	66
6.8 Primary circuit resistance check . . . . .	66
6.9 Mechanism check . . . . .	66
6.9.1 CloSure™ test . . . . .	66
6.10 Megger and power factor testing . . . . .	66
6.11 Mechanism lubrication . . . . .	70
6.12 Finger clusters and switchgear stab lubrication . . . . .	70
6.13 Main contacts to switchgear primary engagement . . . . .	70
6.14 How to determine the manufacturing date . . . . .	70
6.15 Troubleshooting chart . . . . .	71
6.16 End of life procedures . . . . .	71
6.17 Failure reporting . . . . .	71
7. Renewal parts . . . . .	72
7.1 General . . . . .	72
7.1.1 Ordering instructions . . . . .	72
8. Optional accessories . . . . .	92
8.1 Optional factory installed roll-on-floor wheel kit . . . . .	92
8.2 Optional automatic/manual hybrid secondary for BPI pan assembly . . . . .	92
8.3 Optional 3,000 A ball screw drive for BPI pan assembly . . . . .	94

**List of figures**

<b>Figure Title</b>	<b>Page</b>
Figure 1. Type VCP-W (K = 1 & MVA) and VCPW-SE circuit breaker outlines and dimensions in inches (mm), enhanced pole unit shown. . . . .	18
Figure 2. Type 27 kV VCP-W, VCP-WC, and IEC circuit breaker outlines and dimensions in inches (mm). 19	
Figure 3. Type VCPW-ND circuit breaker outlines and dimensions in inches (mm). . . . .	20
Figure 4. Typical VCP-W tools and accessories. . . . .	33
Figure 5. Typical front view VCP-W vacuum circuit breaker. . . . .	34
Figure 6. Typical VCP-W vacuum circuit breaker with front cover removed. . . . .	35
Figure 7. Typical rear view VCP-W 27 kV C-rated, IEC, and VCP-WXC. . . . .	36
Figure 8. Typical rear view VCP-W, 5/15 kV, k=1, MVA enhanced pole unit shown. . . . .	37
Figure 9. Typical VCP-W vacuum circuit breaker front cover arrangement. . . . .	38
Figure 10. Type VCP-W circuit breaker manual charging handle in use. . . . .	39
Figure 11. Insertion of the drawout extension rails. . . . .	40
Figure 12. Lifting and setting the breaker in the housing. . . . .	40
Figure 13. BPI pan assembly. . . . .	42
Figure 14. Non-BPI pan assembly. . . . .	43
Figure 15. Engaging extension rails in a lower circuit breaker compartment. . . . .	45
Figure 16. Typical VCP-W circuit breaker bottom view. . . . .	45
Figure 17. Pulling secondary disconnect cage to engage secondaries in TEST position (old version shown). New version will have BPI pan with automatic secondaries. . . . .	46
Figure 18. Engaging levering-in crank. . . . .	46
Figure 19. Typical VCP-W rear view showing vacuum interrupters and current carrying system. . . . .	47
Figure 20. Graphic representation of arc interruption. . . . .	48
Figure 21. Closing cam and trip linkage. . . . .	51

Figure 22. Charging schematic. . . . . 52

Figure 23. Typical VCP-W DC and AC control schemes. . . . . 54

Figure 24. 15 kV VCP-WXC 63 kA 1200-3000 A special power plant breakers, styles:  
4A35390G10, 4A35391G10, 4A35392G10 - DC control scheme and diagram. . . . . 55

Figure 25 3 - 5 kV VCP-WXC 63 kA 1200-3000 A special power plant breakers, styles:  
4A35390G10, 4A35391G10, 4A35392G10 - DC control scheme and diagram . . . . . 56

Figure 25. 15 kV under-voltage trip device configuration. . . . . 58

Figure 26. Lubrication points. . . . . 61

Figure 27. 50 VCP-W 63 - 63 kA pole unit. . . . . 61

Figure 28. Vacuum interrupter showing contact erosion indicator with breaker open. . . . . 64

Figure 29. Vacuum interrupter showing contact erosion indicator with breaker closed. . . . . 64

Figure 30. Wipe indication procedure (performed only with the breaker closed). . . . . 65

Figure 31. Starting tape at the bottom of the cam. . . . . 67

Figure 32. Wrapping tape up around the cam. . . . . 67

Figure 33. Attaching tape around to the back of the cam. . . . . 67

Figure 34. Attaching CloSure test tool at hole "A". . . . . 67

Figure 35. Attaching CloSure test tool at "B". . . . . 67

Figure 36. Manually charging the closing springs. . . . . 68

Figure 37. Manually closing the circuit breaker with the marker in hole "C". . . . . 68

Figure 38. Top view of the cam and marker interface. . . . . 68

Figure 39. Move marker 15° to the right. . . . . 68

Figure 40. Move marker 15° to the left. . . . . 68

Figure 41. Remove marked masking tape from the cam. . . . . 69

Figure 42. Place the tape on the right side panel of the breaker. . . . . 69

Figure 43. Illustrative testing tape sample. . . . . 69

Figure 44. Front view of closure tool showing mounting/testing locations (6352C49H01). . . . . 69

Figure 45. Typical circuit breaker front view with CloSure tool attached. . . . . 69

Figure 46. Roll-on-floor wheel kit. . . . . 92

Figure 47. Optional automatic/manual secondary for BPI pan assembly. . . . . 93

**List of tables**

<b>Table Title</b>	<b>Page</b>
Table 1. 5/15 kV VCP-W (k=1) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards. . . . .	8
Table 2. 5/15 kV VCP-W (k=1) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards. . . . .	9
Table 3. 27 kV VCP-W (k=1) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards . . . . .	10
Table 4. 27 kV VCP-WR (k=1) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards. . . . .	12
Table 5. 5-27 kV VCP-WC (k=1) extra capability vacuum circuit breaker 5-27 kV rated symmetrical current basis, per ANSI standards. . . . .	14
Table 6. 5/15 kV VCP-W (MVA) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards. . . . .	15
Table 7. 5/15 kV VCP-W (MVA) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards. . . . .	16
Table 8. 15 kV VCP-WXC (k=1) circuit breaker through 15 kV rated symmetrical current basis, per ANSI standards. . . . .	16
Table 9. 5/15 kV VCP-WND (MVA) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards. . . . .	17
Table 10. 5/15 kV VCP-WND (MVA) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards (continued). . . . .	17
Table 11. (IEC-56 Standards) 17.5 kV VCP-W vacuum circuit breaker rated on symmetrical current basis. . . . .	18
Table 12. Accessories for 36-inch wide breaker compartments for 29-inch frame breaker. . . . .	24
Table 13. Narrow design accessories for 26-inch-wide breaker compartments. . . . .	25
Table 14. 27 kV VCP-W accessories. . . . .	26
Table 15. 15 kV simple manual ground and test devices—bus bar type. . . . .	27
Table 16. 15 kV VCP-W simple manual ground and test device—"bail" and "ball" type. . . . .	27

Table 17. 15 kV complex manual (selectable) ground and test device.....	27
Table 18. 15 kV simple electrically operated ground and test device. ....	28
Table 19. 15 kV simple electrically operated ground and test device for VCP-W without key interlocks. ....	29
Table 20. 15 kV simple electrically operated ground and test device for VCP-WXC. ....	29
Table 21. 15 kV VCP-W CEG&TD 1200/2000/3000 A - product code: 6078R. ....	29
Table 22. 15 kV VCP-W CEG&TD accessories.....	30
Table 23. 27 kV manual ground and test device. ....	30
Table 24. Dummy elements.....	31
Table 25. K=1 rated VCP-W breaker weights.....	31
Table 26. MVA Rated VCP-W breaker weights. ....	32
Table 27. VCP-W IEC rated breaker weights.....	32
Table 28. VCP-W & VCP-WC circuit breaker barrier configurations. ....	49
Table 29. Circuit breaker timing (made while the circuit breaker is levered to the CONNECTED position). ....	57
Table 30. Torque guidelines. ....	61
Table 31. Test voltage (insulation and vacuum integrity). ....	63
Table 32. Typical resistance measurements. ....	66
Table 33. Closure tool mounting/testing locations by circuit breaker type. ....	70
Table 34. Recommended replacement parts for ANSI type VCP-W k=1 rated breakers.....	72
Table 35. Recommended replacement parts for ANSI type VCP-W MVA rated breakers. ....	76
Table 36. Recommended replacement parts for ANSI type VCP-W 27 kV rated breakers. ....	80
Table 37. Recommended replacement parts for ANSI type VCP-WC (Extra Capability) breakers 5-27 kV.....	82
Table 38. Recommended replacement parts for IEC type VCP-W rated breakers.....	85
Table 39. Recommended replacement parts for type VCP-W breakers.....	88

## 1. Introduction

### 1.1 Preliminary comments and safety pre-cautions

This technical document is intended to cover most aspects associated with the installation, operation, and maintenance of Type VCP-W, VCPW-SE, VCP-WC, and VCPW-ND vacuum circuit breakers. Legacy VCP-W breakers are contained in IB131006EN and will be used for 50 Hz applications. It is provided as a guide for authorized and qualified personnel only. Please refer to the specific WARNING and CAUTION in Paragraph 1.1.2 before proceeding past Section 1. If further information is required by the purchaser regarding a particular installation, application, or maintenance activity, an Eaton representative should be contacted.

#### Legend of change

Legacy pole unit breakers	Enhanced pole unit breakers
50 VCP-W	5 VCP-W
75 VCP-W	8 VCP-W
150 VCP-W	15 VCP-W

**Note:** IEC and ND breakers - No change.

#### 1.1.1 Warranty and liability information

**NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OF MERCHANTABILITY, OR WARRANTIES ARISING FROM COURSE OF DEALING OR USAGE OF TRADE, ARE MADE REGARDING THE INFORMATION, RECOMMENDATIONS AND DESCRIPTIONS CONTAINED HEREIN.** In no event will Eaton be responsible to the purchaser or user in contract, in tort (including negligence), strict liability or otherwise for any special, indirect, incidental, or consequential damage or loss whatsoever, including but not limited to damage or loss of use of equipment, plant or power system, cost of capital, loss of power, additional expenses in the use of existing power facilities, or claims against the purchaser or user by its customers resulting from the use of the information and descriptions contained herein.

#### 1.1.2 Safety precautions

All safety codes, safety standards, and/or regulations must be strictly observed in the installation, operation, and maintenance of this device.

---

### **⚠ WARNING**

**THE WARNINGS AND CAUTIONS INCLUDED AS PART OF THE PROCEDURAL STEPS IN THIS DOCUMENT ARE FOR PERSONNEL SAFETY AND PROTECTION OF EQUIPMENT FROM DAMAGE. AN EXAMPLE OF A TYPICAL WARNING LABEL HEADING IS SHOWN ABOVE TO FAMILIARIZE PERSONNEL WITH THE STYLE OF PRESENTATION. THIS WILL HELP TO INSURE THAT PERSONNEL ARE ALERT TO WARNINGS, WHICH MAY APPEAR THROUGHOUT THE DOCUMENT. IN ADDITION, CAUTIONS ARE ALL UPPER CASE AND BOLDFACE AS SHOWN BELOW.**

---

---

### **⚠ CAUTION**

**COMPLETELY READ AND UNDERSTAND THE MATERIAL PRESENTED IN THIS DOCUMENT BEFORE ATTEMPTING INSTALLATION, OPERATION, OR APPLICATION OF THE EQUIPMENT. IN ADDITION, ONLY QUALIFIED PERSONS SHOULD BE PERMITTED TO PERFORM ANY WORK ASSOCIATED WITH THE EQUIPMENT. ANY WIRING INSTRUCTIONS PRESENTED IN THIS DOCUMENT MUST BE FOLLOWED PRECISELY. FAILURE TO DO SO COULD CAUSE PERMANENT EQUIPMENT DAMAGE.**

---

### 1.2 General information

The purpose of this book is to provide instructions for unpacking, storage, use, operation, and maintenance of Type VCP-W, VCPW-SE, VCP-WC, and VCPW-ND vacuum circuit breakers. These circuit breakers are horizontal drawout type removable interrupting elements designed for use in VacClad-W Metal-Clad switchgear and appropriate VCP-W modules. They provide reliable control and protection for medium voltage electrical equipment and circuits. All VCP-W circuit breaker elements are designed to ANSI Standards for reliable performance, ease of handling, and simplified maintenance. In addition, some VCP-W circuit breakers have been tested in accordance with IEC Standards for applications around the world.

The VCPW-SE circuit breaker element is a VCP-W circuit breaker designed specifically for special environment applications and operating conditions through 27 kV. The VCPW-ND circuit breaker element is a narrow design VCP-W circuit breaker designed specifically for use in 5 kV applications where floor space requirements would not allow the industry standard 36 in. (914.4 mm) wide switchgear. From this point on, all circuit breaker elements will be referred to as Type VCP-W unless the reference is specific to a particular design. The VCP-WC circuit breaker element is a VCP-W circuit breaker designed and tested for extra capabilities beyond one or more of the preferred ratings of the applicable ANSI Standard.

---

### **⚠ WARNING**

**SATISFACTORY PERFORMANCE OF THESE BREAKERS IS CONTINGENT UPON PROPER APPLICATION, CORRECT INSTALLATION, AND ADEQUATE MAINTENANCE. THIS INSTRUCTION BOOK MUST BE CAREFULLY READ AND FOLLOWED IN ORDER TO OBTAIN OPTIMUM PERFORMANCE FOR LONG USEFUL LIFE OF THE CIRCUIT BREAKER ELEMENTS.**

---

---

### **⚠ WARNING**

**THE CIRCUIT BREAKERS DESCRIBED IN THIS BOOK ARE DESIGNED AND TESTED TO OPERATE WITHIN THEIR NAMEPLATE RATINGS. OPERATION OUTSIDE OF THESE RATINGS MAY CAUSE THE EQUIPMENT TO FAIL, RESULTING IN DEATH, BODILY INJURY, AND PROPERTY DAMAGE.**

---

1.3 Type VCP-W vacuum circuit breaker ratings

Table 1. 5/15 kV VCP-W (k=1) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards.

Identification	Rated values ①②			Insulation level			Short-circuit ratings (reference C37.04-2018 and C37.09-2018 except where noted)							
	Maximum voltage (V)	Nominal three-phase MVA class	Rated voltage range factor	Power frequency withstand voltage (1 min.)	Lightning impulse withstand voltage (1.2 x 50 μs)	Rated continuous current at 60 Hz	Symmetrical interrupting current (I)	%dc component	Asymmetrical interrupting current (It)	Closing and latching current	Short-time withstand current	Interrupting time	Interrupting time (cycles at 60 Hz)	No-load (mechanical endurance)
Units	kV rms		K	kV rms	kV peak	A rms ①③	kA rms sym	% (4)	kA rms asym. total④	kA peak ⑤	kA rms ⑥	ms	Cycles ⑦	⑧
5VCP-W25	4.76	N/A	1	19	60	1200	25	43	29	65	25	83/50	5/3	10,000
	4.76	N/A	1	19	60	2000	25	43	29	65	25	83/50	5/3	10,000
	4.76	N/A	1	19	60	3000	25	43	29	65	25	83/50	5/3	10,000
5VCP-W32	4.76	N/A	1	19	60	1200	31.5	43	37	82	31.5	83/50	5/3	10,000
	4.76	N/A	1	19	60	2000	31.5	43	37	82	31.5	83/50	5/3	10,000
	4.76	N/A	1	19	60	3000	31.5	43	37	82	31.5	83/50	5/3	10,000
5VCP-W40	4.76	N/A	1	19	60	1200	40	43	47	104	40	83/50	5/3	10,000
	4.76	N/A	1	19	60	2000	40	43	47	104	40	83/50	5/3	10,000
	4.76	N/A	1	19	60	3000	40	43	47	104	40	83/50	5/3	10,000
5VCP-W50	4.76	N/A	1	19	60	1200	50	43	58.5	130	50	83/50	5/3	10,000
	4.76	N/A	1	19	60	2000	50	43	58.5	130	50	83/50	5/3	10,000
	4.76	N/A	1	19	60	3000	50	43	58.5	130	50	83/50	5/3	10,000
50VCP-W63 ⑨	4.76	N/A	1	19	60	1200	63	55	80	164	63	83/50	5/3	10,000
	4.76	N/A	1	19	60	2000	63	55	80	164	63	83/50	5/3	10,000
	4.76	N/A	1	19	60	3000	63	55	80	164	63	83/50	5/3	10,000
8VCP-W40	8.25	N/A	1	36	95	1200	40	43	47	104	40	83/50	5/3	10,000
	8.25	N/A	1	36	95	2000	40	43	47	104	40	83/50	5/3	10,000
	8.25	N/A	1	36	95	3000	40	43	47	104	40	83/50	5/3	10,000
8VCP-W50	8.25	N/A	1	36	95	1200	50	43	58.5	130	50	83/50	5/3	10,000
	8.25	N/A	1	36	95	2000	50	43	58.5	130	50	83/50	5/3	10,000
	8.25	N/A	1	36	95	3000	50	43	58.5	130	50	83/50	5/3	10,000
15VCP-W25	15	N/A	1	36	95	1200	25	43	29	65	25	83/50	5/3	10,000
	15	N/A	1	36	95	2000	25	43	29	65	25	83/50	5/3	10,000
	15	N/A	1	36	95	3000	25	43	29	65	25	83/50	5/3	10,000
15VCP-W32	15	N/A	1	36	95	1200	31.5	43	37	82	31.5	83/50	5/3	10,000
	15	N/A	1	36	95	2000	31.5	43	37	82	31.5	83/50	5/3	10,000
	15	N/A	1	36	95	3000	31.5	43	37	82	31.5	83/50	5/3	10,000
15VCP-W40	15	N/A	1	36	95	1200	40	43	47	104	40	83/50	5/3	10,000
	15	N/A	1	36	95	2000	40	43	47	104	40	83/50	5/3	10,000
	15	N/A	1	36	95	3000	40	43	47	104	40	83/50	5/3	10,000
15VCP-W50	15	N/A	1	36	95	1200	50	43	58.5	130	50	83/50	5/3	10,000
	15	N/A	1	36	95	2000	50	43	58.5	130	50	83/50	5/3	10,000
	15	N/A	1	36	95	3000	50	43	58.5	130	50	83/50	5/3	10,000
150VCP-W63 ⑨	15	N/A	1	36	95	1200	63	55	80	164	63	83/50	5/3	10,000
	15	N/A	1	36	95	2000	63	55	80	164	63	83/50	5/3	10,000
	15	N/A	1	36	95	3000	63	55	80	164	63	83/50	5/3	10,000

① All circuit breakers are tested at 60 Hz and can not be applied at 50 Hz per C37.09-2018. If 50 Hz is required, use VCP-W Legacy breaker offering. Contact Eaton for required ratings.  
 ② All breakers listed in this chart are UL Listed.  
 ③ 3000 A rated breakers can be fan-cooled for use in 4000 A rated switchgear.  
 ④ All breakers tested to C37.09-2018 meet the requirements for the last pole to clear during asymmetrical T100a tests defined by Table 2, and can safely be applied at the rated asymmetrical interrupting current and % dc offset as calculated by the equations within C37.09-2018 and C37.04-2018. Ratings are based on a dc time constant of 45 ms (corresponding to X/R of 17 for 60 Hz) and determined using the circuit breaker minimum opening time plus the assumed minimum relay time of ½ cycle (8.33 ms for 60 Hz).  
 ⑤ These breakers were tested to (2.6 \* I) for Close and Latch.  
 ⑥ Duration of short-time current and maximum permissible tripping delay are both two seconds for all circuit breakers listed in this table, as required in C37.04-2018 and C37.09-2018.  
 ⑦ All circuit breakers are available as 3 or 5 cycle breakers.  
 ⑧ Each operation consists of one closing plus one opening.  
 ⑨ These circuit breakers do not come with the upgraded pole units and were tested to earlier versions of the IEEE standards and can be applied at 50 Hz with no derating.



**Table 2. 5/15 kV VCP-W (k=1) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards.①**

Identification	Rated values ②																
	Drawout circuit breaker type	Continuous current	Operating duty	TRV peak voltage (E <sub>2</sub> ) = (U <sub>c</sub> )	TRV time to peak (T <sub>2</sub> = t <sub>3</sub> x 1.137)	TRV rise time (t <sub>3</sub> )	RRRV = uc/t <sub>3</sub>	Cable-charging	Cable-charging current	Isolated shunt capacitor bank	"Isolated shunt capacitor bank current"	Back-to-back capacitor bank	Back-to-back capacitor bank current	Inrush current	Inrush frequency	Out-of-phase voltage = 1.44 x V	Out-of-phase current = 0.25 x I
Units	A rms	Duty cycle③	kV peak	µsec	µsec	kV/µsec	Class	A rms	Class	A rms	Class	A rms	Class	kA peak	kHz	kV rms	kA rms
5VCP-W25	1200	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	3-10	C2	75-630	C2	75-630	6	0.8	7	6.3	
	2000	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	3-10	C2	75-1000	C2	75-1000	6	0.5	7	6.3	
	3000	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	3-10	C2	75-1600	C2	75-1600	6	0.3	7	6.3	
5VCP-W32	1200	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	3-10	C2	75-630	C2	75-630	6	0.8	7	10	
	2000	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	3-10	C2	75-1000	C2	75-1000	6	0.5	7	10	
	3000	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	3-10	C2	75-1600	C2	75-1600	6	0.3	7	10	
5VCP-W40	1200	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	3-10	C2	75-630	C2	75-630	6	0.8	7	10	
	2000	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	3-10	C2	75-1000	C2	75-1000	6	0.5	7	10	
	3000	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	3-10	C2	75-1600	C2	75-1600	6	0.3	7	10	
5VCP-W50	1200	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	3-10	C2	75-630	C2	75-630	6	0.8	7	12.5	
	2000	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	3-10	C2	75-1000	C2	75-1000	6	0.5	7	12.5	
	3000	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	3-10	C2	75-1600	C2	75-1600	6	0.3	7	12.5	
50VCP-W63④	1200	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	7.5-25	C2	75-630	C2	75-630	6	0.8	7	15.8	
	2000	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	7.5-25	C2	75-1000	C2	75-1000	6	0.5	7	15.8	
	3000	0-0.3s-CO-3m-CO	8.2	50	44	0.19	C2	7.5-25	C2	75-1600	C2	75-1600	6	0.3	7	15.8	
8VCP-W40	1200	0-0.3s-CO-3m-CO	14.1	59	52	0.27	C2	7.5-25	C2	75-630	C2	75-630	6	0.8	12	10	
	2000	0-0.3s-CO-3m-CO	14.1	59	52	0.27	C2	7.5-25	C2	75-1000	C2	75-1000	6	0.5	12	10	
	3000	0-0.3s-CO-3m-CO	14.1	59	52	0.27	C2	7.5-25	C2	75-1600	C2	75-1600	6	0.3	12	10	
8VCP-W50	1200	0-0.3s-CO-3m-CO	14.1	59	52	0.27	C2	7.5-25	C2	75-630	C2	75-630	6	0.8	12	12.5	
	2000	0-0.3s-CO-3m-CO	14.1	59	52	0.27	C2	7.5-25	C2	75-1000	C2	75-1000	6	0.5	12	12.5	
	3000	0-0.3s-CO-3m-CO	14.1	59	52	0.27	C2	7.5-25	C2	75-1600	C2	75-1600	6	0.3	12	12.5	
15VCP-W25	1200	0-0.3s-CO-3m-CO	25.7	75	66	0.39	C2	7.5-25	C2	75-630	C2	75-630	6	0.8	22	6.3	
	2000	0-0.3s-CO-3m-CO	25.7	75	66	0.39	C2	7.5-25	C2	75-1000	C2	75-1000	6	0.5	22	6.3	
	3000	0-0.3s-CO-3m-CO	25.7	75	66	0.39	C2	7.5-25	C2	75-1600	C2	75-1600	6	0.3	22	6.3	
15VCP-W32	1200	0-0.3s-CO-3m-CO	25.7	75	66	0.39	C2	7.5-25	C2	75-630	C2	75-630	6	0.8	22	10	
	2000	0-0.3s-CO-3m-CO	25.7	75	66	0.39	C2	7.5-25	C2	75-1000	C2	75-1000	6	0.5	22	10	
	3000	0-0.3s-CO-3m-CO	25.7	75	66	0.39	C2	7.5-25	C2	75-1600	C2	75-1600	6	0.3	22	10	
15VCP-W40	1200	0-0.3s-CO-3m-CO	25.7	75	66	0.39	C2	7.5-25	C2	75-630	C2	75-630	6	0.8	22	10	
	2000	0-0.3s-CO-3m-CO	25.7	75	66	0.39	C2	7.5-25	C2	75-1000	C2	75-1000	6	0.5	22	10	
	3000	0-0.3s-CO-3m-CO	25.7	75	66	0.39	C2	7.5-25	C2	75-1600	C2	75-1600	6	0.3	22	10	
15VCP-W50	1200	0-0.3s-CO-3m-CO	25.7	75	66	0.39	C2	7.5-25	C2	75-630	C2	75-630	6	0.8	22	12.5	
	2000	0-0.3s-CO-3m-CO	25.7	75	66	0.39	C2	7.5-25	C2	75-1000	C2	75-1000	6	0.5	22	12.5	
	3000	0-0.3s-CO-3m-CO	25.7	75	66	0.39	C2	7.5-25	C2	75-1600	C2	75-1600	6	0.3	22	12.5	
150VCP-W63④	1200	0-0.3s-CO-3m-CO	28	75	66	0.39	C2	7.5-25	C2	75-630	C2	75-630	6	0.8	22	15.8	
	2000	0-0.3s-CO-3m-CO	28	75	66	0.39	C2	7.5-25	C2	75-1000	C2	75-1000	6	0.5	22	15.8	
	3000	0-0.3s-CO-3m-CO	28	75	66	0.39	C2	7.5-25	C2	75-1600	C2	75-1600	6	0.3	22	15.8	

- ① Circuit breakers shown in this table were tested in accordance with IEEE standard C37.09-2018.
- ② All circuit breakers were tested at 60 Hz, and can not be applied at 50 Hz per C37.09-2018. If 50 Hz is required, use VCP-W Legacy breaker offering. Contact Eaton for required ratings.
- ③ For reclosing service, there is No derating necessary for Eaton's VCP-W family of circuit breakers. R = 100 % Type VCP-W breaker can perform the O-C-O per IEEE C37.09; O-0.3s-CO-15s-CO per IEC 56; and some VCP-Ws have performed O-0.3s-CO-15s-CO-15s-CO-15s-CO; all with no derating. Contact Eaton for special reclosing requirements.
- ④ These circuit breakers do not come with the upgraded pole units and were tested to earlier versions of the IEEE standards and can be applied at 50 Hz with no derating.

**Table 3. 27 kV VCP-W (k=1) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards (continued on next page).**

Identification		Rated values <sup>①</sup>												
Drawout circuit breaker type	Maximum voltage (V)	Nominal three-phase MVA class	Rated voltage range factor	Insulation level		Rated continuous current at 60 Hz	Short-circuit ratings (reference C37.04-1999 and C37.06-2009 except as noted <sup>①</sup> )							
				Power frequency withstand voltage (1 min.)	Lightning impulse withstand voltage (1.2 x 50 µs)		Symmetrical interrupting current (I)	% dc component	Asymmetrical interrupting current (It)	Closing and latching current	Short-time withstand current	Interrupting time	Interrupting time (cycles at 60 Hz)	No-load (mechanical endurance)
Units	kV rms		K	kV rms	kV peak	A rms	kA rms sym. <sup>②</sup>	% <sup>③</sup>	kA rms asym. total <sup>④</sup>	kA peak <sup>⑤</sup>	kA rms <sup>⑥</sup>	ms	Cycles	<sup>⑦</sup>
270 VCP-W 16	27	750	1	60	125	600	16	50	19.5	43	16	50 or 83	3 or 5	2500
	27	750	1	60	125	1200	16	50	19.5	43	16	50 or 83	3 or 5	2500
	27	750	1	60	125	2000	16	50	19.5	43	16	50 or 83	3 or 5	2500
270 VCP-W 22	27	1000	1	60	125	600	22	50	26.8	59	22	50 or 83	3 or 5	2500
	27	1000	1	60	125	1200	22	50	26.8	59	22	50 or 83	3 or 5	2500
	27	1000	1	60	125	2000	22	50	26.8	59	22	50 or 83	3 or 5	2500
270 VCP-W 25	27	1250	1	60	125	600	25	50	30.5	68	25	50 or 83	3 or 5	2500
	27	1250	1	60	125	1200	25	50	30.5	68	25	50 or 83	3 or 5	2500
	27	1250	1	60	125	2000	25	50	30.5	68	25	50 or 83	3 or 5	2500
270 VCP-W 32	27	1500	1	60	125	1200	31.5	50	38.4	85	31.5	50 or 83	3 or 5	2500
	27	1500	1	60	125	2000	31.5	50	38.4	85	31.5	50 or 83	3 or 5	2500
270 VCP-W 40	27	1870	1	60	125	1200	40	50	48.8	106	40	50 or 83	3 or 5	2500
	27	1870	1	60	125	2000	40	50	48.8	106	40	50 or 83	3 or 5	2500
270 VCP-W 25C	27	1200	1	60	125	1200	25	75	36	85	25	50	3	5000
	27	1600	1	60	125	1600	25	75	36	85	25	50	3	5000
270 VCP-W 32C	27	1200	1	60	125	1200	31.5	55	40	100	31.5	50	3	5000
	27	1600	1	60	125	1600	31.5	55	40	100	31.5	50	3	5000
270 VCP-W 40C	27	1200	1	60	125	1200	40	50	49	112	40	50	3	5000
	27	1600	1	60	125	1600	40	50	49	112	40	50	3	5000

- ① All circuit breakers are tested at 60 Hz; however, they can also be applied at 50 Hz with no derating.
- ② Because the voltage range factor K = 1, the short-time withstand current and the maximum symmetrical interrupting current are equal to the rated symmetrical interrupting current.
- ③ Based on the standard dc time constant of 45 ms (corresponding to X/R of 17 for 60 Hz) and the minimum contact parting time as determined from the minimum opening time plus the assumed minimum relay time of 1/2 cycle (8.33 ms for 60 Hz).
- ④ The asymmetrical interrupting current, I total, is given by (I<sub>t</sub>) = I x Sqrt (1 + 2 x % dc x % dc) kA rms asymmetrical total.
- ⑤ K=1 breakers were tested to 2.6 \* I and K>1 breakers were tested to 2.7 \* I.
- ⑥ Duration of short-time current and maximum permissible tripping delay are both two seconds for all circuit breakers listed in this table, as required in C37.04-1999, C37.06-2000 and C37.06-2009.
- ⑦ Each operation consists of one closing plus one opening.

**Table 3. 27 kV VCP-W (k=1) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards.①**

Identification	Rated values②															
Drawout circuit breaker type	Continuous current	Operating duty	TRV peak voltage (E2) = (Uc)	TRV time to peak (T2 = t3 x 1.137)	TRV rise time (t3)	RRRV = uc/t3	Cable-charging④	Cable-charging current	Isolated shunt capacitor bank④	Isolated shunt capacitor bank current	Back-to-back capacitor bank current④	Back-to-back capacitor bank current	Inrush current	Inrush frequency	Out-of-phase voltage = 1.44 x V	Out-of-phase current = 0.25 x I
Units	A rms	Duty cycle③	kV peak	µsec	µsec	kV/µsec	Class	A rms	Class	A rms	Class	A rms	kA peak	kHz	kV rms	kA rms
270 VCP-W 16	600	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
	1200	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
	2000	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
270 VCP-W 22	600	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
	1200	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
	2000	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
270 VCP-W 25	600	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
	1200	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
	2000	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
270 VCP-W 32	1200	CO-15s-CO	51	52	45.7	1.12	DP	31.5	GP	160	—	—	—	—	—	—
	2000	CO-15s-CO	51	52	45.7	1.12	DP	31.5	GP	160	—	—	—	—	—	—
270 VCP-W 40	1200	CO-15s-CO	51	52	45.7	1.12	DP	31.5	GP	160	—	—	—	—	—	—
	2000	CO-15s-CO	51	52	45.7	1.12	DP	31.5	GP	160	—	—	—	—	—	—
270 VCP-W 25C	1200	0-0.3s-CO-15s-CO	50	50	44	1.14	—	—	GP	400	DP	400	20	4.2	—	—
	1600	0-0.3s-CO-15s-CO	50	50	44	1.14	—	—	GP	400	DP	400	20	4.2	—	—
270 VCP-W 32C	1200	0-0.3s-CO-15s-CO	50	50	44	1.14	—	—	GP	400	DP	400	20	4.2	—	—
	1600	0-0.3s-CO-15s-CO	50	50	44	1.14	—	—	GP	400	DP	400	20	4.2	—	—
270 VCP-W 40C	1200	0-0.3s-CO-15s-CO	50	50	44	1.14	—	—	GP	400	DP	400	20	4.2	—	—
	1600	0-0.3s-CO-15s-CO	50	50	44	1.14	—	—	GP	400	DP	400	20	4.2	—	—

① Circuit breakers shown in this table were tested in accordance with IEEE standard C37.09-1979.

② All circuit breakers are tested at 60 Hz; however, they can also be applied at 50 Hz with no derating.

③ For reclosing service, there is No derating necessary for Eaton's VCP-W family of circuit breakers. R = 100%. Contact Eaton for special reclosing requirements.

④ General Purpose (GP) and Definite Purpose (DP) are defined in C37.09-1999. Based on the definitions of these terms, GP is similar to C0 and DP is similar to C1 as defined in C37.09a-2005.

**Table 4. 27 kV VCP-WR (k=1) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards (continued on next page)**

Identification	Rated values <sup>①</sup>													
	Drawout circuit breaker type	Maximum	Nominal MVA class	Rated voltage	Insulation level			Short-circuit ratings (reference C37.04-1999 and C37.06-2009 except as noted <sup>①</sup> )						
Power frequency (1 min.)					Lightning impulse (1.2 x 50 µs)	Rated continuous current at 60 Hz	Symmetrical Current (I)	% dc	Asymmetrical current (It)	Closing and latching current	Short-time current	Interrupting time	Interrupting time (cycles at 60 Hz)	No-load mechanical endurance
Units	kV rms		K	kV rms	kV peak	A rms	kA rms sym. <sup>②</sup>	% <sup>③</sup>	kA rms asym. total <sup>④</sup>	kA peak <sup>⑤</sup>	kA rms <sup>④</sup>	ms	Cycles <sup>⑦</sup>	⑧
270 VCP-WR 16	27	750	1	60	125	600	16	50	19.5	43	16	83 or 50	5 or 3	2500
	27	750	1	60	125	1200	16	50	19.5	43	16	83 or 50	5 or 3	2500
	27	750	1	60	125	2000	16	50	19.5	43	16	83 or 50	5 or 3	2500
270 VCP-WR 22	27	1000	1	60	125	600	22	50	26.8	59	22	83 or 50	5 or 3	2500
	27	1000	1	60	125	1200	22	50	26.8	59	22	83 or 50	5 or 3	2500
	27	1000	1	60	125	2000	22	50	26.8	59	22	83 or 50	5 or 3	2500
270 VCP-WR 25	27	1250	1	60	125	600	25	50	30.5	68	25	83 or 50	5 or 3	2500
	27	1250	1	60	125	1200	25	50	30.5	68	25	83 or 50	5 or 3	2500
	27	1250	1	60	125	2000	25	50	30.5	68	25	83 or 50	5 or 3	2500
270 VCP-WR 32	27	1500	1	60	125	1200	31.5	50	38.4	85	31.5	83 or 50	5 or 3	2500
	27	1500	1	60	125	2000	31.5	50	38.4	85	31.5	83 or 50	5 or 3	2500
270 VCP-WR 40	27	1870	1	60	125	1200	40	50	48.8	106	40	83 or 50	5 or 3	2500
	27	1870	1	60	125	2000	40	50	48.8	106	40	83 or 50	5 or 3	2500
270 VCP-WR 25C	27	—	1	60	125	1200	25	75	36	85	25	83 or 50	5 or 3	5000
	27	—	1	60	125	2000	25	75	36	85	25	83 or 50	5 or 3	5000
270 VCP-WR 32C	27	—	1	60	125	1200	31.5	55	40	100	31.5	83 or 50	5 or 3	5000
	27	—	1	60	125	2000	31.5	55	40	100	31.5	83 or 50	5 or 3	5000
270 VCP-WR 40C	27	—	1	60	125	1200	40	50	49	112	40	83 or 50	5 or 3	5000
	27	—	1	60	125	2000	40	50	49	112	40	83 or 50	5 or 3	5000

- ① All circuit breakers are tested at 60 Hz; however, they can also be applied at 50 Hz with no derating.
- ② Because the voltage range factor K = 1, the short-time withstand current and the maximum symmetrical interrupting current are equal to the rated symmetrical interrupting current.
- ③ Based on the standard dc time constant of 45 ms (corresponding to X/R of 17 for 60 Hz) and the minimum contact parting time as determined from the minimum opening time plus the assumed minimum relay time of 1/2 cycle (8.33 ms for 60 Hz).
- ④ The asymmetrical interrupting current, I total, is given by  $I_t = I \times \sqrt{1 + 2 \times \% \text{ dc} \times \% \text{ dc}}$  kA rms asymmetrical total.
- ⑤ K=1 breakers were tested to 2.6 \* I and K>1 breakers were tested to 2.7 \* I.
- ⑥ Duration of short-time current and maximum permissible tripping delay are both two seconds for all circuit breakers listed in this table, as required in C37.04-1999, C37.06-2000 and C37.06-2009.
- ⑦ All circuit breakers are available as 3 or 5 cycle breakers.
- ⑧ Each operation consists of one closing plus one opening.

**Table 4: 27 kV VCP-WR (k=1) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards.**

Identification	Rated values <sup>②</sup>															
Drawout circuit breaker type	Continuous current	Operating duty	TRV peak voltage (E2) = (U <sub>c</sub> )	TRV time to peak (T2 = t3 x 1.137)	TRV rise time (t3)	RRRV = uc/t3	Cable-charging <sup>④</sup>	Cable-charging current	Isolated shunt capacitor bank <sup>④</sup>	Isolated shunt capacitor bank current	Back-to-back capacitor bank current <sup>④</sup>	Back-to-back capacitor bank current	Inrush current	Inrush frequency	Out-of-phase voltage = 1.44 x V	Out-of-phase current = 0.25 x I
Units	A rms	Duty cycle <sup>③</sup>	kV peak	μsec	μsec	kV/μsec	Class	A rms	Class	A rms	Class	A rms	kA peak	kHz	kV rms	kA rms
270 VCP-WR 16	600	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
	1200	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
	2000	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
270 VCP-WR 22	600	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
	1200	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
	2000	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
270 VCP-WR 25	600	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
	1200	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
	2000	CO-15s-CO	51	105	92.3	0.55	—	—	—	—	—	—	—	—	—	—
270 VCP-WR 32	1200	CO-15s-CO	51	52	45.7	1.12	DP	31.5	GP	160	—	—	—	—	—	—
	2000	CO-15s-CO	51	52	45.7	1.12	DP	31.5	GP	160	—	—	—	—	—	—
270 VCP-WR 40	1200	CO-15s-CO	51	52	45.7	1.12	DP	31.5	GP	160	—	—	—	—	—	—
	2000	CO-15s-CO	51	52	45.7	1.12	DP	31.5	GP	160	—	—	—	—	—	—
270 VCP-WR 25C	1200	O-0.3s-CO-15s-CO	50	50	44	1.14	—	—	GP	400	DP	400	20	4.2	—	—
	2000	O-0.3s-CO-15s-CO	50	50	44	1.14	—	—	GP	400	DP	400	20	4.2	—	—
270 VCP-WR 32C	1200	O-0.3s-CO-15s-CO	50	50	44	1.14	—	—	GP	400	DP	400	20	4.2	—	—
	2000	O-0.3s-CO-15s-CO	50	50	44	1.14	—	—	GP	400	DP	400	20	4.2	—	—
270 VCP-WR 40C	1200	O-0.3s-CO-15s-CO	50	50	44	1.14	—	—	GP	400	DP	400	20	4.2	—	—
	2000	O-0.3s-CO-15s-CO	50	50	44	1.14	—	—	GP	400	DP	400	20	4.2	—	—

① Circuit breakers shown in this table were tested in accordance with IEEE standard C37.09-1979.

② All circuit breakers are tested at 60 Hz; however, they can also be applied at 50 Hz with no derating.

③ For reclosing service, there is No derating necessary for Eaton's VCP-W family of circuit breakers. R = 100%. Contact Eaton for special reclosing requirements.

④ General Purpose (GP) and Definite Purpose (DP) are defined in C37.09-1999. Based on the definitions of these terms, GP is similar to CO and DP is similar to C1 as defined in C37.09a-2005.

**Table 5. 5-27 kV VCP-WC (k=1) extra capability vacuum circuit breaker rated symmetrical current basis, per ANSI standards.**

Identification Circuit breaker type	Rated voltage															Mech- anical endur- ance			
	Voltage		Insulation level withstand test			Short circuit current						Interrupting time ①	Max. permissible tripping delay Sec.	Transient recovery voltage (RRRV) ③	Capacitor switching ratings				
	Max. voltage V	Voltage range factor K	Power frequency (1 min.)	Lightening impulse 1.2x50µs	Continuous current at 60 Hz	Sym interrupting at V (Isc)	% DC component (kC)	Asym. interrupting (It)	Closing & latching capability	Short-time current for 3 sec.	Isolated shunt capacitor bank current				Definite purpose			No-load operations	
															Back to back capacitor switching				
kV rms		kV rms	kV peak	A rms	kA rms total	%	kA rms	kA peak	kA rms	Cycles		kV / µs	A rms	A rms	kA peak	kHz			
50 VCP-W 40C	5.95	1	24	75	1200 2000 3000	40	75.	58	139	40	3	2	0.9 0.9 0.8		630⑤ 1000⑤	15 18	3.5 2.7	10,000 10,000 5,000	
50 VCP-W 50C	5.95	1	24	75	1200 2000 3000	50	57 57 52	64 64 62	139	50	3	2	0.9 0.9 0.8		630⑤ 1000⑤	15 18	3.5 2.7	10,000 10,000 5,000	
75 VCP-W 50C	10.3	1	42	95	1200 2000 3000	50	57 57 52	64 64 62	139	50	3	2	0.9 0.9 0.8		630⑤ 1000⑤	15 18	3.5 2.7	10,000 10,000 5,000	
150 VCP-W 25C	17.5	1	42	95	1200 2000 3000	25	50 75 75	31 36 36	97 ②	25	3	2	0.95 0.9 0.8		600④ 1000⑤④	20 18	3.5 2.7	10,000 10,000 5,000	
150 VCP-W 40C	17.5	1	42	95	1200 2000 3000	40	75	58	139	40	3	2	0.9 0.9 0.8	630 ④ 630 ④ 250 ④	630⑤⑥ 1000⑤④	15 18	3.5 2.7	10,000 10,000 5,000	
150 VCP-W 50C	17.5	1	42	95	1200 2000 3000	50	57 57 52	64 64 62	139	50	3	2	0.9 0.9 0.8	630 ④ 630 ④ 250 ④	630⑤⑥ 1000⑤④	15 18	3.5 2.7	10,000 10,000 5,000	
150 VCP-W 63C	17.5	1	42	95	1200 2000 3000	63	61 61 61	83 83 83	175	63	3	2	1.07 1.07 1.07		200, 1600⑨ 200, 1600⑨ 200, 1600⑨	7.7 7.7 7.7	465 465 465	10,000 10,000 10,000	
270 VCP-W 25C	27	1	60	125	1200 1600	25	75	36	85	25⑦	3	2	1.1		400	20	4.2	2,500	
270 VCP-W 32C	27	1	60	125	1200 1600	31.5	57	40	97	32⑦	3	1	1.1		400	20	4.2	2,500	
270 VCP-W 40C	27	1	60	125	1200 1600	40	50	49	104	40⑦	3	1	1.1		400	20	4.2	2,500	

① 3 cycles  
 ② Close & latch current for 1200 A Type 150 VCP-W 25C is proven at 15 kV. For sealed interrupters at high altitudes, switching voltage is not de-rated.  
 ③ For higher RRRV contact Eaton for more information.  
 ④ Breaker tested to 2700 A single bank switching for momentary load (Thermal derating must consider harmonic content of current waveform).  
 ⑤ Breaker tested to 1270 A back-to-back switching for momentary load (Thermal derating must consider harmonic content of current waveform)  
 ⑥ Capacitor switching ratings are proven at 15 kV. For sealed interrupters at high altitudes, switching voltage is not de-rated.  
 ⑦ 1 second  
 ⑧ 2 second  
 ⑨ C37.04a-2003 class C2 @ 15 kV

**Table 6. 5/15 kV VCP-W (MVA) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards.**

Identification	Rated values <sup>①②</sup>			Insulation level			Short-circuit ratings (reference C37.04-1999 and C37.06-2009 except as noted) <sup>①</sup>							
	Maximum voltage (V)	Nominal three-phase MVA class	Rated voltage range factor	Power frequency withstand voltage (1 min.)	Lightning impulse withstand voltage (1.2 x 50 $\mu$ s)	Rated continuous current at 60 Hz	Symmetrical interrupting current (I)	%dc Component	Asymmetrical interrupting current (It)	Closing and latching current	Short-time withstand current	Interrupting time	Interrupting time (cycles at 60 Hz)	No-load (mechanical endurance)
Units	kV rms		K	kV rms	kV peak	A rms <sup>①③</sup>	kA rms sym.	% <sup>④</sup>	kA rms asym. total <sup>④</sup>	kA peak <sup>⑤</sup>	kA rms <sup>④</sup>	ms	Cycles <sup>⑦</sup>	<sup>⑧</sup>
5VCP-W250	4.76	250	1	19	60	1200	36	40	41	97	36	83/50	5/3	10,000
	4.76	250	1	19	60	2000	36	40	41	97	36	83/50	5/3	10,000
	4.76	250	1	19	60	3000	36	39	41	97	36	83/50	5/3	10,000
5VCP-W350	4.76	350	1	19	60	1200	49	40	56	132	49	83/50	5/3	10,000
	4.76	350	1	19	60	2000	49	40	56	132	49	83/50	5/3	10,000
	4.76	350	1	19	60	3000	49	39	56	132	49	83/50	5/3	10,000
8VCP-W500	8.25	500	1	36	95	1200	41	40	47	108	41	83/50	5/3	10,000
	8.25	500	1	36	95	2000	41	40	47	108	41	83/50	5/3	10,000
	8.25	500	1	36	95	3000	41	39	47	111	41	83/50	5/3	10,000
15VCP-W500	15	500	1	36	95	1200	23	41	26	62	23	83/50	5/3	10,000
	15	500	1	36	95	2000	23	41	26	62	23	83/50	5/3	10,000
	15	500	1	36	95	3000	23	39	26	62	23	83/50	5/3	10,000
15VCP-W750	15	750	1	36	95	1200	36	40	41	97	36	83/50	5/3	10,000
	15	750	1	36	95	2000	36	40	41	97	36	83/50	5/3	10,000
	15	750	1	36	95	3000	36	39	41	97	36	83/50	5/3	10,000
15VCP-W1000	15	1000	1	36	95	1200	48	40	55	130	48	83/50	5/3	10,000
	15	1000	1	36	95	2000	48	40	55	130	48	83/50	5/3	10,000
	15	1000	1	36	95	3000	48	39	55	130	48	83/50	5/3	10,000

- ① All circuit breakers are tested at 60 Hz and can not be applied at 50 Hz per C37.09-2018. If 50 Hz is required use VCP-W Legacy breaker offering. Contact Eaton for required ratings.
- ② All breakers listed in this chart are UL Listed.
- ③ 3000 A rated breakers can be fan-cooled for use in 4000 A rated switchgear.
- ④ All breakers tested to C37.09-2018 meet the requirements for the last pole to clear during asymmetrical T100a tests defined by Table 2, and can safely be applied at the rated asymmetrical interrupting current and % dc offset as calculated by the equations within C37.09-2018 and C37.04-2018. Ratings are based on a dc time constant of 45 ms (corresponding to X/R of 17 for 60 Hz) and determined using the circuit breaker minimum opening time plus the assumed minimum relay time of ½ cycle (8.33 ms for 60 Hz).
- ⑤ These breakers were tested to (2.6 \* I) for Close and Latch.
- ⑥ Duration of short-time current and maximum permissible tripping delay are both two seconds for all circuit breakers listed in this table, as required in C37.04-2018 and C37.09-2018.
- ⑦ All circuit breakers are available as 3 or 5 cycle breakers.
- ⑧ Each operation consists of one closing plus one opening.

**Table 7. 5/15 kV VCP-W (MVA) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards.①**

Identification		Rated values②														
Drawout circuit breaker type	Continuous current	Operating duty	TRV peak voltage (E2) = (Uc)	TRV time to peak (T2 = t3 x 1.157)	TRV rise time (t3)	RRRV = uc/k3	Cable-charging	Cable-charging current	Isolated shunt capacitor bank	Isolated shunt capacitor bank current	Back-to-back capacitor bank	Back-to-back capacitor bank current	Inrush current	Inrush frequency	Out-of-phase voltage = 1.44 x V	Out-of-phase current = 0.25 x I
5VCP-W250	1200	0-0.3s-CO-3m-CO	8.9	50	44	0.20	C2	3-10	C2	75-630	C2	75-630	6	0.8	7	10
	2000	0-0.3s-CO-3m-CO	8.9	50	44	0.20	C2	3-10	C2	75-1000	C2	75-1000	6	0.5	7	10
	3000	0-0.3s-CO-3m-CO	8.9	50	44	0.20	C2	3-10	C2	75-1600	C2	75-1600	6	0.3	7	10
5VCP-W350	1200	0-0.3s-CO-3m-CO	8.9	50	44	0.20	C2	3-10	C2	75-630	C2	75-630	6	0.8	7	12.5
	2000	0-0.3s-CO-3m-CO	8.9	50	44	0.20	C2	3-10	C2	75-1000	C2	75-1000	6	0.5	7	12.5
	3000	0-0.3s-CO-3m-CO	8.9	50	44	0.20	C2	3-10	C2	75-1600	C2	75-1600	6	0.3	7	12.5
5VCP-W500	1200	0-0.3s-CO-3m-CO	8.9	50	44	0.20	C2	3-10	C2	75-630	C2	75-630	6	0.8	7	10
	2000	0-0.3s-CO-3m-CO	8.9	50	44	0.20	C2	3-10	C2	75-1000	C2	75-1000	6	0.5	7	10
	3000	0-0.3s-CO-3m-CO	8.9	50	44	0.20	C2	3-10	C2	75-1600	C2	75-1600	6	0.3	7	10
8VCP-W500	1200	0-0.3s-CO-3m-CO	15.5	60	53	0.29	C2	3-10	C2	75-630	C2	75-630	6	0.8	12	10
	2000	0-0.3s-CO-3m-CO	15.5	60	53	0.29	C2	3-10	C2	75-1000	C2	75-1000	6	0.5	12	10
	3000	0-0.3s-CO-3m-CO	15.5	60	53	0.29	C2	3-10	C2	75-1600	C2	75-1600	6	0.3	12	10
15VCP-W500	1200	0-0.3s-CO-3m-CO	28	75	66	0.42	C2	3-10	C2	75-630	C2	75-630	6	0.8	22	6.3
	2000	0-0.3s-CO-3m-CO	28	75	66	0.42	C2	3-10	C2	75-1000	C2	75-1000	6	0.5	22	6.3
	3000	0-0.3s-CO-3m-CO	28	75	66	0.42	C2	3-10	C2	75-1600	C2	75-1600	6	0.3	22	6.3
15VCP-W750	1200	0-0.3s-CO-3m-CO	28	75	66	0.42	C2	3-10	C2	75-630	C2	75-630	6	0.8	22	10
	2000	0-0.3s-CO-3m-CO	28	75	66	0.42	C2	3-10	C2	75-1000	C2	75-1000	6	0.5	22	10
	3000	0-0.3s-CO-3m-CO	28	75	66	0.42	C2	3-10	C2	75-1600	C2	75-1600	6	0.3	22	10
15VCP-W1000	1200	0-0.3s-CO-3m-CO	28	75	66	0.42	C2	3-10	C2	75-630	C2	75-630	6	0.8	22	12.5
	2000	0-0.3s-CO-3m-CO	28	75	66	0.42	C2	3-10	C2	75-1000	C2	75-1000	6	0.5	22	12.5
	3000	0-0.3s-CO-3m-CO	28	75	66	0.42	C2	3-10	C2	75-1600	C2	75-1600	6	0.3	22	12.5

① Circuit breakers shown in this table were tested in accordance with IEEE standard C37.09-2018.

② All circuit breakers were tested at 60 Hz, and can not be applied at 50 Hz per C37.09-2018.

③ For reclosing service, there is No derating necessary for Eaton's VCP-W family of circuit breakers. R = 100% Type VCP-W breaker can perform the O-C-O per IEEE C37.09; O-0.3s-CO-15s-CO per IEC 56; and some VCP-Ws have performed O-0.3s-CO-15s-CO-15s-CO-15s-CO; all with no derating. Contact Eaton for special reclosing requirements.

**Table 8. 15 kV VCP-WXC (k=1) circuit breaker rated on symmetrical current basis (standard ratings), per ANSI Standards①.**

See Figure 24 for control schemes and diagram that apply to this breaker. This breaker differs from the standard breaker with the addition of a third motor cut-off switch and addition of two wires.

Identification	Rated voltage																	
	Voltage		Insulation level withstand test		Continuous current at 60 Hz	Short circuit current					Interrupting time ②	Max. permissible tripping delay	Transient recovery voltage (RRRV) ③	Capacitor switching ratings				Mechanical endurance
	Max. voltage V	Voltage range factor K	Power frequency (1 min.)	Lightening impulse 1.2x50µs		Sym. interrupting at V (Isc)	% DC component (Idc)	Asym. interrupting (It)	Closing & latching capability	Short-time current for 3 sec.				General purpose	Definite purpose			
					Isolated shunt capacitor bank current						Capacitor bank current	Inrush current	Inrush frequency					
kV rms		kV rms	kV peak	A rms	kA rms total	%	kA rms	kA peak	kA rms	Cycles	Sec.	kV / µs	A rms	A rms	kA peak	kHz		
150 VCP-WXC 63	17.5	1	42	95	1200	63	61	83	175s	63	5	2	1.07		200,1600(9)	7.7	465	10,000
					2000		61	83							200,1600(9)	7.7	465	10,000
					3000		61	83							200,1600(9)	7.7	465	5,000

① All circuit breakers are tested to 60 Hz; however, they can also be applied at 50 Hz with no derating.

② Optional interrupting time of 3 cycles is available.

③ For higher RRRV contact Eaton for more information.



**Table 9. 5/15 kV VCP-WND (MVA) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards.**

Identification	Rated values <sup>①</sup>					Short-circuit ratings (reference C37.04-1999 and C37.06-2009 except as noted <sup>①</sup> )								
	Maximum voltage (V)	Nominal three-phase MVA class	Rated voltage range factor	Insulation level	Rated continuous current at 60 Hz	Symmetrical interrupting current (I)	%dc component	Asymmetrical interrupting current (It)	Closing and latching current	Short-time withstand current	Interrupting time	Interrupting time (cycles at 60 Hz)	No-load (mechanical endurance)	
Drawout circuit breaker type	Power frequency withstand voltage (1 min.)	Lightning impulse withstand voltage (1.2 x 50 μs)	Power frequency withstand voltage (1 min.)	Lightning impulse withstand voltage (1.2 x 50 μs)										
Units	kV rms		K <sup>②</sup>	kV rms	kV peak	A rms <sup>③</sup>	kA rms sym <sup>④</sup>	% <sup>⑤</sup>	kA rms asym total <sup>⑥</sup>	kA peak <sup>⑦</sup>	kA rms <sup>⑧</sup>	ms	Cycles <sup>⑨</sup>	<sup>⑩</sup>
50VCP-WND250 <sup>⑩</sup>	4.76	250	1.24	19	60	1,200	29	50	35	97	36	83/50	5/3	10,000

- ① All circuit breakers are tested at 60 Hz; however, they can also be applied at 50 Hz with no derating.
- ② For three-phase and line-to-line faults, the symmetrical interrupting capability at an operating voltage

$$I_{sc} = \frac{V}{V_0} \quad (\text{Rated short-circuit current})$$

**But not to exceed KI.**

Single line-to-ground fault capacity at an operating voltage.

$$I_{sc} = 1.15 \frac{V}{V_0} \quad (\text{Rated short-circuit current})$$

**But not to exceed KI.**

The above apply on predominately inductive or resistive three-phase circuits with normal-frequency line-to-line recovery voltage equal to the operating voltage.

- ③ 4000 A fan-cooled rating is available for 3000 A circuit breakers.
- ④ Where the voltage range factor K = 1, the short-time withstand current and the maximum symmetrical interrupting current are equal to the rated symmetrical interrupting current.
- ⑤ Based on the standard dc time constant of 45 ms (corresponding to X/R of 17 for 60 Hz) and the minimum contact parting time as determined from the minimum opening time plus the assumed minimum relay time of 1/2 cycle (8.33 ms for 60 Hz).
- ⑥ The asymmetrical interrupting current, I total, is given by  $I_t = I \times \text{Sqrt}(1 + 2 \times \%dc \times \%dc)$  kA rms asymmetrical total.
- ⑦ K=1 breakers were tested to 2.6 \* I and K>1 breakers were tested to 2.7 \* KI.
- ⑧ Duration of short-time current and maximum permissible tripping delay are both 2 seconds for all circuit breakers listed in this table, as required in C37.04-1999, C37.06-2000 and C37.06-2009.
- ⑨ All circuit breakers are available as 3 or 5 cycle breakers.
- ⑩ Each operation consists of one closing plus one opening.
- ⑪ This breaker is UL listed.

**Table 10. 5/15 kV VCP-WND (MVA) vacuum circuit breaker types rated on symmetrical current rating basis, per ANSI standards (continued).** <sup>①</sup>

Identification	Rated values <sup>②</sup>															
	Continuous current	Operating duty	TRV peak voltage (E2) = (Uc)	TRV time to peak (T2 = t3 x 1.137)	TRV rise time (t3)	RRRV = uc/t3	Cable-charging <sup>④</sup>	Cable-charging current	Isolated shunt capacitor bank <sup>④</sup>	Isolated shunt capacitor bank current	Back-to-back capacitor bank <sup>④</sup>	Back-to-back capacitor bank current	Inrush current	Inrush frequency	Out-of-phase voltage = 1.44 x V	Out-of-phase current = 0.25 x I
Units	A rms	Duty cycle <sup>③</sup>	kV peak	μsec	μsec	kV/ μsec	Class	A rms	Class	A rms	Class	A rms	kA peak	kHz	kV rms	kA rms
50VCP-WND250	1200	CO—15s—CO	8.9	44	0.2	—	—	—	—	—	—	—	—	—	—	—


- ① Circuit breakers shown in this table were tested in accordance with IEEE standard C37.09-1979.
- ② All circuit breakers are tested at 60 Hz; however, they can also be applied at 50 Hz with no derating.
- ③ For reclosing service, there is No derating necessary for Eaton's VCP-W family of circuit breakers. R = 100%. Type VCP-W breaker can perform the O-C-O per ANSI C37.09; O-0.3s-CO-15s-CO per IEC 56; and some VCP-Ws have performed O-0.3s-CO-15s-CO-15s-CO-15s-CO; all with no derating. Contact Eaton for special reclosing requirements.
- ④ General Purpose (GP) and Definite Purpose (DP) are defined in C37.09-1999. Based on the definitions of these terms, GP is similar to C0 and DP is similar to C1 as defined in C37.09a-2005.

**Table 11. (IEC-56 Standards<sup>①</sup>) 175 kV VCP-W vacuum circuit breaker rated on symmetrical current basis.**

Identification Circuit breaker type	Rated values							
	Voltage class	Insulation level		Normal current	Short circuit breaking current	3 second short time current	Short circuit making current	Cable charging breaking amps
		Power frequency	Impulse withstand					
kV rms	kV rms	kV peak	Amperes	kA rms	kA rms	kV peak	Amperes	
36VCPW-ND25 36VCPW-ND32	3.6 3.6	10 10	40 40	630, 1250 630, 1250	25 31.5	25 31.5	63 79	25 25
72VCPW-ND25 72VCPW-ND32	7.2 7.2	20 20	60 60	630, 1250 630, 1250	25 31.5	25 31.5	63 79	25 25
36VCP-W25 36VCP-W32 36VCP-W40	3.6 3.6 3.6	10 10 10	40 40 40	630, 1250, 2000 1250, 2000 1250, 2000	25 31.5 40	25 31.5 40	63 79 100	25 25 25
72VCP-W25 72VCP-W32 72VCP-W40	7.2 7.2 7.2	20 20 20	60 60 60	630, 1250, 2000 1250, 2000 1250, 2000	25 31.5 40	25 31.5 40	63 79 100	25 25 25
120VCP-W25 120VCP-W32 120VCP-W40	12.0 12.0 12.0	28 28 28	75 75 75	630, 1250, 2000 1250, 2000 1250, 2000	25 31.5 40	25 31.5 40	63 79 100	25 25 25
175VCP-W25 175VCP-W32 175VCP-W40	17.5 17.5 17.5	38 38 38	95 95 95	1250, 2000 1250, 2000 1250, 2000	25 31.5 40	25 31.5 40	63 79 100	31.5 31.5 31.5

① Interrupting time is 3 cycles at 50/60 Hz. Rated operating sequence 0-3 min- CO-3 min-CO.


**1.4 Outlines and dimensions**

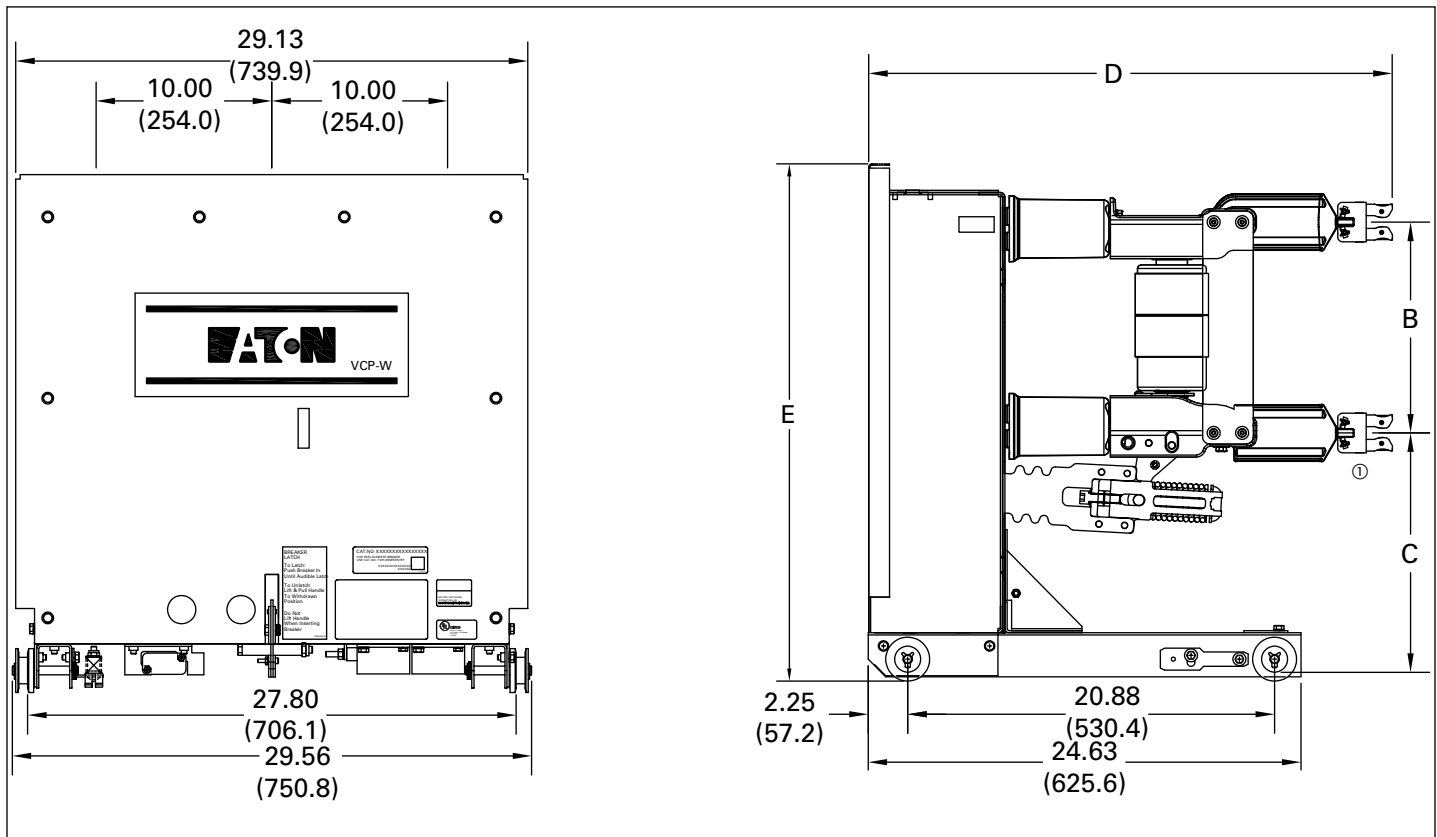

Breaker Identification	A	B	C	D	E
1200/2000 A 5, 8, 15 VCP-W & VCP-WSE <=40 kA	10 (254.00)	12 (304.80)	13.63 (346.20)	29.81 (757.17)	29.44 (747.78)
1200/2000 A 5, 8, 15 VCP-W & VCP-WSE 50 kA	10 (254.00)	12 (304.80)	13.63 (346.20)	29.81 (757.17)	31.44 (798.58)
All 3000 A VCP-W, VCPW-SE.	10 (254.00)	12 (304.80)	13.63 (346.20)	29.94 (760.48)	31.44 (798.58)

① All 63kA & 3000A have round finger clusters.

**Figure 1. Type VCP-W (K = 1 & MVA) and VCPW-SE circuit breaker outlines and dimensions in inches (mm), enhanced pole unit shown.**

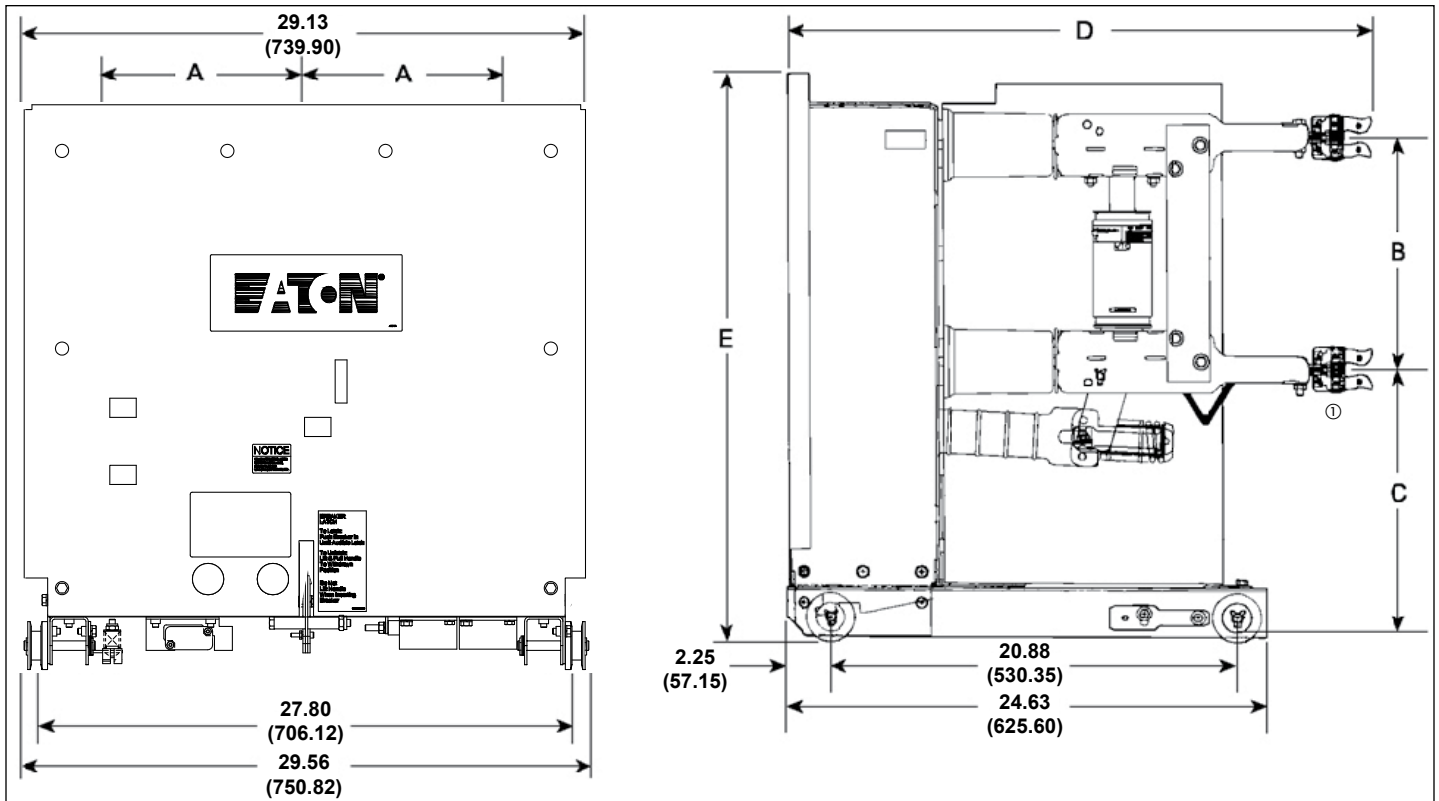

Breaker Identification	A	B	C	D	E
240 VCP-W, 270 VCP-W & 270 VCP-WC	10 (254.00)	14 (355.60)	16.25 (412.75)	34.80 (883.92)	35.22 (894.59)
50 VCP-W350C, 150 VCP-W1000C, 150 VCP-W63, all 3000 A VCP-WC and IEC except those immediately below	10 (254.00)	12 (304.80)	13.63 (346.20)	29.94 (760.48)	31.44 (798.58)
50 VCP-W25C & 150 VCP-W75C, 1200 A	10 (254.00)	12 (304.80)	13.63 (346.20)	29.81 (757.17)	29.44 (747.78)

① All 63kA, 3000A, & 27 kV have round finger clusters.

Figure 2. Type VCP-W, VCP-WC, and IEC circuit breaker outlines and dimensions in inches (mm).

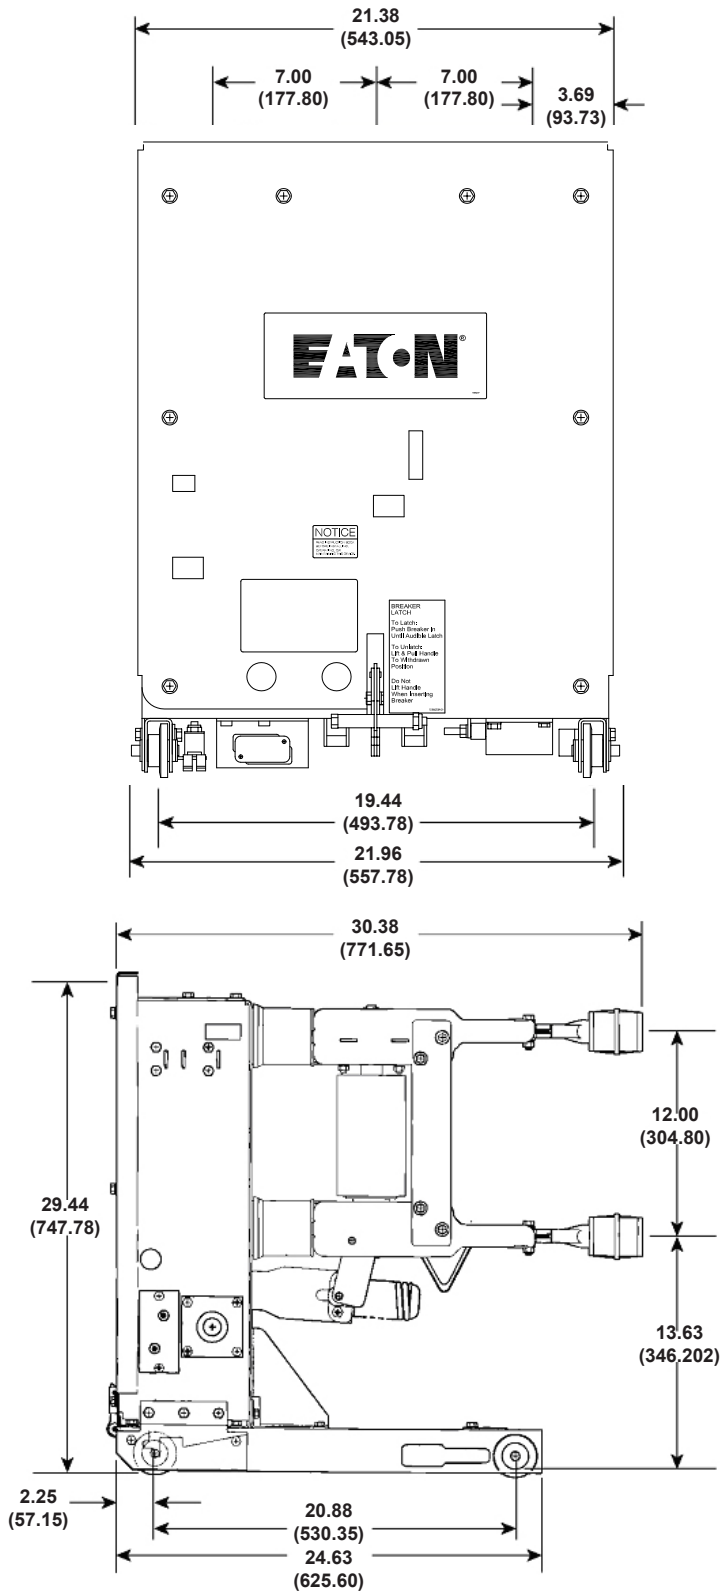


Figure 3. Type VCPW-ND circuit breaker outlines and dimensions in inches (mm).

## 2. Safe practices

### 2.1 Recommendations

Type VCP-W vacuum circuit breaker elements are equipped with high speed, high energy operating mechanisms. They are designed with several built-in interlocks and safety features to provide safe and proper operating sequences.

---

#### **WARNING**

---

**TO PROTECT THE PERSONNEL ASSOCIATED WITH INSTALLATION, OPERATION, AND MAINTENANCE OF THESE CIRCUIT BREAKER ELEMENTS, THE FOLLOWING PRACTICES MUST BE FOLLOWED.**

---

- Only qualified persons as defined in section 6.2.1 and with respect to the local electric code, who are familiar with the installation and maintenance of medium voltage circuits and equipment, should be permitted to work on these circuit breaker elements.
- Read these instructions carefully before attempting any installation, operation or maintenance of these breakers.
- Always remove the breakers from the enclosure before performing any maintenance. Failure to do so could result in electrical shock leading to death, severe personal injury, or property damage.
- BE EXTREMELY CAREFUL while the circuit breaker is on the extension rails. Use provided rail clamps to firmly hold the circuit breaker on the extension rails while performing such activities as charging, closing, and tripping. Carelessness could cause the circuit breaker to fall from the rails resulting in personal injury to those in the area.
- Do not work on a closed breaker or a breaker with closing springs charged. The closing spring should be discharged and the main contacts open before working on the breaker. Failure to do so could result in cutting or crushing injuries.
- Do not use a circuit breaker by itself as the sole means of isolating a high voltage circuit. Remove the breaker to the DISCONNECT position and follow good lockout and tagging rules, as well as all applicable codes, regulations, and work rules.
- Do not leave the breaker in an intermediate position in the cell. Always have the breaker either in the TEST or CONNECTED position. Failure to do so could result in a flash over and possible death, personal injury, or property damage.
- Always remove the maintenance tool from the breaker after charging the closing springs.
- Breakers are equipped with safety interlocks. Do not defeat them. This may result in death, bodily injury, or equipment damage.

## 3. Receiving, handling, and storage

### 3.1 General

Type VCP-W vacuum circuit breaker elements are subjected to complete factory production tests and inspection before being packed. They are shipped in packages designed to provide maximum protection to the equipment during shipment and storage and at the same time to provide convenient handling. Tools, such as the maintenance tool, are shipped separately.

### 3.2 Receiving

If the circuit breaker element is not to be used immediately but is to be placed in storage, maximum protection can be obtained by keeping it packed as shipped.

Upon receipt of the equipment, inspect the containers for any signs of damage or rough handling. Open the containers carefully to avoid any damage to the contents. Use a nail puller rather than a crow bar when required. When opening the containers, be careful to save any loose items or hardware that may be otherwise discarded with the packing material. Check the contents of each package against the packing list.

Examine the circuit breaker element for any signs of shipping damage such as broken, missing, or loose hardware, damaged or deformed insulation, and other components. File claims immediately with the carrier if damage or loss is detected and notify the nearest Eaton office.

### 3.3 Handling

---

#### **CAUTION**

---

**DO NOT USE ANY LIFTING DEVICE AS A PLATFORM FOR PERFORMING MAINTENANCE, REPAIR, OR ADJUSTMENT OF THE BREAKER OR FOR OPENING, CLOSING THE CONTACTS OR CHARGING THE SPRINGS. THE CIRCUIT BREAKER ELEMENT MAY SLIP OR FALL CAUSING SEVERE PERSONAL INJURY. ALWAYS PERFORM MAINTENANCE, REPAIR, AND ADJUSTMENTS ON A SOLID WORK SURFACE CAPABLE OF SUPPORTING THE BREAKER ELEMENT.**

---

When a breaker element is ready for installation, a lifting yoke in conjunction with an overhead lifter or portable floor lifter can be used to move a breaker element. When a breaker element is to be lifted, position the lifting yoke over the breaker element and insert lifters into the breaker element side openings with the lifting hole toward the interrupters. Once the lifting yoke is securely seated in the holes, the breaker element can be carefully lifted and moved. Also, a breaker lift pan in conjunction with the portable floor lifter can be used to create a breaker lifter. The breaker can be placed or rolled onto the lift pan with the conductors arms pointing away from the lifter (see IB022015EN for more details).

### 3.4 Storage

If the circuit breaker element is to be placed in storage, maximum protection can be obtained by keeping it packed as shipped. Before placing it in storage, checks should be made to make sure that the breaker element is free from shipping damage and is in satisfactory operating condition.

The circuit breaker element is shipped with its contacts open and closing springs discharged. The indicators on the front panel should confirm this. Insert the maintenance tool in the manual charge socket opening (Figure 6). Charge the closing springs by pumping the handle up and down approximately 28 to 38 times until a crisp metallic "click" is heard. This indicates that the closing springs are charged and is shown by the closing spring "charged" (yellow) indicator. Remove the maintenance tool. Operate the push-to-close button. The breaker element will close as shown by the breaker contacts "closed" (red) indicator. Operate the push-to-open button. The breaker element will trip as shown by the breaker contacts "open" (green) indicator. After completing this initial check, leave the closing springs "discharged" and breaker contacts "open".

Outdoor storage of the breaker element is NOT recommended. If unavoidable, the outdoor location must be well drained and a temporary shelter from sun, rain, snow, corrosive fumes, dirt, falling objects, and excessive moisture must be provided. Containers should be arranged to permit free circulation of air on all sides and temporary heaters should be used to minimize condensation. Moisture can cause rusting of metal parts and deterioration of high voltage insulation. A heat level of approximately 400 watts for each 100 cubic feet (2.83 cubic meters) of volume is recommended with the heaters distributed uniformly throughout the structure near the floor.

Indoor storage should be in a building with sufficient heat and air circulation to prevent condensation. If the building is not heated, the same general rule for heat as for outdoor storage should be applied.

### 3.5 Switchgear foundation criteria

The equipment must be placed on a true and level surface to allow for proper functioning of the doors and drawout components. The finished foundation surface is defined as flat and level within 0.06 in. (1.6 mm) in 36 in. (914 mm) in any direction, left to right, front to back, and diagonally. Alternatively, a local flatness "FF" value of 50 or higher and an accompanying "FL" value of 37 to 40 as defined in industry standard American Society for Testing and Materials (ASTM) E1155-96 and industry standard American Concrete Institute (ACI) 117-90 may be used to establish the flatness and levelness of the finished foundation.

Design the foundation so it will be strong enough to support the weight of the switchgear without sagging. Be sure to take into account the shock or impact weight that occurs when the breaker trips and when it closes. The impact weight is 1.5 times the weight of the breaker.

Careful preparation of the foundation is important for simplicity of erection, ease of operation, and good performance. The recommended foundation consists of steel channels embedded in a level concrete floor for indoor switchgear. The channels shall be level within 0.06 in. over 36 in. (0.318 mm in 914.4 mm) left to right, front to rear, and diagonally, as measured by a laser level. In no case may the non-supporting areas of the concrete floor be higher than the tops of the steel channels. For outdoor switchgear, the same levelness and flatness criteria should apply to the supporting foundation for the outdoor house.

The anchor bolts, channels, and other materials are to be furnished by the purchaser of the switchgear. A 4 in. (106.6 mm) structural channel is recommended as the minimum size for the average indoor switchgear system.

### 3.6 Shipping breakers in switchgear

Eaton has received inquiries from both OEMs and end-use customers regarding whether it is acceptable to ship 5 kV to 27 kV breakers installed in switchgear cells. The answer depends on the construction of the switchgear and the weight of the breakers being shipped in the switchgear.

The OEM and the end-use customer will need to determine if the structure is rigid enough to handle shipping breakers of varying weights in their switchgear without causing any permanent damage to the switchgear structure, breaker cell parts, breakers and accessories. This is true for both one high and two high switchgear configurations. **Eaton does not recommend shipping stand-alone NEMA 1 switchgear with the breakers installed.**

The OEM and the end-use customer should consider the following when they are making the decision on whether or not to ship the breakers in the switchgear cells:

1. A welded structure is more rigid than a bolted structure;
2. Switchgear installed in an outdoor house consisting of a rigid structural base and walls that prevent bowing during shipping and installation will have less chance of being damaged. Also, the wall construction should prevent the switchgear from going out of square during shipping;
3. The quality of the roads that will be used to ship the outdoor house to the site; and
4. Will the switchgear require any type of ocean travel? Depending on the time of year, ocean travel can be much more demanding on a structure than road travel.

After the determination has been made to ship the breakers in the switchgear cells, then the following criteria should be followed.

- The breaker should be shipped in the "Connected" position with the breaker "Open".
- The accessories like the truck operated cell (TOC) switch and the mechanism operated cell (MOC) switch must have temporary restrictions (tie downs) designed and installed to prevent interaction with the breaker while being shipped and installed. Only after the switchgear has been placed in its permanent location should these tie downs be removed.

Once the switchgear has been installed on the site, it is the responsibility of the OEM or end-use customers to ensure that no damage has occurred to the following items in the breaker switchgear cell and the breaker:

- Ground contacts;
- Secondary disconnect;
- Close floor tripper;
- Levering latch;
- Trip floor tripper;
- Breaker cell rails;
- Code plates;
- MOC operator; and
- TOC operator.

Depending on the construction site location, the road conditions may require additional shipping bracing be added to protect the breakers, even more than normal. It is up to the OEM or end-use customers to determine the conditions of the roads that the trucking company will utilize and if any additional shipping bracing is required.

If the OEM or end-use customers decides that their structure is rigid enough to safely support the weight of the breakers during shipping, then they need to take pictures of all the cells with the breakers fully racked in to the "Connect" position and the breaker "Open". Also, they need to take pictures of all the shipping bracing that was installed per cell prior to shipping and then after the switchgear is installed prior to removal of the shipping tie downs. If for some reason the breakers or the switchgear cell parts are damaged, then Eaton will request to see these pictures first prior to going to the site to investigate any damage to the breakers, cell components or accessories. **All repair cost associated with resolving these issues due to shipping damage will be the responsibility of the OEM or end-use customers to collect against their shipper.**

### 3.7 Tools and accessories

Tools and accessories, both standard and optional, are available for use with the circuit breaker element (Figure 4). If not specified accessories can be used for 36 in. wide and 26 in. wide breakers.

**Spin-free levering-in crank:** Used to crank breaker between DISCONNECT, TEST, and CONNECTED positions (Required).

**Extension rails:** Permits breaker to be withdrawn from its compartment (Required).

**Rail clamps:** Used to secure breaker to extension rails.

**Lifting yoke:** Used to lift breaker (Required).

**Manual charging handle:** Used to charge closing springs manually (Required).

**Portable lifter:** Used to lift breaker to or from extended rails.

**Breaker lift pan:** This accessory enables the breaker to be lifted from the ground to any height cell without the extension rails. It consists of a portable lifter and a MV breaker lift pan.

- Portable lifter;
- MV breaker lift pan with short extension rail kit for 36" or 26" wide breaker.

**Drawout ramp:** Used to insert or withdraw breaker from lower compartment without portable lifter.

**Docking transport dolly:** Used to insert or withdraw breaker from lower compartment without portable lifter or move breaker from one location to another.

#### Electrical levering-in device:

*BPI pan assembly:*

Integral Motorized Racking (MR2) used to electrically move breaker between DISCONNECT/TEST, or DISCONNECT, TEST, and CONNECTED positions is available. Specified by description as opposed to a style number.

If the external electric levering-in device which mounts to the door or pan assembly is used, then the breaker can be moved between the DISCONNECT and CONNECTED positions.

The process of levering the breaker from the DISCONNECT to the TEST position would need to be performed manually (approximately 6 turns).

*Non-BPI pan assembly:*

Used to electrically move the breaker between DISCONNECT/TEST and CONNECTED positions.

**Truck operated cell (TOC) switch:** Indicates when breaker is in the CONNECT position. Furnished with standard push on wire terminals. Optional ring tongue terminals are available.

**Mechanism operated cell (MOC) switch:** Provides additional normally open and closed contacts for when control and protection scheme exceeds the available auxiliary contacts in the breaker. Furnished with standard push on wire terminals. Optional ring tongue terminals are available.

This feature is available in two different configurations:

- 1.) Functions in both the TEST and CONNECT positions, or
- 2.) Functions only in the CONNECT position.

Eaton strongly recommends use of the TEST and CONNECT position configuration.

**Test jumper:** Used to operate breaker electrically while breaker is on extension rails or transport dolly.

**Test cabinet:** Used to provide power to operate breaker outside its compartment for the purpose of testing functionality.

**Key provisions with positional interlock:** This enables locking of the levering-in cage when the breaker is in the TEST position with a padlock or keyed cylinder lock.

**Wheel conversion kit (MG & TD only):** Due to how the manual ground and test device is designed this is the best direct roll-in wheel kit to use.

**Wheel conversion kit for direct roll-in:** This wheel kit can be used to convert a standard breaker or electrical ground and test device to a direct roll-in version.

**Conversion kit ROF to non-ROF:** This kit is used to convert a direct roll-in cell to a non direct roll-in cell. It provides the teeter totter feature that prevents removing a breaker from the breaker cell when the extension rails or MV breaker lift pan are not in place. Also, the short ramp feature in the front of each rail would need to be removed.

**Conversion kit non-ROF to ROF:** This kit is used to convert a non-direct roll-in cell to a direct roll-in cell. It provides the ramp feature that goes on the end of each rail to help guide the steel wheels on the side of the breaker up onto the rail rolling surface. This is only to be used in the lower switchgear cells that are level with the floor. The teeter totter feature that keeps the breaker from being rolled out of the cell would need to be removed.

**Secondary conversion kit:** This kit converts an automatic secondary in a BPI pan assembly to a manual enabled automatic secondary. When the release lever is raised above the stop feature the secondaries will slide forward to automatically connect, see section 8.2 for more details.





**Closed door racking guide:** This feature can be added to the front of the BPI pan assembly to provide a guide for the manual levering-in tool when the switchgear door is closed to guide the levering-in crank socket onto the levering-in drive screw nut.

**Table 12. Accessories for 36-inch wide breaker compartments for 29-inch frame breaker.**




		Description	Style number
 5A/5B TOC switch	 5A/5B MOC switch	TOC (truck-operated cell) switch 4A/5B contacts	1C20006G12
		TOC (truck-operated cell) switch 4A/5B contacts ring-tongue terminals	1C20006G15
 Standard set of accessories		MOC (mechanism-operated cell) switch	
		5A/4B contacts (test and connect)	1C20007G12
		5A/4B contacts (connect only)	1C20007G13
		10A/8B contacts (test and connect)	1C20007G14
		10A/8B contacts (connect only)	1C20007G15
		15A/12B contacts (test and connect)	1C20007G16
		15A/12B contacts (connect only)	1C20007G17
		5A/4B contacts (test and connect) ring-tongue terminals	1C20007G28
		5A/4B contacts (connect only) ring-tongue terminals	1C20007G29
		10A/8B contacts (test and connect) ring-tongue terminals	1C20007G30
 Portable lifter		10A/8B contacts (connect only) ring-tongue terminals	1C20007G31
		15A/12B contacts (test and connect) ring-tongue terminals	1C20007G32
		15A/12B contacts (connect only) ring-tongue terminals	1C20007G33
		Spin-free levering-in crank with clutch	701B601G11
		Extension rails (right and left, one set)	7813C41G03
		Set of rail clamps	6511C83G11
		Lifting yoke	691C607G11
		Manual charging handle	8064A02G11
		Standard set of accessories	1A30136G02
	 Portable lifter and lift pan		Spin-free levering-in crank with clutch
		Extension rails (right and left, one set)	
		Manual charging handle	
		Set of rail clamps	
		Portable lifter (26-/36-inch convertible)	1C19086H01
		MV breaker lift pan	1C20220G01
 Optional accessories include (clockwise): lifting yoke, test cabinet, spin-free levering-in crank, and test jumper		Drawout ramp	1C14163G08
		Docking transport dolly	6510C71G21
		Electrical external levering-in device	1A30257G01
		Test jumper	6526C23G11
		Test cabinet	
		Any DC close and any trip	8346A28G21
		AC or DC close and DC trip	8346A28G22
		120 Vac close and capacitor trip	8346A28G23
		240 Vac close and capacitor trip	8346A28G60
		AC or DC charge, DC close and trip	8346A28G24
	Key provisions with positional Interlock This allows for key locking the levering-in cage when the breaker is in the TEST position.	6510C48G22	
	Wheel conversion kit (MG & TD only)	68C5010G41	
	Wheel conversion kit for direct roll-in	68C5010G42	
	Conversion kit ROF to NON-ROF	1C19779G101	
	Conversion kit NON- ROF to ROF	1C19779G102	
	Secondary conversion kit: to convert automatic secondary to manual operation	1C20335G01	
	Closed door racking guide	1C20339G02	
	Grease in 14oz. container (Prod. code - U0497)	53702AML00	
	Contact wax (Prod. code - U0497)	83342CE	




**Table 13. Narrow design accessories for 26-inch-wide breaker compartments.**

	Description	Style number
 <p>Set of ND accessories</p>	TOC (truck-operated cell) switch 4A/3B contacts	7797C20G01
	MOC (mechanism-operated cell) switch	
	4A/3B contacts (test and connect)	7797C24G02
	4A/3B contacts (connect only)	7797C24G03
	8A/6B contacts (test and connect)	7797C24G04
	8A/6B contacts (connect only)	7797C24G05
	12A/9B contacts (test and connect)	7797C24G06
	Spin-free levering-in crank with clutch	701B601G11
	Primary contact spanner wrench	502A850G01
	Extension rails (right and left, one set)	7813C41G03
Set of rail clamps	6511C83G12	
Lifting yoke	691C607G02	
Manual charging handle	8064A02G11	
Set of ND accessories	1A30136G04	
 <p>ND 4A/3B TOC switch</p>	 <p>ND 4A/3B MOC switch</p>	Spin-free levering-in crank with clutch
		Primary contact spanner wrench
	Extension rails (right and left, one set)	
	Manual charging handle	
	Set of rail clamps	
 <p>Electric levering-in device</p>	 <p>Padlock/key interlock</p>	Portable lifter (26-/36-inch convertible)
		MV breaker lift pan and short extension rail kit
	Drawout ramp	
	Docking transport dolly	
	Electrical external levering-in device	
	Test jumper	
	Test cabinets	
	Any DC close and any trip	8346A28G41
	AC or DC close and DC trip	8346A28G42
	120 Vac close and capacitor trip	8346A28G43
	240 Vac close and capacitor trip	8346A28G60
	Padlock/key provisions with positional interlock	6510C48G01
	Includes the padlock assembly plus a positional interlock. This allows for key locking the levering-in cage when the breaker is locked in the DISCONNECT position	
	Grease in 14oz. container (Prod. code - U0497)	53702AML00
	Contact wax (Prod. code - U0497)	83342CE

**Table 14. 27 kV VCP-W accessories.**

	Description	Style number
 <p>Epoxy stand-off insulator</p>	TOC (truck operated cell) switch	5A/5B contacts
	TOC (direct roll-in)	
	MOC (mechanism operated cell) switch	5A/4B contacts (test and connect)
		5A/4B contacts (connect only)
		10A/8B contacts (test and connect)
		10A/8B contacts (connect only)
		15A/12B contacts (test and connect)
		15A/12B contacts (connect only)
 <p>Epoxy cable support</p>	Spin-free levering-in crank	701B601G11
	Standard levering-in crank	701B601G12
	Extension rails (right and left—one set)	7813C41G03
	Set of rail clamps	6511C83G11
 <p>Capacitor trip device</p>	Lifting yoke	691C607G11
	Manual charging handle	8064A02G11
	Standard set of 27 kV accessories	Levering-in crank with clutch manual charging handle
		Wheel kit (for direct roll-in)
	Portable lifter	1C19086H01
	MV breaker lift pan	1C20220G01
	Drawout ramp	1C14163G02
	Docking transport dolly	6510C71G11
	Electrical external levering-in device	1A30257G01
	Test cabinet	Any DC close and any trip
	AC or DC close and DC trip	
	120 Vac close and capacitor trip	
	240 Vac close and capacitor trip	
	Test jumper	
	120 Vac capacitor trip device	
	240 Vac capacitor trip device	
	27 kV epoxy cable support	
	8.25 inch epoxy stand-off insulator	
	Grease in 14oz. container (Prod. code - U0497)	
	Contact wax (Prod. code - U0497)	




5A/5B TOC switch



5A/5B MOC switch



Electrical levering-in device



Standard accessories include (clockwise): Left and right removable extension rails, manual charging handle, and levering crank



Optional accessories include (clockwise): lifting yoke, test cabinet, spin-free levering crank, and test jumper




Portable lifter






Portable lifter and lift pan

**Ground and test device (G&TD) accessories:** Eaton offers a broad spectrum of manual and electrical G&TDs. All of the manual G&TDs provide access to all the line and load terminals to enable phase checking. Also, they provide the ability to verify operation of the voltage sensing equipment against a live source while verifying that the other connection does not have any voltage present prior to applying the grounds. The simple electrical G&TDs only provide access to line or load terminals. One of the designs provides the ability to perform cable testing as well as grounding the desired circuit.

**Table 15. 15 kV simple manual ground and test devices—bus bar type.**

	Description	25 and 40 kA	50 kA	63 kA
		Style number	Style number	Style number
 <p>Simple manual ground and test device</p>	Upper and lower terminals 1200 A (26" narrow design)	4A35130G01	—	—
	Upper and lower terminals 1200/2000 A	66A5092G42	66A5092G02	66A5092G12
	Upper and lower terminals 3000 A	66A5092G43	66A5092G03	66A5092G13
	Upper terminals only 1200/2000 A	66A5092G44	66A5092G04	66A5092G14
	Lower terminals only 1200/2000 A	66A5092G45	66A5092G05	66A5092G15
	Upper terminals only 3000 A	66A5092G46	66A5092G06	66A5092G16
	Lower terminals only 3000 A	66A5092G47	66A5092G07	66A5092G17
	Upper and lower terminals 1200/2000 A with ROF wheels installed	66A5092G82	66A5092G62	66A5092G72
	Upper and lower terminals 3000 A with ROF wheels installed	66A5092G83	66A5092G63	66A5092G73
	Upper terminals only 1200/2000 A with ROF wheels installed	66A5092G84	66A5092G64	66A5092G74
	Lower terminals only 1200/2000 A with ROF wheels installed	66A5092G85	66A5092G65	66A5092G75
	Upper terminals only 3000 A with ROF wheels installed	66A5092G86	66A5092G66	66A5092G76
	Lower terminals only 3000 A with ROF wheels installed	66A5092G87	66A5092G67	66A5092G77

**Table 16. 15 kV VCP-W simple manual ground and test device—"bail" and "ball" type ①.**

	Description	Style number
		Style number
 <p>Bail type manual ground and test device</p>  <p>Bail connector</p>  <p>Ball connector</p>	Bail 1200/2000 A upper/lower	66A5201G01
	Bail 3000 A upper/lower	66A5201G02
	Ball 1200/2000 A upper/lower	66A5291G01
	Ball 3000 A upper/lower	66A5291G02
	Bail 1200/2000 A upper/lower with ROF wheels installed	66A5201G11
	Bail 3000 A upper/lower with ROF wheels installed	66A5201G12
	Ball 1200/2000 A upper/lower with ROF wheels installed	66A5291G11
	Ball 3000 A upper/lower with ROF wheels installed	66A5291G12

① Cables are not provided

**Table 17. 15 kV complex manual (selectable) ground and test device.**



	Description	Style number
		Style number
 <p>Ground and test device</p>	1200/2000/3000 A, 50 kA with ROF	94G7092G712
	1200/2000/3000 A, 50 kA (standard, non-ROF)	94G7091G711


Table 18. 15 kV simple electrically operated ground and test device.

Description	25 and 40 kA	50 kA	63 kA
	Style number	Style number	Style number
<b>Without roll-on-floor wheels (ROF) factory installed</b>			
<b>Upper terminal</b>			
1200/2000 A, 48 Vdc	66A5302G75	—	—
1200/2000 A, 125 Vdc or 120 Vac	66A5302G76	—	—
1200/2000 A, 250 Vdc or 240 Vac	66A5302G77	—	—
1200/2000 A, 48 Vdc	—	66A5302G02	—
1200/2000 A, 125 Vdc or 120 Vac	—	66A5302G03	—
1200/2000 A, 250 Vdc or 240 Vac	—	66A5302G04	—
3000 A, 48 Vdc	—	66A5302G05	—
3000 A, 125 Vdc or 120 Vac	—	66A5302G06	—
3000 A, 250 Vdc or 240 Vac	—	66A5302G07	—
1200/2000/3000 A, 48 Vdc	—	—	66A5302G12
1200/2000/3000 A, 125 Vdc or 120 Vac	—	—	66A5302G13
1200/2000/3000 A, 250 Vdc or 240 Vac	—	—	66A5302G14
<b>Lower terminal</b>			
1200/2000 A, 48 Vdc	66A5302G85	—	—
1200/2000 A, 125 Vdc or 120 Vac	66A5302G86	—	—
1200/2000 A, 250 Vdc or 240 Vac	66A5302G87	—	—
1200/2000 A, 48 Vdc	—	66A5302G22	—
1200/2000 A, 125 Vdc or 120 Vac	—	66A5302G23	—
1200/2000 A, 250 Vdc or 240 Vac	—	66A5302G24	—
3000 A, 48 Vdc	—	66A5302G25	—
3000 A, 125 Vdc or 120 Vac	—	66A5302G26	—
3000 A, 250 Vdc or 240 Vac	—	66A5302G27	—
1200/2000/3000 A, 48 Vdc	—	—	66A5302G32
1200/2000/3000 A, 125 Vdc or 120 Vac	—	—	66A5302G33
1200/2000/3000 A, 250 Vdc or 240 Vac	—	—	66A5302G34
<b>With roll-on-floor wheels (ROF) factory installed</b>			
<b>Upper terminal</b>			
1200/2000 A, 48 Vdc with ROF	66A5302G53	—	—
1200/2000 A, 125 Vdc or 120 Vac with ROF	66A5302G54	—	—
1200/2000 A, 250 Vdc or 240 Vac with ROF	66A5302G55	—	—
1200/2000 A, 48 Vdc with ROF	—	66A5302G35	—
1200/2000 A, 125 Vdc or 120 Vac with ROF	—	66A5302G36	—
1200/2000 A, 250 Vdc or 240 Vac with ROF	—	66A5302G37	—
3000 A, 48 Vdc with ROF	—	66A5302G38	—
3000 A, 125 Vdc or 120 Vac with ROF	—	66A5302G39	—
3000 A, 250 Vdc or 240 Vac with ROF	—	66A5302G40	—
1200/2000/3000 A, 48 Vdc with ROF	—	—	66A5302G41
1200/2000/3000 A, 125 Vdc or 120 Vac with ROF	—	—	66A5302G42
1200/2000/3000 A, 250 Vdc or 240 Vac with ROF	—	—	66A5302G43
<b>Lower terminal</b>			
1200/2000 A, 48 Vdc with ROF	66A5302G57	—	—
1200/2000 A, 125 Vdc or 120 Vac with ROF	66A5302G58	—	—
1200/2000 A, 250 Vdc or 240 Vac with ROF	66A5302G59	—	—
1200/2000 A, 48 Vdc with ROF	—	66A5302G44	—
1200/2000 A, 125 Vdc or 120 Vac with ROF	—	66A5302G45	—
1200/2000 A, 250 Vdc or 240 Vac with ROF	—	66A5302G46	—
3000 A, 48 Vdc with ROF	—	66A5302G47	—
3000 A, 125 Vdc or 120 Vac with ROF	—	66A5302G48	—
3000 A, 250 Vdc or 240 Vac with ROF	—	66A5302G49	—
1200/2000/3000 A, 48 Vdc with ROF	—	—	66A5302G50
1200/2000/3000 A, 125 Vdc or 120 Vac with ROF	—	—	66A5302G51
1200/2000/3000 A, 250 Vdc or 240 Vac with ROF	—	—	66A5302G52



Simple electrically operated ground and test device


**Table 19. 15 kV simple electrically operated ground and test device for VCP-W without key interlocks.**

	Description	Style number
	<b>Lower terminal</b>	
	1200/2000 A, 125 Vdc or 120 Vac, 40 kA with ROF	66A5312G45

Electrically operated ground and test device

Note: These units are also available as direct-roll-on-the-floor products via a separately purchased wheel kit.


**Table 20. 15 kV simple electrically operated ground and test device for VCP-WXC.**

	Description	Style number
	<b>Upper terminal</b>	
	1200/2000/3000 A, 125 Vdc or 120 Vac, 63 kA	66A5302G83
	<b>Lower terminal</b>	
	1200/2000/3000 A, 125 Vdc or 120 Vac, 63 kA	66A5302G93

Electrically operated ground and test device

Note: These units are also available as direct-roll-on-the-floor products via a separately purchased wheel kit.

**Table 21. 15 kV VCP-W CEG&TD 1200/2000/3000 A - product code: 6078R.**

	Description	25 and 40 kA Style number	50 kA Style number
	<b>Without roll-on-floor wheels (ROF) factory installed</b>		
	1200/2000 A, 48 Vdc	83C4950G21	83C4950G01
	1200/2000 A, 125/120	83C4950G22	83C4950G02
	1200/2000 A, 250/240	83C4950G23	83C4950G03
	3000 A, 48 Vdc	–	83C4950G11
	3000 A, 125/120	–	83C4950G12
	3000 A, 250/240	–	83C4950G13
	<b>With roll-on-floor wheels (ROF) factory installed</b>		
	1200/2000 A, 48 Vdc	83C4950G71	83C4950G51
	1200/2000 A, 125/120	83C4950G72	83C4950G52
	1200/2000 A, 250/240	83C4950G73	83C4950G53
	3000 A, 48 Vdc	–	83C4950G61
	3000 A, 125/120	–	83C4950G62
	3000 A, 250/240	–	83C4950G63


VCP-W CEG&TD 1200/2000/3000 A

**Table 22. 15 kV VCP-W CEG&TD accessories.**

		Description	Style number
 <p style="text-align: center;">692C899H03</p>		Replacement voltage probe – 1 probe (692C899H01)	81A4936G01
		Replacement voltage probe – 3 probes (692C899H01)	81A4936G02
		Replacement CEGTD SP probe - 1 probe (692C899H03)	81A4936G05
		Replacement CEGTD SP probe - 3 probes (692C899H03)	81A4936G06
		SP. No insert probe - 1 probe (692C899H11)	81A4936G11
		SP. No insert probe - 3 probes (692C899H11)	81A4936G12
		15kV, 50kA 1200/2000A finger cluster conversion kit	83C4864G03
		15kV, 25/40kA 1200/2000A finger cluster conversion kit	83C4864G04
		BPI cell position indication label for CEG&TD ①	1C19649H13
 <p style="text-align: center;">692C899H01</p>		 <p style="text-align: center;">692C899H11</p>	

① One of these is required for every switchgear cell that will accommodate a CEG&TD.

**Table 23. 27 kV manual ground and test device.**

		Description	Style number
		1200/2000 A, bus bar type—top and bottom studs	1C94354G01
		1200/2000 A, bus bar type—top and bottom studs with factory installed wheel kit	1C94354G11
		1200/2000 A, ball type—top and bottom studs	66A5296G01
		1200/2000 A, ball type—top and bottom studs with factory installed wheel kit	66A5296G11

27 kV simple manual ground and test device—bus bar type



Ball type



Ball connector

**Table 24. Dummy elements<sup>①</sup>.**

Description	Style number
5 kV, 1200 A (up to 50 kA)	691C605G03
5 kV, 2000 A (up to 50 kA)	691C605G04
5 kV, 3000 A (up to 63 kA)	691C605G05
15 kV, 1200 A (up to 50 kA)	691C605G06
15 kV, 2000 A (up to 50 kA)	691C605G07
15 kV, 3000 A (up to 63 kA) <sup>②</sup>	691C605G08
27 kV, 1200 A	694C651G01
27 kV, 2000 A	694C651G02

<sup>①</sup> Dummy elements applicable for breakers rated VCP-W MVA, VCP-W K = 1, and VCP-WSE.

<sup>②</sup> Dummy element also applicable for VCP-WXC breaker.

**3.8 Type VCP-W vacuum circuit breaker element weights  
(Tables 25, 26, and 27).**

**Table 25. K=1 rated VCP-W breaker weights<sup>①</sup>.**

Rating	Amperes	Lbs. (kg)
15VCP-W 25 15VCP-WSE 25	1200	343 (156)
	2000	353 (160)
	3000	426 (193)
15VCP-W 40 15VCP-WSE 40	1200	353 (160)
	2000	353 (160)
	3000	426 (193)
15VCP-W 50 15VCP-WSE 50	1200	374 (170)
	2000	374 (170)
	3000	426 (193)
150VCP-W 63	1200	460 (209)
	2000	490 (222)
	3000	525 (238)
8VCP-W 40 8VCP-WSE 40	1200	353 (160)
	2000	353 (160)
	3000	426 (193)
8VCP-W 50 8VCP-WSE 50	1200	374 (170)
	2000	374 (170)
	3000	426 (193)
5VCP-W 25 5VCP-WSE 25	1200	343 (156)
	2000	353 (160)
	3000	426 (193)
5VCP-W 40 5VCP-WSE 40	1200	353 (160)
	2000	353 (160)
	3000	426 (193)
5VCP-W 50 5VCP-W 50SE	1200	374 (170)
	2000	374 (170)
	3000	426 (193)
50VCP-W 63	1200	460 (209)
	2000	490 (222)
	3000	525 (238)
270VCP-W16	600	460 (209)
	1200	480 (218)
	2000	500 (227)
270VCP-W22	600	460 (209)
	1200	480 (218)
	2000	500 (227)
270VCP-W25	600	460 (209)
	1200	480 (218)
	2000	500 (227)
270VCP-W32	1200	545 (245)
	2000	560 (252)
270VCP-W40	1200	545 (245)
		560 (252)

<sup>①</sup> Does not include shipping carton.

**Table 26. MVA Rated VCP-W breaker weights<sup>Ⓢ</sup>.**

Rating	Amperes	Lbs. (kg)
50VCPW-ND250	1200	345 (157)
5VCP-W250 5VCPW-SE250	1200	353 (160)
	2000	353 (160)
	3000	426 (193)
5VCP-W350 5VCPW-SE350	1200	374 (170)
	2000	374 (170)
	3000	426 (193)
8VCP-W500 8VCPW-SE500	1200	353 (160)
	2000	353 (160)
	3000	426 (193)
15VCP-W500 15VCPW-SE500	1200	343 (156)
	2000	353 (160)
	3000	426 (193)
15VCP-W750 15VCPW-SE750	1200	353 (160)
	2000	353 (160)
	3000	426 (193)
15VCP-W1000 15VCPW-SE1000	1200	374 (170)
	2000	374 (170)
	3000	426 (193)
270VCP-W750	600	460 (209)
	1200	480 (218)
	2000	500 (227)
270 VCP-W1000	600	460 (209)
	1200	480 (218)
	2000	500 (227)
270 VCP-W1250	600	460 (209)
	1200	480 (218)
	2000	500 (227)
270 VCP-W1600	1200	545 (245)
	2000	560 (252)
270VCP-W2000	1200	545 (245)
	2000	560 (252)

Ⓢ Does not include shipping carton.

**Table 27. VCP-W IEC rated breaker weights<sup>Ⓢ</sup>.**


Rating	Nominal current amperes	Lbs. (kg)
36VCPW-ND25	630	350 (159)
	1250	350 (159)
36VCPW-ND32	630	350 (159)
	1250	350 (159)
72VCPW-ND25	630	350 (159)
	1250	350 (159)
72VCPW-ND32	630	350 (159)
	1250	350 (159)
36VCP-W25	630	350 (159)
	1250	350 (159)
	2000	410 (186)
36VCP-W32	1250	350 (159)
	2000	410 (186)
36VCP-W40	1250	375 (170)
	2000	410 (186)
72VCP-W25	630	350 (159)
	1250	350 (159)
	2000	410 (186)
72VCP-W32	1250	350 (159)
	2000	410 (186)
72VCP-W40	1250	375 (170)
	2000	410 (186)
120VCP-W25	630	350 (159)
	1250	350 (159)
	2000	410 (186)
120VCP-W32	1250	350 (159)
	2000	410 (186)
120VCP-W40	1250	375 (170)
	2000	410 (186)
175VCP-W25	630	350 (159)
	1250	350 (159)
	2000	410 (186)
175VCP-W32	1250	375 (170)
	2000	410 (186)
175VCP-W40	1250	375 (170)
	2000	410 (186)
240 VCP-W16	630	462 (210)
	1250	484 (220)
	2000	506 (230)
240 VCP-W20	630	462 (210)
	1250	484 (220)
	2000	506 (230)
40 VCP-W25	630	462 (210)
	1250	484 (220)
	2000	506 (230)

Ⓢ Does not include shipping carton.







*Optional portable lifter*



*Optional accessories*




*Standard accessories*

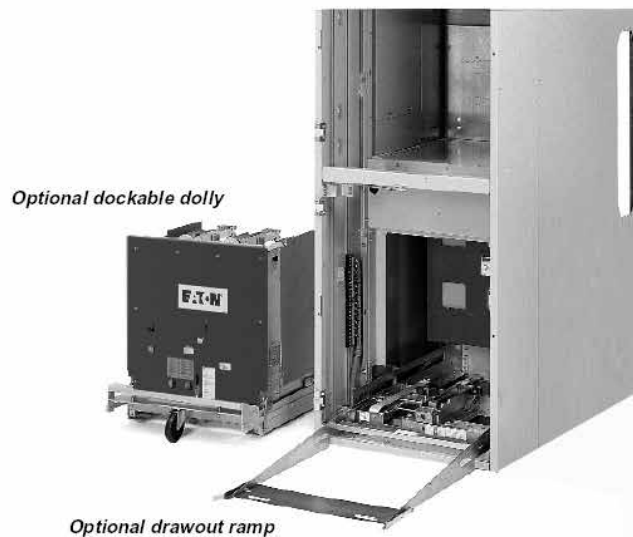

*Optional dockable dolly*


*Optional drawout ramp*

**Figure 4. Typical VCP-W tools and accessories. (Note: products shown for representation only. New products may include design improvements and alternate nameplate configurations.)**

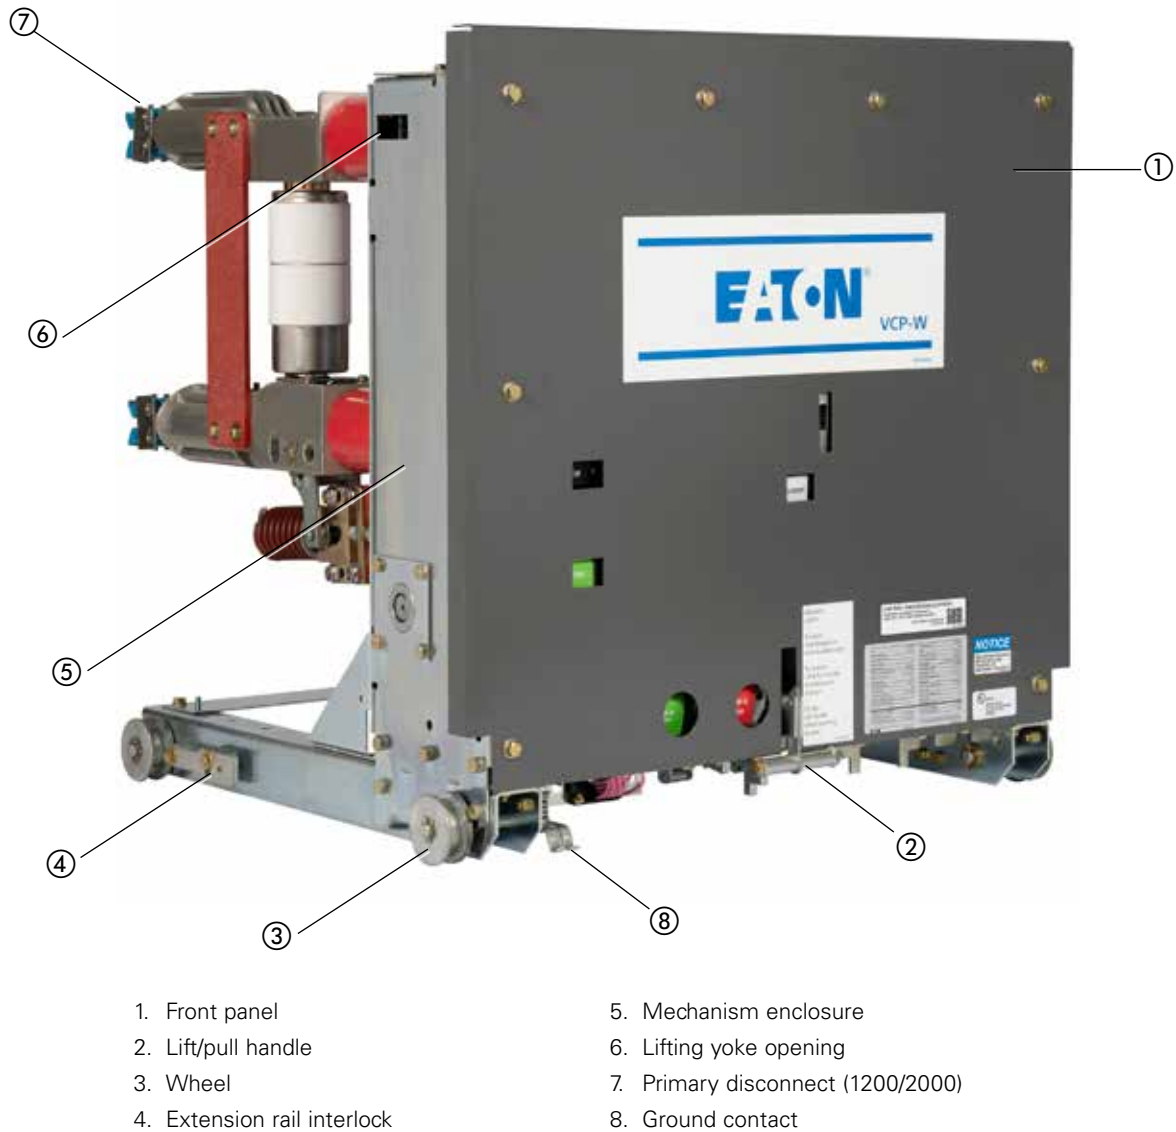


**Figure 5. Typical front view VCP-W vacuum circuit breaker. (See Figure 46 for an example of a roll on the floor wheel kit.)**

**Note:** Not all products depicted by picture.

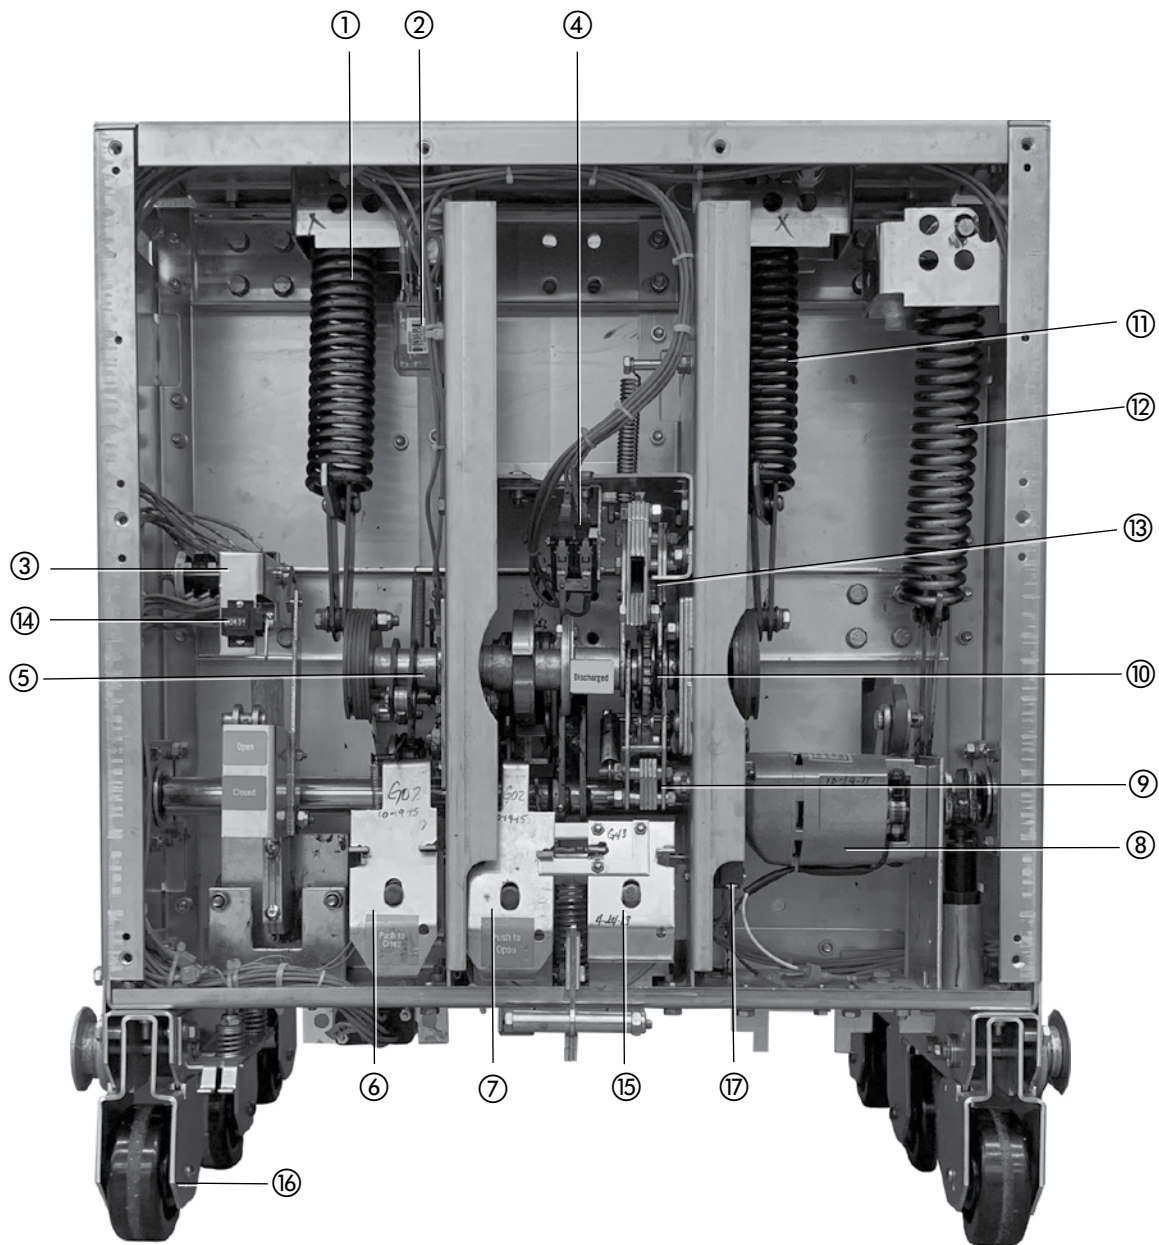


- |   |                          |                                   |
|---|--------------------------|-----------------------------------|
| 1. L.H. closing spring                  | 7. Shunt trip assembly   | 13. Manual charge socket          |
| 2. Anti-pump relay                      | 8. Charging motor        | 14. Operation counter             |
| 3. Auxiliary switch                     | 9. Charging pawl         | 15. Optional second shunt trip    |
| 4. Motor cutoff switch                  | 10. Ratchet wheel        | 16. Optional roll on floor wheels |
| 5. Closing cam                          | 11. R. H. closing spring | 17. Position switches             |
| 6. Spring release (close coil) assembly | 12. Opening spring       |                                   |

**Figure 6. Typical VCP-W vacuum circuit breaker with front cover removed.**

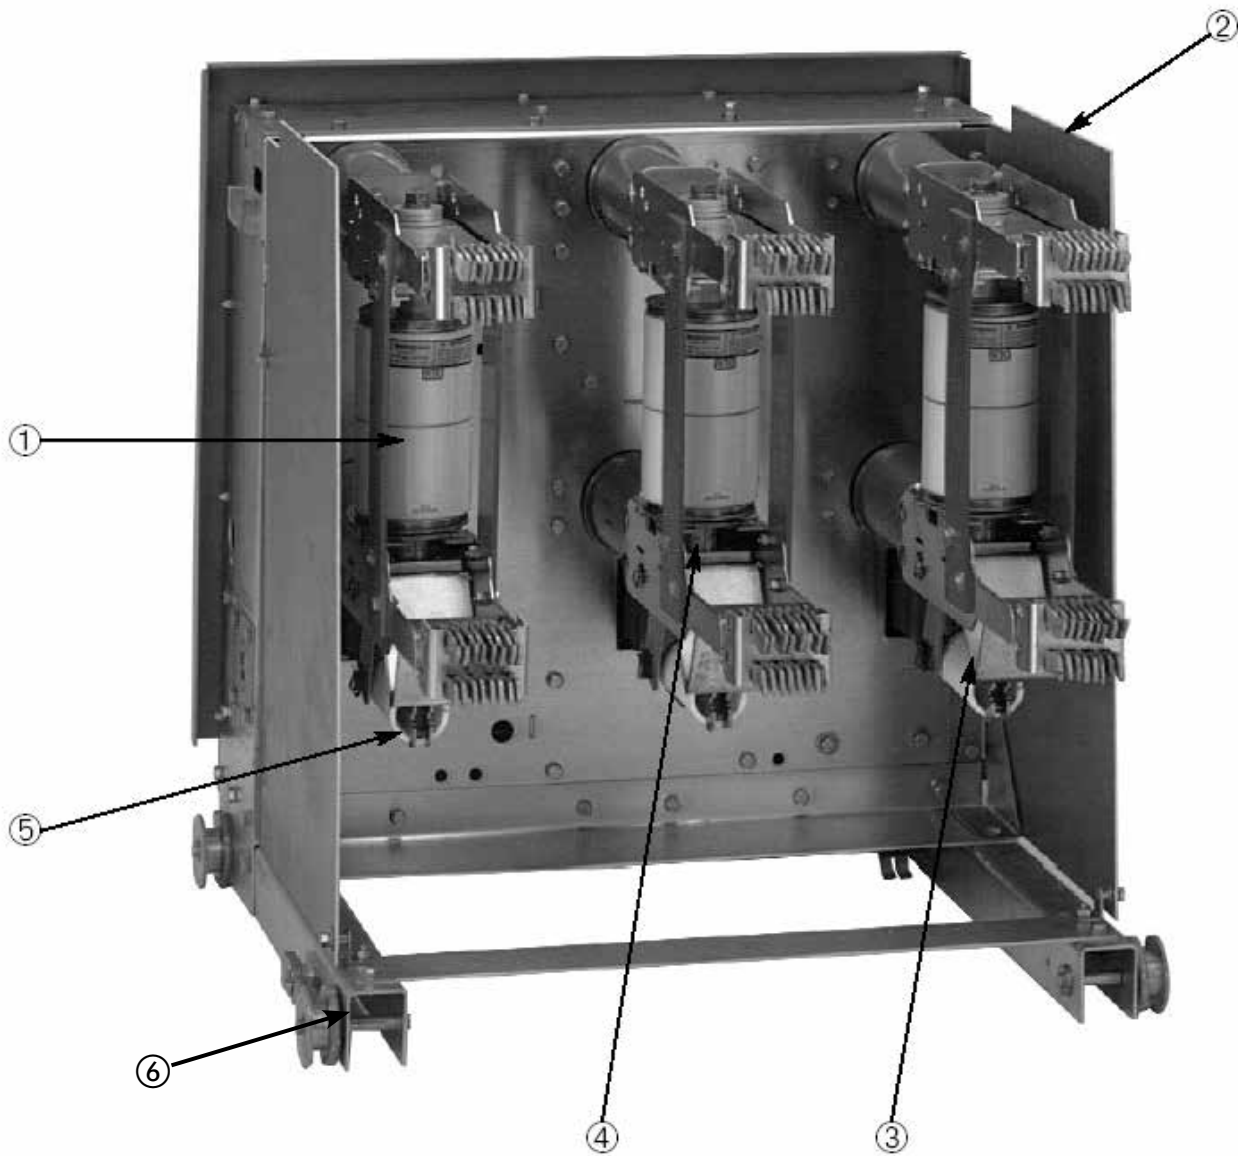

1. Vacuum interrupter
2. Phase barrier
3. V-flex current transfer system
4. Direct reading contact erosion indicator
5. Contact loading spring (wipe spring)
6. TOC operator (BPI pan assembly)

Figure 7. Typical rear view VCP-W 27 kV C-rated, IEC, and VCP-WXC.

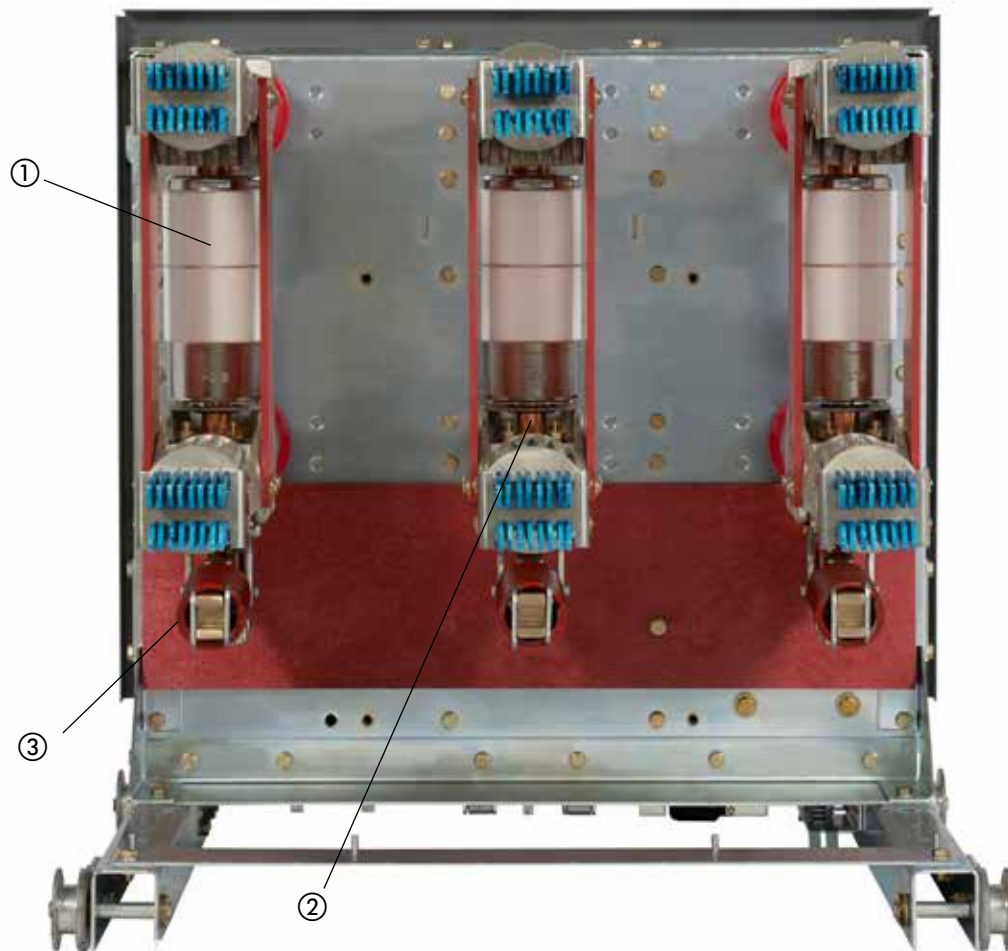

- 1. Vacuum interrupter
- 2. Direct reading contact erosion indicator
- 3. Contact loading spring (wipe spring)

**Figure 8. Typical rear view VCP-W, 5/15 kV, k=1, MVA enhanced pole unit shown.**



- |                           |   |
|---------------------------|---|
| 1. Front panel            | 6. Spring charge/discharge indicator                |
| 2. Nameplate              | 7. Manual open button                               |
| 3. Operation counter      | 8. Manual close button                              |
| 4. Open /closed indicator | 9. Catalog number label (Note: not on all breakers) |
| 5. Manual charge socket   |   |

**Figure 9. Typical VCP-W vacuum circuit breaker front cover arrangement.**

## 4. Initial inspection and installation

### 4.1 Introduction

---

#### **⚠ WARNING**

**BEFORE PLACING THE CIRCUIT BREAKER IN SERVICE, CAREFULLY FOLLOW THE INSTALLATION PROCEDURE GIVEN BELOW. NOT FOLLOWING THE PROCEDURE CAN FAIL TO UNCOVER SHIPPING DAMAGE THAT MAY RESULT IN INCORRECT CIRCUIT BREAKER OPERATION LEADING TO DEATH, BODILY INJURY, AND EQUIPMENT DAMAGE.**

---

Before attempting to put a circuit breaker in service, it should be carefully examined and operated manually and electrically. In addition, carefully examine the breaker for loose or obviously damaged parts. The following information is a guide for performing recommended checks and tests.

### 4.2 Manual operation check

Refer to Figures 10 and 11 and then proceed by placing the maintenance tool into the manual charge socket opening. Charge the closing springs with about 28 to 38 up and down strokes of the handle. When charging is complete, the closing crank goes over center with an audible CLICK and the springs Charged/Discharged indicator shows "Charged."

---

#### **NOTICE**

**IF THE SPRINGS ARE TO BE CHARGED ON A CLOSED CIRCUIT BREAKER, NO CLICK IS HEARD AT THE END OF CHARGING OPERATION. DISCONTINUE CHARGING AND REMOVE THE MAINTENANCE TOOL AS SOON AS "CHARGED" FLAG IS FULLY VISIBLE. CONTINUED ATTEMPTS TO CHARGE FURTHER MAY RESULT IN DAMAGE TO THE MECHANISM.**

---

Remove the maintenance tool. Close and trip the circuit breaker. Repeat several times.

### 4.3 Vacuum interrupter integrity

Using a dry, lint free cloth or paper towel, clean all the accessible insulating surfaces of the pole units. Conduct a vacuum interrupter integrity check as described in Section 6.

### 4.4 Insulation

Check the circuit breaker's primary and secondary insulation as described in Section 6.

### 4.5 Contact erosion and wipe

Manually charge the closing springs and close the circuit breaker. Check contact erosion and wipe as described in Section 6.

### 4.6 Primary circuit resistance

Check the primary circuit resistance as described in Section 6. The resistance should not exceed the values specified. Record the values obtained for future reference.

### 4.7 Nameplate

Compare the circuit breaker nameplate information with switchgear drawings for compatibility.



Figure 10. Type VCP-W circuit breaker manual charging handle in use.

### 4.8 Electrical operation check

After having completed all previous checks and tests, the circuit breaker is ready to be operated electrically. It is preferred that this check be made with the circuit breaker in a TEST position or by using a test cable, if the circuit breaker is outside the cell structure.

---

#### **⚠ CAUTION**

**BEFORE INSERTING THE CIRCUIT BREAKER, EXAMINE THE INSIDE OF THE CELL STRUCTURE FOR EXCESSIVE DIRT OR ANYTHING THAT MIGHT INTERFERE WITH THE CIRCUIT BREAKER MOVEMENT.**

---

---

#### **⚠ WARNING**

**EXTREME CAUTION MUST BE EXERCISED TO INSURE THAT PRIMARY CIRCUITS ARE NOT ENERGIZED WHILE CHECKS ARE PERFORMED IN THE CIRCUIT BREAKER COMPARTMENT. FAILURE TO DO SO MAY RESULT IN PERSONAL INJURY OR DEATH.**

---

The circuit breaker is normally tested electrically in its cell structure in the TEST position. To achieve the TEST position, first determine if the breaker cell has a BPI Pan Assembly, Figure 13 or a non-BPI Pan Assembly, Figure 14. Then follow the appropriate instructions in section 4.8.1 to move/lever the circuit breaker into the TEST position.

#### 4.8.1 Circuit breaker insertion and removal

---

#### **⚠ CAUTION**

**DO NOT USE ANY TOOL OTHER THAN THE LEVERING-IN CRANK PROVIDED TO LEVER THE CIRCUIT BREAKER FROM TEST OR CONNECTED POSITIONS. CORRECT OPERATION OF SOME OF THE INTERLOCKS IS DEPENDENT ON USE OF THE PROVIDED LEVERING-IN CRANK. PERSONAL INJURY OR EQUIPMENT DAMAGE COULD RESULT FROM THE USE OF A TOOL OTHER THAN THE PROPER LEVERING-IN CRANK.**


---

## NOTICE

**THE CIRCUIT BREAKER AND INTEGRAL LEVERING MECHANISM INCLUDES ALL NECESSARY INTERLOCKS THAT, WHEN INTERFACED WITH A COMPATIBLE STRUCTURE, WILL RENDER THE CIRCUIT BREAKER MECHANISM MECHANICALLY AND ELECTRICALLY TRIP-FREE DURING THE LEVERING PROCESS. FOR INFORMATION PERTAINING TO INDIVIDUAL INTERLOCKS, REFER TO PARAGRAPH 4.9 IN THIS SECTION.**

### Inserting breaker:

- A. **Lower compartment direct roll-in-breaker**  
Push the breaker into the breaker compartment until the breaker "T" handle latches over the moving block on the levering screw assembly. In this position, the breaker is considered in the DISCONNECT position.
- B. **Upper compartment or non-direct roll-in-breaker**
  1. The breaker compartment has an interlock assembly on the compartment levering assembly, located on both the left and right hand rail assemblies. The purpose of the interlock assembly is to prevent the breaker from being removed from the compartment without the extension rails in place.
  2. In order to insert or remove a non-direct roll-in breaker, a set of extension rails must be inserted into the left hand and right hand rail assemblies. This is achieved by inserting the appropriate rail, identified with a label, diagonally into the slot such that the extension rail, when lowered, unlocks the interlock allowing an installed circuit breaker to roll forward. The rolling surfaces of the compartment rail and extension rail are flush.
  3. In this position, the breaker can be inserted or removed from the breaker compartment (see Figures 11 and 12).

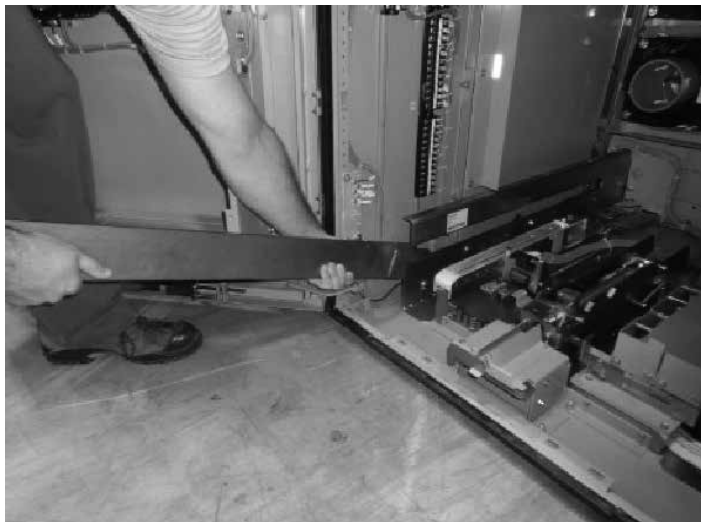

**Figure 11. Insertion of the drawout extension rails.**

## Instructions for installation, operation, and maintenance of type VCP-W vacuum circuit breakers



**Figure 12. Lifting and setting the breaker in the housing.**

### Checking pan operation:

#### A. TEST or DISCONNECT/TEST position

To operate the breaker at this time (TEST position mode), it is necessary to connect the secondary harness with the breaker.

**Automatic secondary:** For an automatically engaged secondary harness, lever the breaker into the TEST position identified by the breaker position indication (BPI) label.

**Manual secondary:** For a manually engaged secondary harness, pull the secondary plug handle forward until the secondary receptacle, located on the compartment levering pan, fully mates with the secondary breaker wiring plug.

**Note:** It is recommended that the power to the secondary connector be de-energized prior to manually engaging the secondaries to prevent damage to the secondary pins associated with the spring charging motor circuit.

**Note:** To prevent damage never rely on racking to engage secondary on a manually engaged secondary.

In these positions, the breaker control circuit can be tested offline (breaker is not connected to the primary circuit).

#### B. Racking the breaker to the CONNECTED position

1. Movement of the breaker from the TEST or DISCONNECT/TEST position to the CONNECTED position.
  - a. The breaker will trip as the levering-in crank is pushed in to gain access to the hex drive nut on the levering system.
  - b. Rotate the levering-in crank in a clockwise direction until the torque limiter on the levering-in crank "breaks free." As a position verification;
    - BPI pan assembly: the breaker cover plate MUST align with the black line associated with the CONNECTED position, location shown on the BPI label (Figure 13 item 7).
    - Non-BPI pan assembly: the red indicator on the levering system as shown through the window below the levering-in crank on the front of the levering system (Figure 14, item 7).



C. Racking the breaker from CONNECTED position to TEST or DISCONNECT/TEST position

**BPI pan assembly:**

1. Insert the levering-in crank onto the hex drive nut on the levering system. In order to engage the hex drive nut, you must push in the levering system slider.

**Note:** If the breaker is closed, it will trip as the levering-in crank is pushed in to gain access to the hex drive nut in the levering system.

2. Rotate the levering-in crank in a counterclockwise direction until the breaker is in the TEST or the DISCONNECT position.

**Note:** The breaker secondary control receptacle on the compartment levering system is automatically disengaged from the breaker secondary plug when moved to the DISCONNECT position.

**Non-BPI pan assembly:**

1. If the breaker is closed in the CONNECTED position, then access to the hex drive nut on the levering system will be denied. The breaker must be opened prior to levering operation being performed.

2. Insert the levering-in crank onto the hex drive nut on the levering system. In order to engage the hex drive nut, you must push in the levering system slider.
3. Rotate the levering-in crank in a counterclockwise direction until the breaker is in the DISCONNECT/TEST position.

**Note:** The breaker secondary control receptacle on the compartment levering system is automatically disengaged from the breaker secondary plug when moved to the DISCONNECT/TEST position.

**Automatic/manual hybrid BPI pan assembly:**

1. If the breaker is closed in the CONNECTED position, then access to the hex drive nut on the levering system will be denied. The breaker must be opened prior to levering operation being performed.
2. Insert the levering-in crank onto the hex drive nut on the levering system. In order to engage the hex drive nut, you must push in the levering system slider.
3. Rotate the levering-in crank in a counterclockwise direction until the breaker is in the DISCONNECT/TEST position.

**Note:** The breaker secondary control receptacle on the compartment levering system is automatically disengaged from the breaker secondary plug when moved to the DISCONNECT/TEST position.

**Note:** The legend for Figures 13 and 14 follow Figure 14.



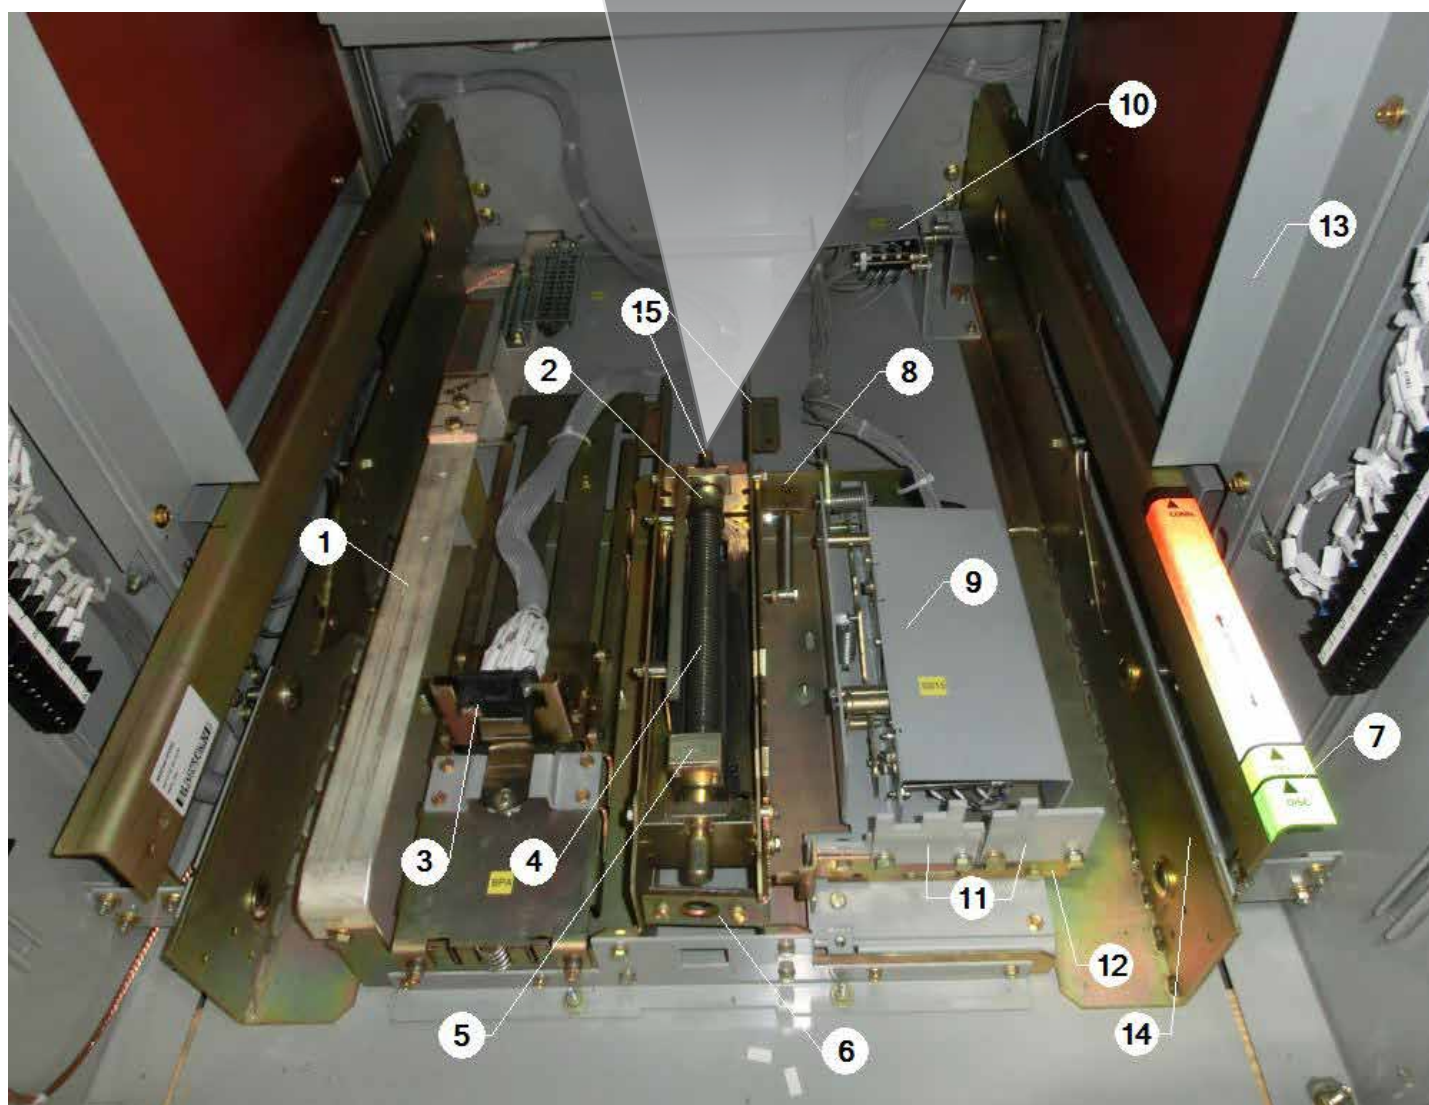


Figure 13. BPI pan assembly.

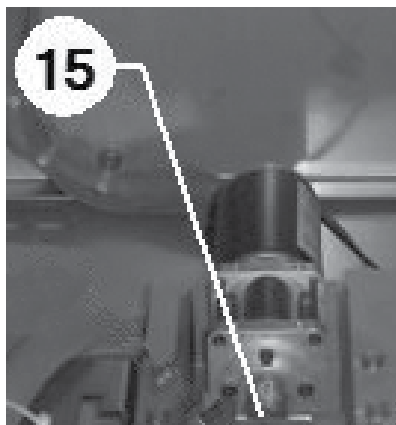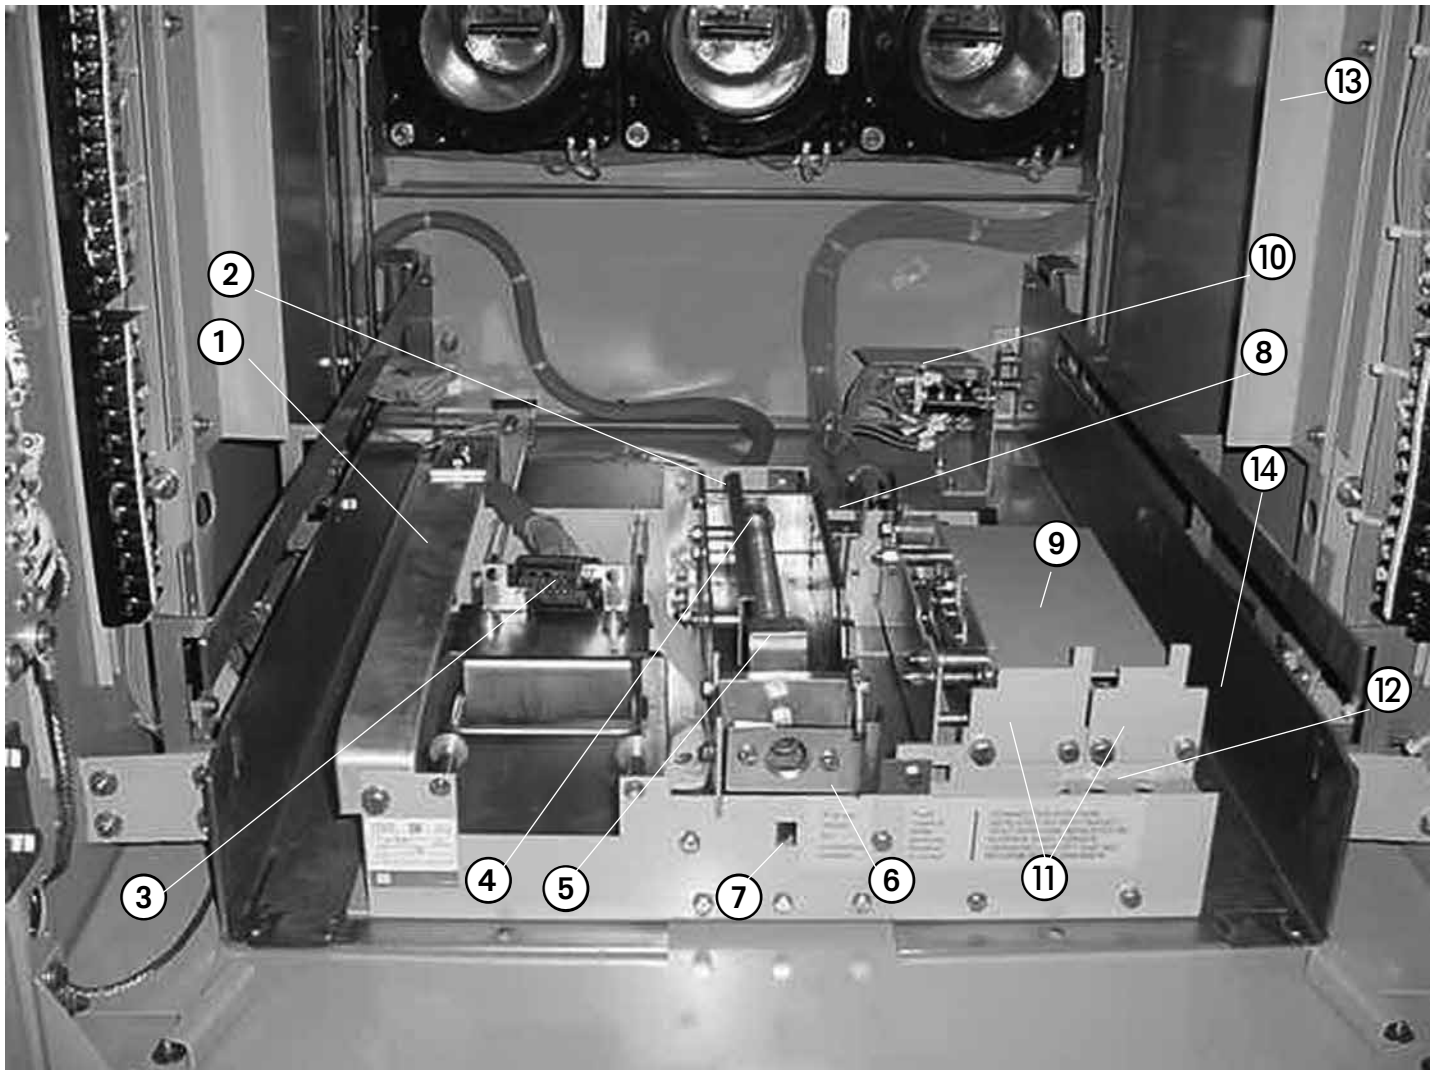

Legends for Figures 14 & 15.

- |  |  |
|--|--|
| 1. Ground contacts                               | 9. MOC switch                                  |
| 2. Levering system.                              | 10. TOC switch                                 |
| 3. Automatic (BPI) or manual (non-BPI) secondary | 11. Coding plates                              |
| 4. Racking screw                                 | 12. Provision for padlocking                   |
| 5. Moving block                                  | 13. Picture frame                              |
| 6. Slider  | 14. Breaker rail                               |
| 7. Breaker position indication                   | 15. MR2 integral racking provisions (optional) |
| 8. Slider interlocks                             |  |

**Figure 14. Non-BPI pan assembly.**

**Breaker pan assembly:**

Call out descriptions for Figure 13 and 14.

1. Grounding contact grounds the breaker in the DISCONNECT, TEST, and CONNECTED positions.
2. The levering system prevents removal of the breaker in any position other than the DISCONNECT position (BPI pan) or DISCONNECT/TEST position (non-BPI pan).
3. The control wiring is arranged for pullout disconnecting by means of a 25-point female receptacle arranged to connect to a male plug on the breaker. The secondary disconnect is the connection for the control leads between the removable breaker and the stationary housing.

**Automatic secondary:** Figure 13 represents an automatically engaged secondary, as offered on the BPI pan assembly, requires no manual input from the customer to engage the secondary harness. The secondary harness will engage automatically when the breaker is levered-in to the discrete TEST position.

The secondary harness will then disengage automatically when the breaker returns to the DISCONNECT position.

**Manual secondary:** Figure 14 represents a manually engaged secondary assembly which requires the customer to engage the secondary harness manually when the breaker is in the DISCONNECT position. When engaged, the breaker will now be in the TEST position.

**Automatic/manual hybrid secondary (optional):** Figure 47 represents an automatic engaging secondary with a manual release feature incorporated into the BPI pan assembly. It requires the customer to manually lift up the secondary release lever to allow the secondary harness to engage the breaker in the DISCONNECT/TEST position.

The secondary harness will then disengage automatically when the breaker returns to the DISCONNECT/TEST position.

4. Racking screw performs breaker insertion and withdrawal.
5. Moving block couples to breaker for insertion and withdrawal.
6. Slider is used with #8 to prevent levering a closed breaker. May also be used in conjunction with #12 to padlock a breaker in either position.
7. Indicates when the breaker is in the fully connected position.

**Breaker position indication (BPI) label:** Figure 13 represents positive indication of breaker location at any position through use of a colored label mounted on the top flange of the right hand rail assembly. Green indicates the DISCONNECT position, yellow indicates the TEST position, and red indicates the CONNECT position. Upon arriving at any of the three discrete positions; DISCONNECT, TEST, and CONNECT, there is a black mark that aligns with the breaker cover to indicate exact location.

**Standard indication:** Figure 14 represents positive indication of the breaker in the CONNECT position by use of a red flag that rotates into viewing position when the breaker is fully connected.

8. **Slider interlocks:**

**BPI pan assembly:** Figure 13 displays the "L" shaped slider interlock that enables tripping of a closed breaker by pushing in on the slider (item 6) that prevents access to the racking screw.

**Non-BPI pan assembly:** Figure 14 displays the "Z" shaped slider interlock that prevents a closed breaker from being levered out of the cell.

9. The breaker mechanism-operated cell (MOC) switch is an assembly of switches that is operated by a lever on the breaker mechanism. It can contain as many as 15 normally closed and 15 normally open contacts (beneath the cover) in the standard design.  
The MOC switch is activated by the breaker closing. It extends a plunger out the bottom of the mechanism and pushes down on the MOC switch operating mechanism. This, in turn, transmits the motion to operate the switch.
10. The truck operated cell (TOC) switch has nine poles - four normally open and five normally closed contacts that change state as the breaker is levered to the connected position. As the breaker is being levered into the connected position, a bracket on the breaker pushes the TOC switch lever during the last inch of travel. As a result, the TOC switch can be used to electrically indicate whether or not the breaker is in the connected position (beneath cover).
11. Code plates: (see Interface interlocks/interfaces check, Section 4.9.1).
12. Provision for padlocking a breaker in any position. Also a location for a key interlock.
13. Picture frame provides a closed barrier to the primary compartment when the breaker is connected.
14. Rail on which the breaker rolls.
15. Optional MR2 integral racking provisions for inclusion during manufacturing or aftermarket.

For additional information on the levering mechanism, refer to paragraph 5.6 in this manual.

**4.8.2 Circuit breaker performance check**

1. Study and understand the electrical drawings furnished with each switchgear system.
2. Install the circuit breaker in the DISCONNECT position.
3. Engage secondaries or lever breaker to TEST position to automatically engage secondaries:

**Automatic secondary:** To engage secondary harness, lever the breaker to the TEST position to engage the control circuit.

**Manual secondary:** To engage secondary harness, lift and pull the secondary disconnect forward to engage the control circuit.

**Note:** It is recommended that the power to the secondary connector be de-energized prior to manually engaging the secondaries to prevent damage to the secondary pins associated with the spring charging motor circuit.


**Automatic/manual hybrid secondary (optional):** To engage secondary harness, lift and release the secondary disconnect so that it automatically slides forward to engage the control circuit.

4. Verify breaker operation; once the secondaries are engaged the closing springs will automatically charge unless inhibited by the switchgear control circuit, the condition will be indicated by a Spring Charged/Discharged indicator on the front of the circuit breaker (Figure 9). In addition, the status of the main contacts, open or closed, is indicated on the front of the circuit breaker.

Close and trip the circuit breaker several times to verify closing and tripping operations. Conclude by closing the circuit breaker. The circuit breaker is now closed in the TEST position with springs charged.



**Figure 15. Engaging extension rails in a lower circuit breaker compartment.**

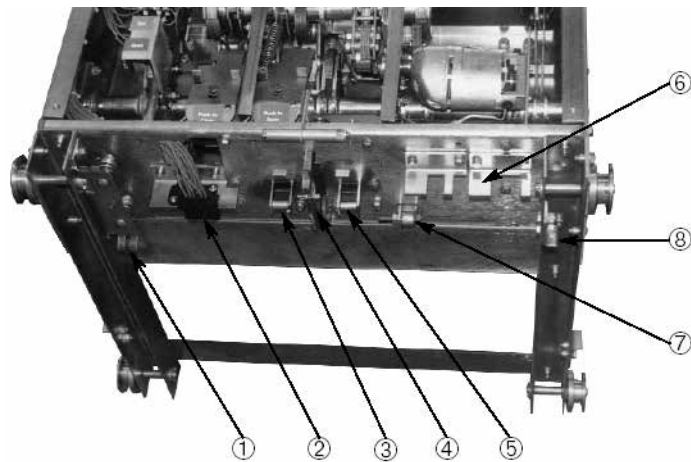

1. Ground contact
2. Secondary disconnect
3. Close floor tripper
4. Levering latch
5. Trip floor tripper
6. Code plates
7. MOC operator
8. TOC operator (Non-BPI pan assembly)

**Figure 16. Typical VCP-W circuit breaker bottom view.**

#### 4.9 Circuit breaker/structure interfacing

##### **⚠ WARNING**

**NEVER DISABLE OR DEFEAT ANY INTERLOCKS. THEY ARE INTENDED FOR PROPER AND SAFE OPERATION. FAILURE TO COMPLY COULD RESULT IN DEATH, SEVERE PERSONAL INJURY, AND/OR PROPERTY DAMAGE DUE TO THE HAZARDOUS VOLTAGE PRESENT.**

Type VCP-W circuit breakers are supplied with a series of interlocks to insure safe and proper interfacing between the circuit breaker and its compartment. Specific interlocks are described in the next paragraph to provide proper familiarization. An interfacing check should be performed as also described in the next paragraph.

##### 4.9.1 Interface interlocks/interfacing check

Refer to Figures 11, 13, and 18 for visual interlock and interface check references. The following interlocks are provided to ensure safe and proper operation.

##### *Code plates*

A coding plate is fastened to the bottom front edge of the breaker compartment. There is also a coding plate fastened to the front of the breaker. If the breaker has a lower interrupting rating than the rating of the compartment, or if the voltage and continuous current characteristics do not match, the coding plate on the compartment will prevent the entrance of the breaker into the compartment. In general, per the IEEE standards, a higher rated breaker is always permitted to be inserted into a lower rated cell; however, there are certain physical characteristics of the breakers that may still prevent this from happening.

##### **NOTICE**

**EVEN WITH THE CODING PLATES, IT IS POSSIBLE TO PUT A BREAKER INTO THE COMPARTMENT THAT'S CONTROL WIRING IS NOT COORDINATED WITH THAT OF THE COMPARTMENT. ALWAYS CHECK THE SHOP ORDER DRAWING TO MAKE SURE THE CONTROL WIRING OF THE BREAKER AND THE COMPARTMENT ARE THE SAME.**

##### *Maintenance interlock*

This interlock trips, closes, and trips the circuit breaker if it is closed and charged as the circuit breaker is withdrawn from the DISCONNECT (BPI pan assembly) or DISCONNECT/TEST position on to the extension rails or rolled out of the cell for the direct roll-in-breaker. The circuit breaker open and closing springs are, therefore, discharged. A closed breaker cannot be moved into the DISCONNECT (BPI pan assembly) or DISCONNECT/TEST position from the extension rails, or from the floor as a roll-on-floor breaker. This interlock consists of the interaction between the switchgear cell features and the close floor tripper and the trip floor tripper found under the breaker per Figure 16.



**Figure 17. Pulling secondary disconnect cage to engage secondaries in TEST position (old version shown). New version will have BPI pan with automatic secondaries.**



**Figure 18. Engaging levering-in crank.**

#### Levering interlock

If the breaker is closed in the TEST position, then as the levering-in crank is pushed in to gain access to the hex drive nut on the levering system the breaker will trip Open automatically.

If the circuit breaker is closed as the levering-in crank is engaged to move the circuit breaker from the CONNECTED to the TEST position, the circuit breaker will do one of the following.

1. **BPI pan assembly (Figure 13):** If the breaker is closed in the CONNECTED position, then as levering-in crank is pushed in to gain access to the hex drive nut on the levering system the breaker will trip Open automatically.
2. **Non-BPI pan assembly (Figure 14):** If the breaker is closed in the CONNECTED position, then access to the hex drive nut on the levering system will be denied when pushing in the levering-in crank. The breaker must be opened prior to the levering operation being performed.

**Automatic/manual hybrid secondary (optional - Figure 47):** It will function the same as the Non-BPI pan assembly above.

#### Positive Interlock

**BPI pan assembly (Figure 13):** The "L" shaped slider interlock that enables tripping of a closed breaker by pushing in on the slider (item 6) that protects the racking screw. If desired, the customer can request the "Z" bracket to be added to the BPI pan assembly if the switchgear design permits it.

**Non-BPI pan assembly (Figure 14):** The "Z" shaped slider interlock that prevents a closed breaker from being levered out of the cell.

**Automatic/manual hybrid secondary (optional - Figure 47):** It will function the same as the Non-BPI pan assembly above due to the replacement of the "L" bracket with the "Z" bracket.

#### Negative interlock

The negative interlock prevents the circuit breaker from closing between the CONNECTED and TEST positions.

#### Position closing interlock

The circuit breaker is prevented from closing automatically when it is moved from the TEST to the CONNECTED position if the closing switch is maintained during the levering-in operation.

#### Position withdrawal interlock

This interlock prevents the circuit breaker from being withdrawn by pulling unless it is in the DISCONNECT or DISCONNECT/TEST position.

#### Extension rail interlock

The extension rail interlock prevents the circuit breaker from being withdrawn out of its compartment unless the extension rails or the breaker lifter are properly engaged to the fixed rails, or the lower cell is configured for a direct roll-in-breaker.

#### Overall system interlock check

The correct operation of provided interlocks should be confirmed. Keep in mind that an interfacing check is made with a compatible structure. As such, the instructions provided here may overlap with the instructions provided with the assembly. In any case, all provided interlocks should be confirmed. Review paragraph 4.8.1 before proceeding if additional instructions are needed on insertion and removal of a circuit breaker.

At the conclusion of the operations check as described in paragraph 4.8.2, the circuit breaker was closed in the TEST position with its springs charged. Perform one of the following depending on the slider interlock (also called positive interlock) style.

#### BPI pan assembly:

Engage the levering-in crank and the circuit breaker will automatically trip and the MOC switches will operate if the circuit breaker cell is equipped with MOC switches designed to operate in the TEST position.

Lever the circuit breaker towards the CONNECTED position. As the circuit breaker moves, protective compartment shutters will automatically begin to open uncovering fixed primary contacts.

TOC switches will also operate once the CONNECTED position is reached, if TOC switches are provided in the structure. Remove the levering-in crank at this point.

Close the circuit breaker. Any provided MOC switches will operate and the motor closing springs will charge if control power is available.

Engage the levering-in crank. The slider can be pushed in to engage the levering-in crank and the circuit breaker will automatically trip. Lever the circuit breaker out approximately halfway towards the TEST position.

Attempt to lift the circuit breaker lift/pull handle to pull the circuit breaker out. The position withdrawal interlock will prevent lifting the handle high enough to disengage the levering latch from the nut. This prevents the circuit breaker from being pulled out.

#### Non-BPI pan assembly:

Engage the levering-in crank and the circuit breaker will automatically trip and the MOC switches will operate if the circuit breaker cell is equipped with MOC switches designed to operate in the TEST position.

Lever the circuit breaker towards the CONNECTED position. As the circuit breaker moves, protective compartment shutters will automatically begin to open uncovering fixed primary contacts. TOC switches will also operate once the CONNECTED position is reached. TOC switches are provided in the structure. Remove the levering-in crank at this point, if equipped with this option.

Close the circuit breaker. Any provided MOC switches will operate and the motor closing springs will charge if control power is available.

Attempt to engage the levering crank. The slider cannot be pushed far enough to engage the levering-in crank. Trip the circuit breaker, engage the levering-in crank, and lever the circuit breaker out approximately halfway towards the DISCONNECT/TEST position.

Attempt to lift the circuit breaker lift/pull handle to pull the circuit breaker out. The position withdrawal interlock will prevent lifting the handle high enough to disengage the levering latch from the nut. This prevents the circuit breaker from being pulled out.

Attempt to close the circuit breaker by pushing the manual close button. The circuit breaker will go trip free (springs discharge but circuit breaker will not close). Lever the circuit breaker to the DISCONNECT/TEST position. The secondary contacts will disengage automatically.

#### BPI and non-BPI pan assembly:

If the extension rails are installed, then remove the extension rails. Disengage the levering latch by lifting the handle on the circuit breaker and attempt to pull the circuit breaker out. The circuit breaker will not move out more than two inches beyond the DISCONNECT or DISCONNECT/TEST position. Push the circuit breaker back to the DISCONNECT or DISCONNECT/TEST position. Engage the extension rails. Once again disengage the levering latch and pull the circuit breaker out. The circuit breaker will trip, close and trip as it comes out on to the extension rails from the DISCONNECT or DISCONNECT/TEST position.

#### Automatic/manual hybrid secondary (optional - Figure 47):

It will function the same as the Non-BPI pan assembly above due to the replacement of the "L" bracket with the "Z" bracket.

---

### NOTICE

**THE INTERFACE CHECKS OUTLINED IN THIS MANUAL AND THE MANUAL PROVIDED WITH THE ASSEMBLY STRUCTURE ARE INTENDED TO VERIFY SAFE AND PROPER OPERATION. IF OBSERVED CONDITIONS ARE NOT AS DESCRIBED, CONTACT EATON FOR ASSISTANCE.**

---

## 5. Description and operation

### 5.1 Introduction

Type VCP-W, VCPW-SE, VCP-WC, and VCPW-ND vacuum circuit breakers are horizontal drawout designs for use in metal-clad switchgear compartments. Most ratings can be stacked two high in a vertical section resulting in a considerable savings of floor space.

Vacuum interrupters are used with all circuit breakers to close and open the primary circuit. All VCP-W circuit breakers are operated by a front mounted spring type stored energy mechanism (Figure 6). The stored energy mechanism is normally charged by an electric motor, but can be charged manually with the manual maintenance tool. Since the same basic, front accessible mechanism is used for all VCP-W circuit breakers, a minimum investment in spare parts is required.

The primary insulation used with Type VCP-W circuit breakers is flame retardant and track resistant glass polyester except for the Type VCPW-SE circuit breaker. The VCPW-SE special environment circuit breaker design utilizes cycloaliphatic epoxy for its primary insulation. "Fast On" type secondary control terminations are used on Types VCP-W, VCP-WC, and VCPW-ND circuit breakers, while the Type VCPW-SE circuit breaker utilizes ring type secondary control terminations.

The rest of this section describes the overall operation of the VCP-W circuit breaker as well as the function and operation of all major sub-assemblies and/or parts. Keep in mind that VCP-W will be used throughout the text when referring to any one of the three types of circuit breakers, unless there is a specific difference between VCP-W, VCPW-SE, VCP-WC, and VCPW-ND.

### 5.2 Interrupter assembly

Vacuum interrupters are mounted vertically and supported from the fixed stem which is clamped or bolted to the top conductor. The current transfer system consists either of a series of plated, high conductivity copper leaf conductors that are pressed on the movable interrupter stem or a plated high conductivity copper shunt bolted to the movable interrupter stem. These designs provide current flow with low electrical and thermal resistance. Utilizing these non-sliding current transfer systems between the movable stem and the breaker main conductor eliminates the need for maintenance. Multiple finger, floating type primary disconnecting contacts at the ends of the top and bottom conductors provide a means for interfacing with the primary conductors mounted in the switchgear (Figure 19).

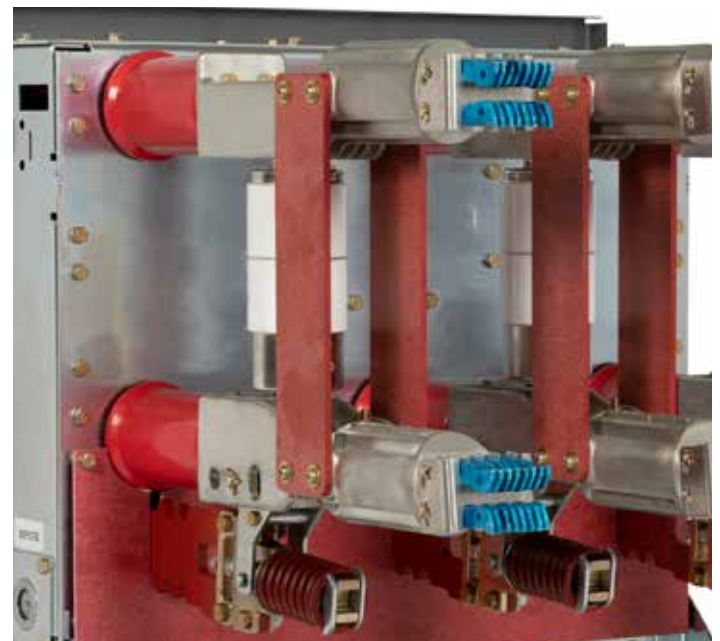


Figure 19. Typical VCP-W rear view showing vacuum interrupters and current carrying system.

Direct acting insulated operating rods in conjunction with the circuit breaker's mechanism provide a fixed amount of interrupter movable stem motion. This motion is directly related to the interrupter's "wipe" and "stroke," each of which is discussed in detail later in this section.

### 5.2.1 Vacuum interrupter

Type VCP-W vacuum circuit breakers utilize vacuum interrupters for interruption and switching functions. The vacuum interrupters use petal type copper chrome contacts for superior dielectric strength, better performance characteristics, and lower chop current. Vacuum interruption provides the advantages of enclosed interrupters, reduced size and weight, short interrupting time, long life, reduced maintenance, and environmental compatibility.

Arc interruption is simple and fast (Figure 18). In the closed position, current flows through the interrupter. When the contacts are opened, the arc is drawn between the contact surfaces. It is moved rapidly around the slotted contact surfaces by a self-induced magnetic force, which prevents gross contact erosion as well as the formation of hot spots on contact surfaces. The arc burns in an ionized metal vapor which continually leaves the contact area and condenses on the surrounding metal shield.

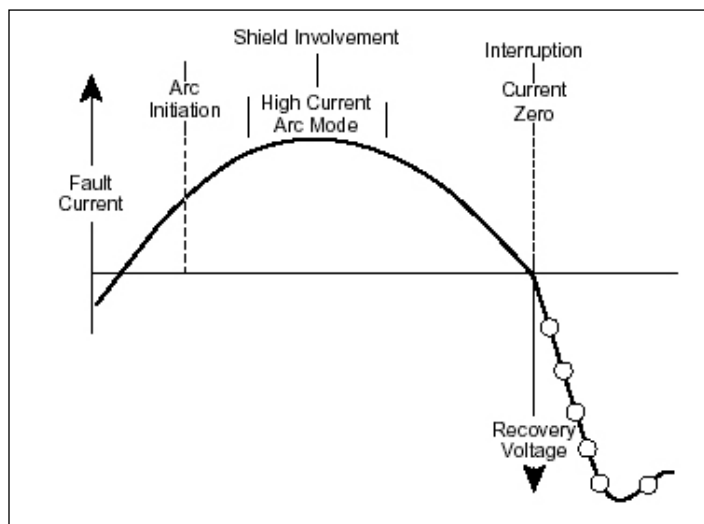


Figure 20. Graphic representation of arc interruption.

At current zero, the arc is extinguished and vapor production ceases. Very rapid dispersion, cooling, recombination, and deionization of the metal vapor plasma, together with the fast condensation of metal vapor products, cause the vacuum to be quickly restored. Hence, the opened contacts withstand the transient recovery voltage.

### 5.2.2 Contact erosion indication

The purpose of a contact erosion indicator is to monitor the erosion of the vacuum interrupter contacts, which is very minimal over time with vacuum interrupters utilizing copper-chrome contact material. If contact erosion reaches 1/8 in. (3.18 mm), the interrupter must be replaced. A horizontal contact erosion indicator mark is located on the moving stem of the interrupter (Figures 28 and 30).

In order to determine if the contacts have eroded to the extent that the interrupter must be replaced, observe the erosion mark placed on each moving stem from the rear of the breaker with the breaker closed. The interrupter is satisfactory if the mark on the stem is visible with the breaker closed. The vacuum interrupter must be replaced if the mark is no longer visible.

In order to determine if the contacts have eroded to the extent that the interrupter must be replaced, observe the erosion mark placed on each moving stem from the rear of the breaker with the breaker closed. The interrupter is satisfactory if the mark on the stem is visible with the breaker closed. The entire interrupter assembly must be replaced if the mark is no longer visible.

### 5.2.3 Loading spring indicator

The loading spring indicator on the breaker drive rods is an additional method provided to indicate conditions within the interrupter. The indicator is used to indicate whether the contact springs are maintaining the adequate contact pressure (wipe) to keep the contacts closed. Severe contact erosion would result in an unacceptable wipe indication from the indicator (Figure 30). Depending upon the structural design, a small mirror may be required to inspect all three poles.

Note that the actual drive rod design and appearance of the indicator can vary from one circuit breaker rating to another, but all designs are considered in Figure 30. When making this inspection, observe the color of the contact springs and the indication geometry and match to the corresponding images in Figure 30. Figure 30 illustrates what the actual indicator appearance will be for satisfactory wipe and unsatisfactory wipe.

### 5.2.4 Contact wipe and stroke

Contact wipe is the indication of (1) the force holding the vacuum interrupter contacts closed and (2) the energy available to hammer the contacts open with sufficient speed for interruption.

Stroke is the gap between fixed and moving contacts of a vacuum interrupter with the circuit breaker open.

The circuit breaker mechanism provides a fixed amount of motion to the operating rods. The first portion of the motion is used to close the contacts (i.e. stroke) and the remainder is used to further compress the pre-loaded wipe spring. This additional compression is called wipe. Wipe and stroke are thus related to each other. As the stroke increases due to the erosion of contacts, the wipe decreases.

The advanced design of all VCP-W vacuum circuit breakers eliminates the need for field adjustments of wipe or stroke. In the unlikely event wipe needs to be adjusted, the latest design of the 5, 8 and 15 VCP-W breakers extend breaker life by providing the ability to re-adjust wipe in the field. **REFERENCE INSTRUCTIONAL LEAFLET 81A7010H01 FOR INSTRUCTIONS FOR DRIVE ROD WIPE ADJUSTMENT FOR TYPE 5VCP-W, 8VCP-W, AND 15VCP-W BREAKERS.**

## ⚠ CAUTION

**EXCEPT FOR TYPE 5 VCP-W, 8 VCP-W, AND 15 VCP-W BREAKERS, THERE IS NO PROVISION FOR IN-SERVICE ADJUSTMENTS OF CONTACT WIPE AND STROKE. ALL SUCH ADJUSTMENTS ARE FACTORY SET AND SHOULD NOT BE ATTEMPTED IN THE FIELD.**

### 5.2.5 Phase barriers

Phase barriers on all VCP-W circuit breakers are made of glass polyester. Table 29 gives the number and configuration of the barriers required for each circuit breaker rating.



**Table 28. VCP-W & VCP-WC circuit breaker barrier configurations.**

ANSI breaker identification	Amps	Reference vacuum interrupter diameter inches	Number of barriers
50VCPW-ND250	1200	4	0
5VCP-W250	1200	4.2	0
	2000	4.2	0
	3000	5	0
5VCP-W350	1200	5	0
	2000	5	0
	3000	5	0
8VCP-W500	1200	4.2	0
	2000	4.2	0
	3000	5	0
15VCP-W500	1200	3.3	0
	2000	4.2	0
	3000	5	0
15VCP-W750	1200	4.2	0
	2000	4.2	0
	3000	5	0
15VCP-W1000	1200	5	0
	2000	5	0
	3000	5	0
150VCP-W63	1200	7	2 (INNER) 2 in cell
	2000	7	2 (INNER) 2 in cell
	3000	7	2 (INNER) 2 in cell
270VCP-W	630	4	2 (INNER) 2 in cell
	1200	4 or 5	2 (INNER) 2 in cell
	2000	5	2 (INNER) 2 in cell
50VCP-W25C	1200	4	2 (INNER) 2 in cell
	2000	5	2 (INNER) 2 in cell
	3000	7	2 (INNER) 2 in cell
150VCP-W25C	1200	4	2 (INNER) 2 in cell
	2000	5	4
	3000	7	2 (INNER) 2 in cell
50VCP-W40C 150VCP-W40C 50VCP-W50C 150VCP-W50C	1200	5	2 (INNER) 2 in cell
	2000	5	2 (INNER) 2 in cell
	3000	7	2 (INNER) 2 in cell
50VCP-W63C 150VCP-W63C	1200	7	2 (INNER) 2 in cell
	2000	7	2 (INNER) 2 in cell
	3000	7	2 (INNER) 2 in cell

**Note:** Although only standard ANSI rated VCP-W breakers are given in these configurations, all VCPW-SE and IEC rated breakers follow the same barrier configurations based on the diameter of the vacuum interrupter.

**VCP-W (K = 1) circuit breaker barrier configurations.**

ANSI breaker identification	Amps	Reference vacuum interrupter diameter inches	Number of barriers
5VCP-W25	1200	3.3	0
	2000	4.2	0
	3000	5	0
5VCP-W40	1200	4.2	0
	2000	4.2	0
	3000	5	0
5VCP-W50	1200	5	0
	2000	5	0
	3000	5	0

**VCP-W (K = 1) circuit breaker barrier configurations.**

ANSI breaker identification	Amps	Reference vacuum interrupter diameter inches	Number of barriers
50VCP-W63	1200	7	2 (INNER), 2 in cell
	2000	7	2 (INNER), 2 in cell
	3000	7	2 (INNER), 2 in cell
8VCP-W40	1200	4.2	0
	2000	4.2	0
	3000	5	0
8VCP-W50	1200	5	0
	2000	5	0
	3000	5	0
15VCP-W25	1200	3.3	0
	2000	4.2	0
	3000	5	0
15VCP-W40	1200	4.2	0
	2000	4.2	0
	3000	5	0
15VCP-W50	1200	5	0
	2000	5	0
	3000	5	0
150VCP-W63	1200	7	2 (INNER), 2 in cell
	2000	7	2 (INNER), 2 in cell
	3000	7	2 (INNER), 2 in cell

**⚠ WARNING**

**DO NOT PLACE THE CIRCUIT BREAKER IN ITS COMPARTMENT WITHOUT THE PHASE BARRIERS IN PLACE. THE ABSENCE OF THE BARRIERS COULD CAUSE A CATASTROPHIC FAILURE DURING INTERRUPTION OR OPERATION RESULTING IN DEATH, SEVERE PERSONAL INJURY, AND/OR PROPERTY DAMAGE.**

The multiple finger primary disconnect contacts are silver plated and waxed. In order to provide visual indication of the presence of wax, a blue dye is added during the waxing process to give a bluish color to the disconnect contacts. The wax acts as a conductive lubricant without attracting dirt. For this reason the contacts do not require any additional lubricant.

### 5.3 Stored energy mechanism

---

**⚠ WARNING**

---

**KEEP HANDS AND FINGERS AWAY FROM THE CIRCUIT BREAKER'S INTERNAL PARTS WHILE THE CIRCUIT BREAKER CONTACTS ARE CLOSED OR THE CLOSING SPRINGS ARE CHARGED. THE CIRCUIT BREAKER CONTACTS MAY OPEN OR THE CLOSING SPRINGS DISCHARGE CAUSING A CRUSHING INJURY. DISCHARGE THE SPRINGS AND OPEN THE CIRCUIT BREAKERS BEFORE PERFORMING ANY CIRCUIT BREAKER MAINTENANCE, INSPECTION, OR REPAIR.**


---

The spring stored energy operating mechanism is arranged vertically in front of all VCP-W circuit breakers (Figure 5). It includes all the elements for storing the energy, closing and tripping of the circuit breaker, as well as manual and electrical controls. The manual controls are all front accessible. Motion to close and open the interrupter contacts is provided through operating rods connecting the mechanism pole shaft to the bell cranks of the interrupter assemblies.


#### 5.3.1 Operation of stored energy mechanism

The mechanism stores the closing energy by charging the closing springs. The mechanism may rest in any one of the four positions shown in Figure 19 and as follows:


- a. Breaker element open, closing springs discharged;
- b. Breaker element open, closing springs charged;
- c. Breaker element closed, closing springs discharged; and
- d. Breaker element closed, closing springs charged.

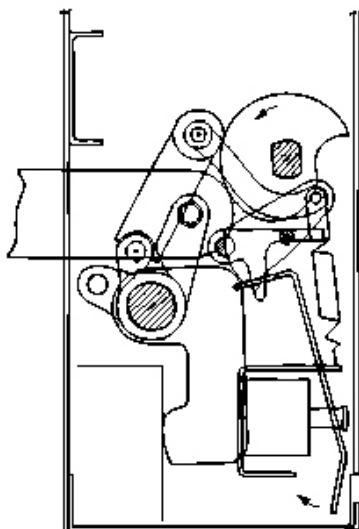


**Figure 20a** Breaker open  
and closing spring discharged

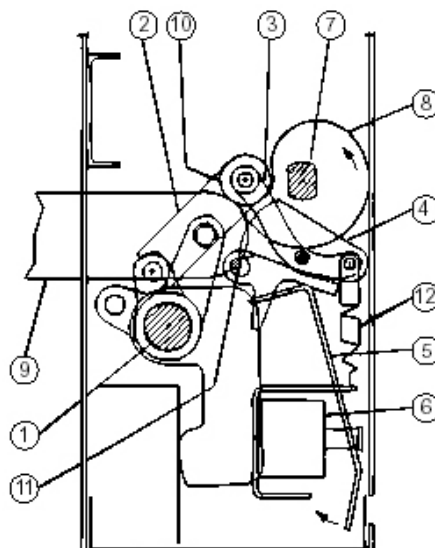

**Figure 20b** Breaker open  
and closing spring discharged

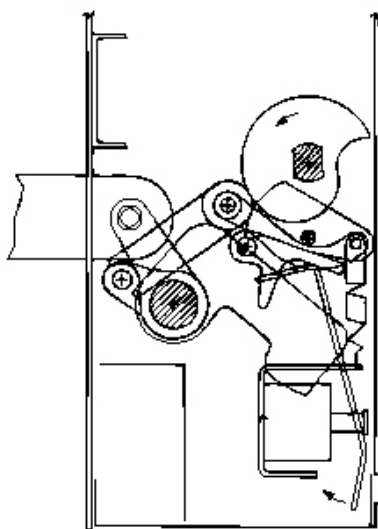


**Figure 20c** Breaker closed  
and closing spring discharged

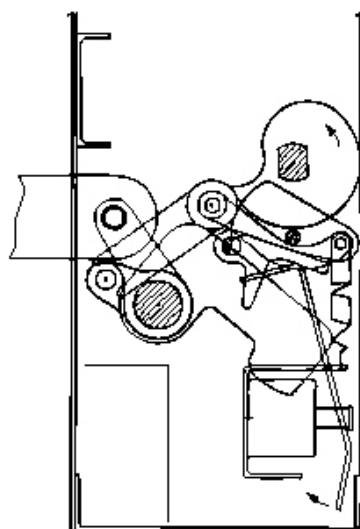


**Figure 20d** Breaker closed  
and closing spring discharged

- |                |                     |                             |
|----------------|---------------------|-----------------------------|
| 1. Pole shaft  | 5. Shunt trip lever | 9. Operating rod            |
| 2. Main link   | 6. Shunt trip coil  | 10. Main link roller        |
| 3. Banana link | 7. Cam shaft        | 11. Trip bar "D" shaft      |
| 4. Trip latch  | 8. Closing cam      | 12. Trip latch reset spring |

**Figure 21. Closing cam and trip linkage.**

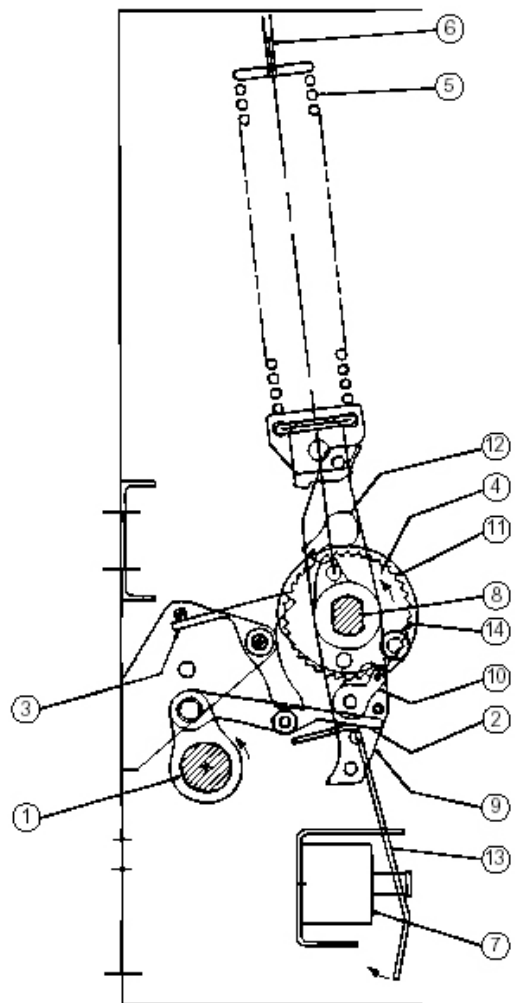

Breaker open, springs discharged

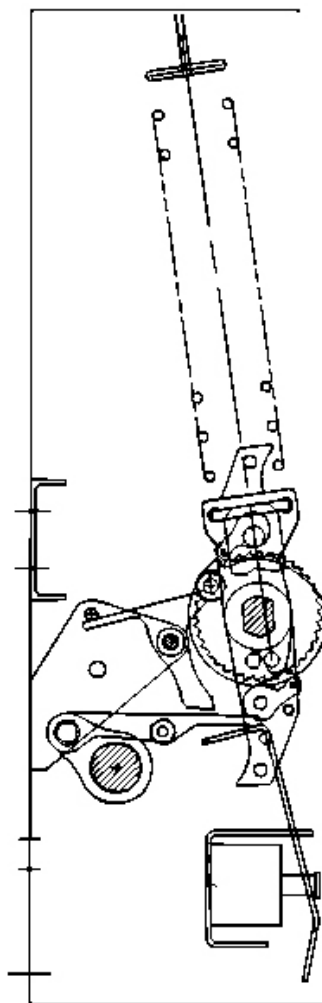

Breaker closed, springs discharged

- 1. Pole shaft
- 2. Anti-close interlock
- 3. Spring release (close) latch
- 4. Spring crank
- 5. Closing spring
- 6. Closing spring fixed end
- 7. Spring release (close) coil

- 8. Cam shaft
- 9. Motor ratchet lever
- 10. Drive pawl
- 11. Ratchet wheel
- 12. Holding pawl
- 13. Spring release (close) clapper
- 14. Spring release latch (close roller)

Figure 22. Charging schematic.

### 5.3.2 Charging

Figure 20 is a schematic view of the spring charging parts of the stored energy mechanism.

The major component of the mechanism is a cam shaft assembly which consists of a drive shaft to which are attached two closing spring cranks (one on each end), the closing cam, drive plates, and a free-wheeling ratchet wheel. The ratchet wheel is actuated by an oscillating mechanism driven by the motor eccentric. As the ratchet wheel rotates, it pushes the drive plates which in turn rotate the closing spring cranks and the closing cam with it.

The closing spring cranks have spring ends connected to them, which are in turn coupled to the closing springs. As the cranks rotate, the closing springs are charged. When the closing springs are completely charged, the spring cranks go over dead center, and the closing stop roller comes against the spring release latch. The closing springs are now held in the fully charged position.

Closing springs may also be charged manually. Insert the maintenance tool in the manual charging socket. Move it up and down approximately 28 to 38 times until a clicking sound is heard, and the closing springs charging indicator indicates "Charged." Any further motion of the maintenance tool will result in free wheeling of the ratchet wheel.

### 5.3.3 Closing operation

Figure 19 shows the position of the closing cam and tripping linkage. Note that in Figure 19a in which the circuit breaker is open and the closing springs are discharged, the trip "D" shaft and trip latch are in the unlatched position.

Once charged, the closing springs can be released to close the circuit breaker by moving the spring release latch out of the way. This is done electrically or manually by depressing the spring release lever, which turns the spring release latch out of the way of the closing stop roller. The force of the closing spring rotates the cam shaft through the spring cranks. The closing cam, being attached to the camshaft, in turn rotates the pole shaft through the main link to close the circuit breaker.

In Figure 19c the linkage is shown with the circuit breaker in the closed position before the closing springs have been recharged. Interference of the trip "D" shaft with the trip latch prevents the linkage from collapsing, and the circuit breaker is held closed.

Figure 19d shows the circuit breaker in the closed position after the closing springs have been recharged. Note that the spring charging rotates the closing cam by one-half turn. Since the cam surface in contact with the main link roller is cylindrical in this region, the spring charging operation does not affect the mechanism linkage.

Since the primary contacts are completely enclosed in the vacuum interrupter and not adjustable in any way, a "Slow Close" capability is not provided with VCP-W circuit breakers.

### 5.3.4 Tripping operation

When the trip "D" shaft is turned either by the trip button or trip coil, all links return to the original "Open" condition shown in Figure 19a.

### 5.3.5 Trip free operation

When the manual trip button is held depressed, any attempt to close the circuit breaker results in the discharge of the closing springs without any movement of the pole shaft or vacuum interrupter stem.


### 5.4 Control schemes

There are two basic control schemes for VCP-W circuit breakers: one for DC control and one for AC control voltages (Figure 21), however, there are many other more advanced control schemes that can be configured by the switchgear provider. There may be different control voltages or more than one tripping element, but the principal mode of operation is as follows.


As soon as the control voltage is applied, the spring charging motor automatically starts charging the closing springs. When the springs are charged, the motor cut off LS1/bb switch turns the motor off. The circuit breaker may be closed by making the control switch close (CS/C) contact. Automatically upon closing of the circuit breaker, the motor starts charging the closing springs. The circuit breaker may be tripped at any time by making the control switch trip (CS/T) contact.

Note the position switch (PS1) contact in the spring release circuit in the scheme. The contact remains made while the circuit breaker is being levered between the TEST and CONNECTED positions. Consequently, it prevents the circuit breaker from closing automatically, even though the control close contact (CS/C) may have.

### ANSI STANDARD VCP-W BREAKER DC CONTROL SCHEMATIC '96

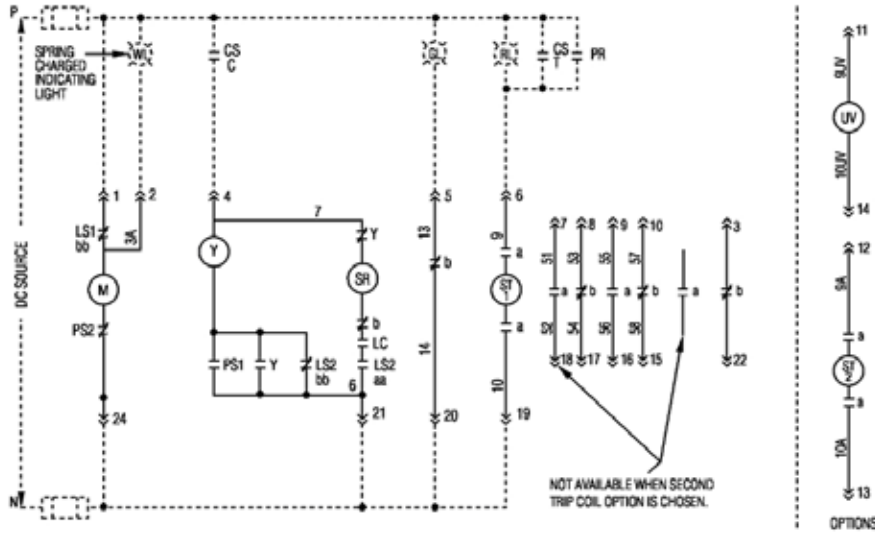

### ANSI STANDARD VCP-W BREAKER AC CONTROL SCHEMATIC '96

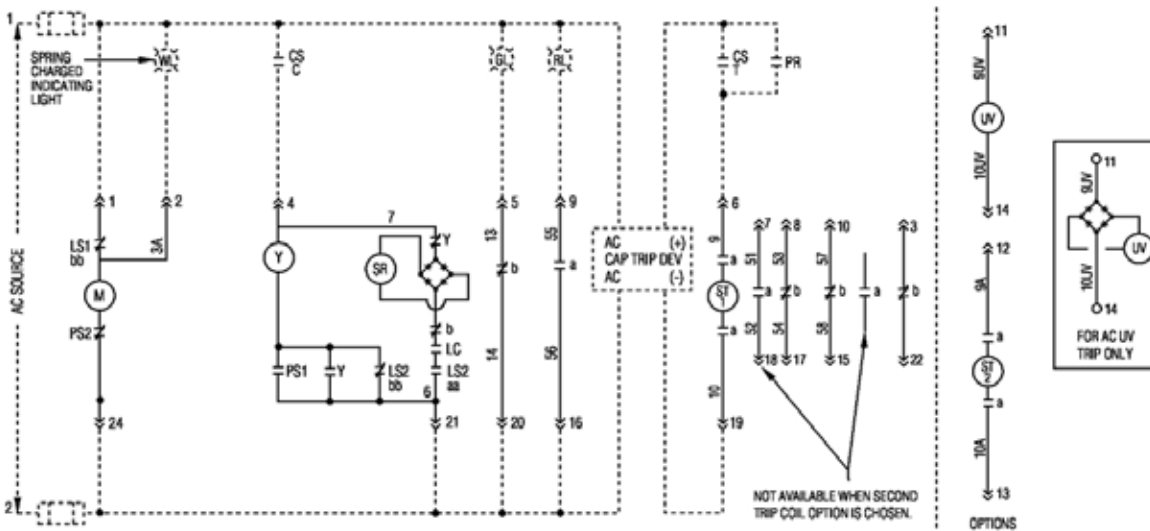

- CS - Breaker Control Switch - close
- C - Breaker Control Switch - trip
- CS - Breaker Control Switch - trip
- Y - Anti Pump Relay
- SR - Spring Release Coil (Close Coil)
- M - Spring Charging Motor
- ST - Shunt Trip Coil
- PR - Protective Relay
- ↔ - Secondary Disconnect

#### OPERATION

- LS1 bb - Closed until springs are fully charged
- LS2 aa - Open until springs are fully charged
- LS2 bb - Closed until springs are fully charged
- LC - Open until mechanism is reset
- PS1 - Open in all except between TEST and CONNECTED Positions
- PS2 - Closed in all except between TEST and CONNECTED Positions

#### SWITCH TERMINAL

- 'C' and 'NO' - Brown Switch
- 'C' and 'NC' - Black Switch
- 'C' and 'NO' - Black Switch
- 'C' and 'NC' - Black Switch
- 'C' and 'NO' - Black Switch

Figure 23. Typical VCP-W DC and AC control schemes. (Dashed lines represent customer wiring and components. This is just one of the many wiring methods that can be used to control the breaker.)

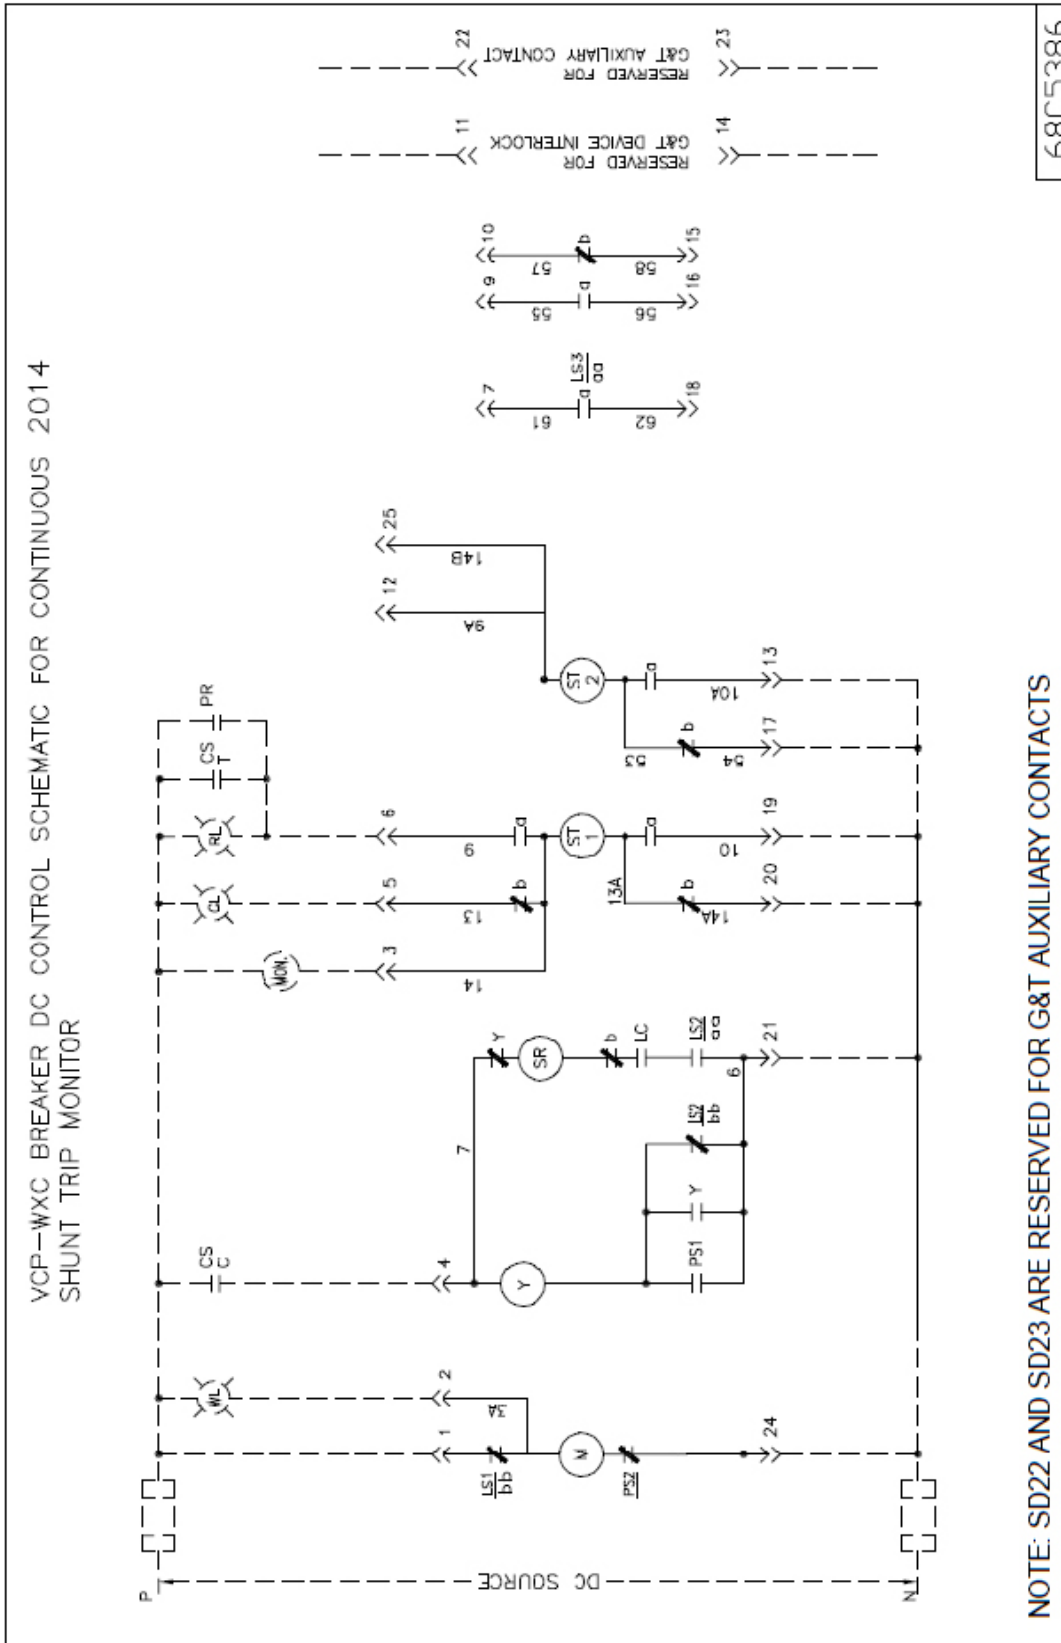


Figure 24. 15 kV VCP-WXC 63 kA 1200-3000 A special power plant breakers, styles: 4A35390G10, 4A35391G10, 4A35392G10 - DC control scheme and diagram. (Dashed lines represent customer wiring and components.)

**Note:** This differs from the standard VCP-W breaker with the addition of a third motor-cut-off switch and other wiring changes.

**⚠ WARNING**

**15 KV VCP-WXC 63 KA 1200-3000 A SPECIAL POWER PLANT BREAKERS  
STYLES: 4A35390G10, 4A35391G10, 4A35392G10 CIRCUIT BREAKERS  
ARE CONFIGURED FOR POWER PLANT SPECIFIC APPLICATIONS ONLY.  
POTENTIALLY SEVERE UNINTENDED CONSEQUENCES COULD RESULT IF  
THESE DEVICES ARE MISAPPLIED. PLEASE CONSULT AN EATON APPLICA  
TION ENGINEER FOR ANY QUESTIONS BEFORE USE OF THESE PRODUCTS.**

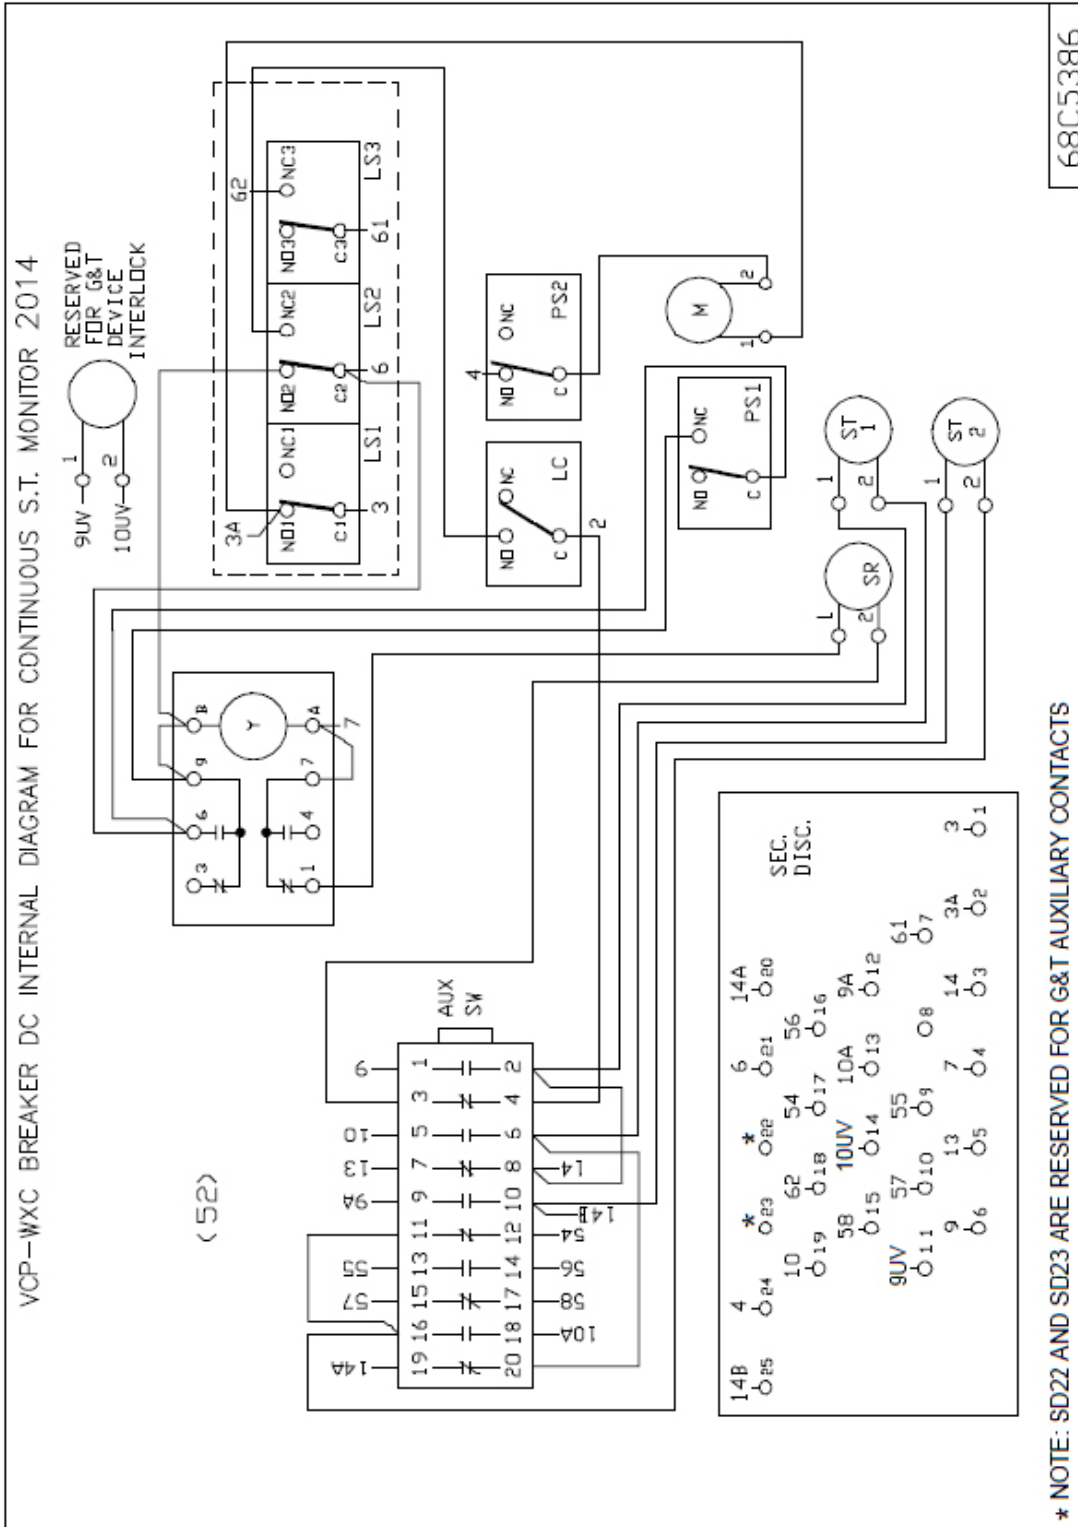


Figure 25 3 - 5 kV VCP-WXC 63 KA 1200-3000 A special power plant breakers, styles: 4A35390G10, 4A35391G10, 4A35392G10 - DC control scheme and diagram (continued from previous page).



When the CS/C contact is made, the SR closes the circuit breaker. If the CS/C contact is maintained after the circuit breaker closes, the Y relay is picked up. The Y/a contact seals in Y until CS/C is opened. The Y/b contact opens the SR circuit, so that even though the circuit breaker would subsequently open, it could not be reclosed before CS/C was released and remade. This is the anti-pump function.

#### 5.4.1 Timing

The opening and closing times for the circuit breakers vary depending upon the control voltage and the power rating. Typical values for VCP-W breaker elements are shown in Table 30.

**Table 29. Circuit breaker timing (made while the circuit breaker is levered to the CONNECTED position).**

Event	Milliseconds (maximum)
Closing time (From Initiation of close signal to contact make)	45-60
Opening time (Initiation of trip signal to contact break)	30-45
Reclosing time (Initiation of trip signal to contact make)	140-165

#### 5.4.2 Secondary disconnects

The circuit breaker control wiring is arranged to connect a standard 25 point male plug with a corresponding switchgear compartment mounted female plug. The circuit breaker plug is fixed mounted on the left side under the bottom pan of the mechanism (Figure 14). The female plug is mounted in the compartment on a movable carriage (Figure 12).

To engage secondary contacts:

- **For BPI:** secondary contacts engage automatically in TEST position
- **For non-BPI:** raise the handle and pull the carriage all the way towards the front (Figure 15).
- **For automatic/manual hybrid:** raise the handle, spring pressure will force the carriage all the way towards the front. Check contacts fully engaged.

To disengage secondary contacts:

- **For BPI:** rack the breaker to the DISCONNECT position.
- **For non-BPI:** push the carriage to the rear, contacts will disengage.
- **For automatic/manual hybrid:** push the carriage to the rear against spring pressure, contacts will disengage. Allow carriage handle to catch in latch cutout of mechanism.

#### 5.4.3 Shunt trip device


The shunt trip device is an electro-mechanical device that operates to open the circuit breaker. When the coil is energized by some external source, it will trip the breaker open. The shunt trip device is available with rated voltages of 24 Vdc, 48 Vdc, 125 Vdc, 250 Vdc, 120 Vac, and 240 Vac. A cap trip device must be used with the 120 Vac and 240 Vac options. If needed, continuous trip coil monitoring is available. Also there is an option to have a second shunt trip which can be rated at a different voltage other than the voltage specified for the primary shunt trip.

#### 5.4.4 Under-voltage trip device

The under-voltage trip device for VCP-W circuit breakers is an electro-mechanical device that operates to open the circuit breaker at 30% or less of the voltage rating of the trip coil. The device does not open the circuit breaker at values above 60% of the voltage rating of its trip coil. It may operate, however, to open the circuit breaker when the voltage across the trip coil is greater than 30%, but less than 60% of the voltage rating of its trip coil. The circuit breaker can be closed as long as the voltage to the trip coil is maintained at 85% or above the rated level. The under-voltage trip device is available only as an instantaneous type with rated voltages of 48 Vdc, 125 Vdc, 250 Vdc, 120 Vac, and 240 Vac.

For a basic understanding of the operation of the under-voltage trip device refer to the specific items identified in Figure 23 and the following operation description.

1. With the circuit breaker closed and sufficient voltage on the under-voltage trip device coil, the moving clapper (1) is held to the stationary yoke (2) by the magnetic force produced by the coil (3) against the extension springs (4) pulling the moving clapper apart from the yoke.
2. The moving clapper is connected to the mechanism trip "D" shaft lever (5) by a slotted link (6).
3. When the voltage to the under-voltage trip coil goes down as described earlier, the extension springs force overcomes the reduced magnetic force and pulls the moving clapper up. The slotted link in turn upsets the trip "D" shaft and the circuit breaker trips open.
4. As the circuit breaker opens, the reset lever (8) connected to the pole shaft lever (7) operates to reset the moving clapper. As long as the circuit breaker remains open, the reset lever holds down the moving clapper to the yoke.
5. When the circuit breaker closes, the reset lever moves away from the moving clapper. If the under-voltage trip device coil has at least 85% of the rated voltage applied, the moving clapper is held to the yoke by the magnetic force, even though the reset lever has moved up.

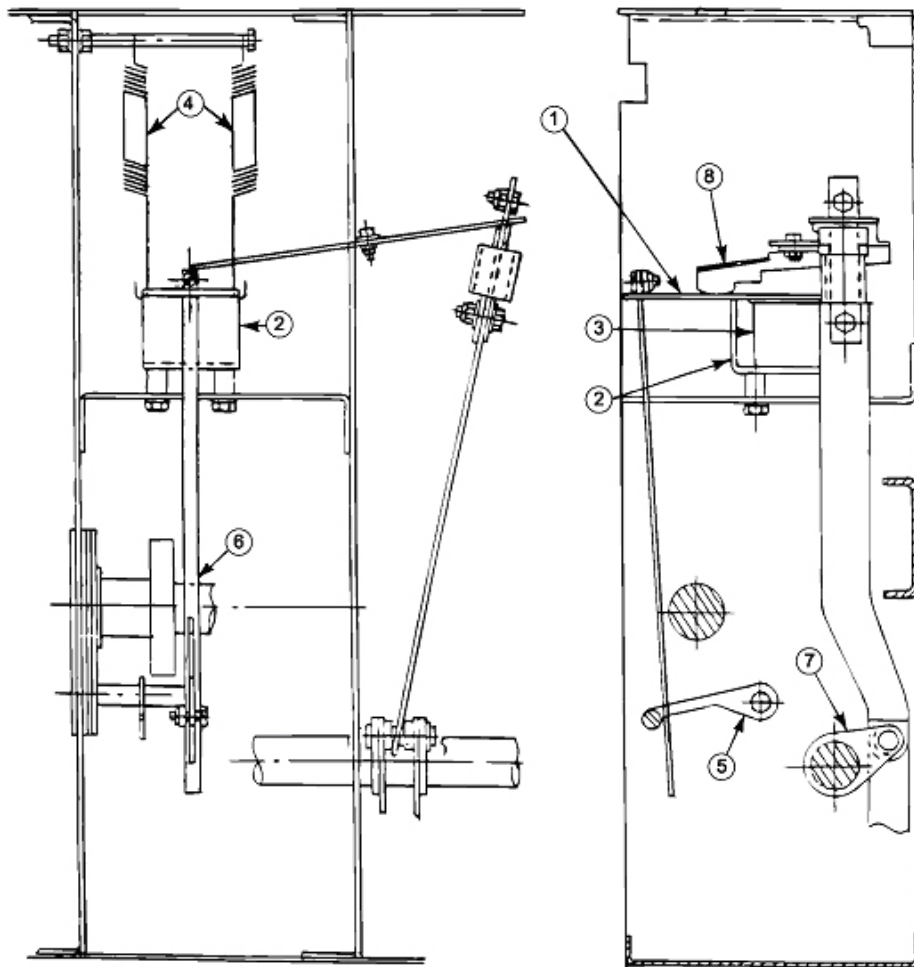

- |                        |                       |
|------------------------|-----------------------|
| 1. Moving clapper      | 5. Trip D shaft lever |
| 2. Stationary yoke     | 6. Slotted link       |
| 3. UV trip device coil | 7. Pole shaft lever   |
| 4. Extension springs   | 8. Reset lever        |

Figure 25. 15 kV under-voltage trip device configuration.

## 5.5 Interlocks and interfacing

Refer to Paragraph 4.9 of this manual for detailed information concerning circuit breaker interlocks and their interfacing with a switchgear structure compartment. In addition, refer to the instruction manual supplied with the switchgear assembly.

## 5.6 Levering mechanism

### BPI pan assembly: (Figure 12)

The purpose of the levering device is to move the circuit breaker between the DISCONNECT, TEST, and CONNECTED positions. For Type VCP-W circuit breakers, the device is a racking screw, racking nut, and moving block.

Although the device is mounted in the switchgear compartment, a brief description here will help understand the operation (Figures 13 and 17). For additional information on the insertion and removal of a circuit breaker from its compartment, refer to paragraph 4.8.1 in this manual.

The levering device consists of a racking screw, a racking nut, moving block, two side rails, and a slider. In the DISCONNECT position, the moving block is all the way to the front of the racking screw. As the circuit breaker is pushed into the breaker cell, the levering latch snaps on the moving block. In this position the front cover of the breaker will be aligned with the black line associated with the green area of the label. In order to turn the racking nut, push on the slider with the levering-in crank until fully engaged. Turning the levering-in crank clockwise while still pushing forward on the slider advances the circuit breaker toward the TEST (approximately six full turns) position. In this position, the front cover of the breaker will be aligned with the black line associated with the yellow area of the label. During this travel, the trip floor tripper is lifted up holding the circuit breaker trip free. When the circuit breaker reaches the TEST position, the breaker can be closed. Turning the levering-in crank clockwise while pushing forward advances the circuit breaker toward the CONNECT position.

Rotate the levering-in crank in a clockwise direction until the torque limiter on the levering-in crank "breaks free." As a position verification:

- **BPI pan assembly:** the breaker cover plate MUST align with the black line associated with the CONNECTED position, location shown on the BPI label (Figure 12, item 7).

If the circuit breaker is closed in the CONNECTED position, the slider can be pushed forward to permit engagement of the levering-in crank which will trip the breaker by pushing up on the trip floor tripper. This functionality is enabled by the "L" shaped slider interlock.

The breaker can be moved to the TEST position by pushing forward on the levering-in crank and turning the racking screw counterclockwise until the breaker reaches the TEST position.

The breaker can be moved to the DISCONNECT position by pushing forward on the levering-in crank and turning the racking screw counterclockwise until the breaker reaches the DISCONNECT position (approximately six full turns).

The circuit breaker levering latch can be disengaged only when the circuit breaker is in the DISCONNECT position by lifting the lift/pull handle. As the circuit breaker is withdrawn, it comes out with the contacts open and the springs discharged because of the close floor tripper and trip floor tripper interlocks.

### Non-BPI pan assembly: (Figure 14)

The purpose of the levering device is to move the circuit breaker between the TEST and CONNECTED positions. For Type VCP-W circuit breakers, the device is a racking screw, racking nut, and moving block.

Although the device is mounted in the switchgear compartment, a brief description here will help understand the operation (Figures 14 and 16). For additional information on the insertion and removal of a circuit breaker from its compartment, refer to paragraph 4.8.1 in this manual.

The levering device consists of a racking screw, a racking nut, moving block, two side rails, and a slider. In the TEST position, the moving block is all the way to the front of the racking screw. As the circuit breaker is pushed into the breaker cell, the levering latch snaps on the moving block. In order to turn the racking nut, push on the slider with the levering-in crank until fully engaged. Turning the levering-in crank clockwise while still pushing forward on the slider advances the circuit breaker toward the CONNECTED position. During this travel, the Trip Floor Tripper is lifted up holding the circuit breaker trip free. When the circuit breaker reaches the CONNECTED position, the levering-in crank will "spin-free" and cannot advance the breaker any further. A red flag indicates that the circuit breaker is fully engaged.

If the circuit breaker is closed in the CONNECTED position, the slider cannot be pushed forward to permit engagement of the levering-in crank due to the "Z" shaped slider interlock.

After tripping the circuit breaker, push on the slider with the levering-in crank until fully engaged. Turning the levering-in crank clockwise while still pushing forward on the slider advances the circuit breaker toward the DISCONNECT position. This position is indicated by no further motion of the crank and by the green flag indicating that the circuit breaker has reached the TEST position

**Automatic/manual hybrid secondary** (optional - Figure 45): It will function the same as the Non-BPI pan assembly above due to the replacement of the "L" bracket with the "Z" bracket.

## 5.7 Operations counter

All circuit breakers are equipped with a mechanical operations counter. As the circuit breaker opens, the linkage connected to the pole shaft lever advances the counter reading by one (Figure 5).

## 5.8 Ground contact

The ground contact is an assembly of spring loaded fingers providing a disconnectable means for grounding the circuit breaker chassis, after it has been inserted into a switchgear structure. The ground contact is located on the left side of the circuit breaker under the mechanism bottom pan. An extension of the switchgear ground bus is secured to the cell floor in such a position to engage the ground contact automatically, when the circuit breaker is moved into the DISCONNECT or DISCONNECT / TEST position. It remains engaged in all other circuit breaker positions within the cell (Figures 13, 14, and 16).

## 5.9 MOC and TOC switch operations

The mechanism operated cell (MOC) switch operator is coupled to the pole shaft (Figure 14). In the TEST and CONNECTED positions of the circuit breaker, the operator aligns directly above the MOC switch bell crank levers in the cell. As the circuit breaker closes, the operator moves down and pushes the bell crank lever to change the MOC switch contact position. Thus, the MOC switch contacts operate in the same manner as the auxiliary switch contacts in the circuit breaker. Although the MOC switch operator is provided on all circuit breakers, the cell mounted MOC switches are only provided when specified with the switchgear order. The standard electrical connector for the control wires is a plug on style connector. Optional ring tongue lug connectors can be provided.

The truck operated cell (TOC) switch operator is mounted inside the right corner of the circuit breaker cell (Figure 14). It operates the TOC switch as the circuit breaker moves to the CONNECTED position in the switchgear cell.

## 6. Inspection, maintenance, and trouble-shooting

### 6.1 Introduction

---

#### WARNING

---

- **DO NOT WORK ON A BREAKER ELEMENT WITH PRIMARY POWER APPLIED.**
- **DO NOT WORK ON A BREAKER ELEMENT WITH SECONDARY CONTACTS CONNECTED.**
- **DO NOT WORK ON A BREAKER ELEMENT WITH SPRINGS CHARGED OR CONTACTS CLOSED.**
- **DO NOT DEFEAT ANY SAFETY INTERLOCKS.**
- **DO NOT LEAVE MAINTENANCE TOOL IN THE SOCKET AFTER CHARGING THE CLOSING SPRINGS.**
- **DO NOT STAND LESS THAN ONE METER AWAY FROM THE BREAKER ELEMENT WHEN TESTING FOR VACUUM INTEGRITY.**

**FAILURE TO FOLLOW ANY OF THESE INSTRUCTIONS MAY CAUSE DEATH, SERIOUS BODILY INJURY, OR PROPERTY DAMAGE. SEE SECTION 2 - SAFE PRACTICES - FOR MORE INFORMATION.**

---

### 6.2 Frequency of inspection and maintenance

Periodic inspections and associated maintenance are essential to the safe and reliable operation of VCP-W vacuum circuit breaker elements. The inspection frequency and associated maintenance recommended are intended to insure the best possible ongoing service. It is imperative that an established schedule be followed. To establish an exact schedule for a specific installation, use the following guidelines.

1. Customers such as utilities having extensive experience with power distribution components should schedule their inspection and maintenance intervals using well established best practices in their industry.
2. All other customers should use the following guidelines as good conservative practice:
  - a. For installations defined as normal service conditions per IEEE C37.20.2 and considered clean, non-corrosive environments, inspect, and maintain each circuit breaker every 500 operations or 10 years, whichever comes first. If it is determined after completing the "Inspection and maintenance procedures" in section 6.3 of this manual that the breaker is still like new based on visual inspection and performance, then the next maintenance interval shouldn't exceed 500 operations or 10 years from the date of the inspection.
  - b. For special conditions such as frequent circuit breaker element operation, contaminated environments, and high temperature/humidity conditions, the inspection frequency should be a minimum of twice per year.

3. Fault interruptions have the greatest impact on contact erosion inside of the vacuum interrupters. Circuit breakers that have been subjected to 15 full rated fault interruptions should be immediately inspected and the schedule for inspection and maintenance should be re-evaluated based upon the inspection results. Additionally, because of the variability of system fault characteristics, if there are any customer uncertainties in the records of the magnitude, duration, or other fault details, increased inspection frequency should be considered.
4. Follow the steps presented in paragraph 6.3 entitled "Inspection and Maintenance Procedures" for scheduled programs.
5. Create and maintain a dated permanent record of all inspections, maintenance performed, actions taken, observations made, and measurements taken. Not only will this provide valuable historical information, it can help to establish whether or not the present schedule needs to be adjusted.
6. Perform ongoing visual inspections, when possible, of all equipment on a regular basis. Be alert for an accumulation of dirt in and around the circuit breaker elements, loose hardware or discolored insulation.

For assistance in establishing or updating a detailed inspection and maintenance schedule for a specific application, please contact your local Eaton representative.

Eaton's vacuum interrupters are tested to exceed the minimum fault interruptions as required by IEEE/ANSI and IEC Standards without inspection. Please contact your local Eaton representative if you would like a copy of the life curve of the vacuum interrupters in your specific circuit breakers.

In addition to the instructions in this instruction book, Eaton has created a visual tool to assist maintenance personnel. Contact Eaton for the **Visual Instruction Booklet Essentials (VIBE)** which is an interactive PDF with embedded videos to show how to perform many common types of field testing and part replacements.

#### 6.2.1 Qualified personnel

For the purpose of operating this type of equipment, only individuals thoroughly trained in the operation of power circuit breakers and associated equipment, and having knowledge of connected loads may be considered to be qualified.

Refer to further definitions in the National Electrical Safety Code.

For the purpose of inspecting and maintaining such equipment, a qualified person must also be trained in regard to the hazards inherent to working with electricity and the proper way to perform such work. Such an individual should be able to de-energize, clear, and tag circuits in accordance with established safety practices. In addition, these individuals should have access to and be trained in the use of protective equipment, such as rubber gloves and flash clothes.

All personnel should be familiar with and understand the material presented in this instruction manual and other related manuals.

6.2.2 General torque guidelines

Bolts and screws must be properly torqued. This is especially true if part(s) and/or accessory(ies) are added or replaced. Table 31 provides guidelines on torque levels. The table is intended as a general guideline and should be applied in conjunction with the experience and good judgment of the individual performing the work.

**⚠ CAUTION**

**OVER TORQUING CAN CAUSE PERMANENT DAMAGE WHILE UNDER TORQUING WILL NOT PROVIDE THE PROPER CLAMPING FORCE AND MAY EVENTUALLY WORK LOOSE.**

**Table 30. Torque guidelines.**

Bolt size	Torque lb-in (lb-ft)
8 - 32	24
10 - 32	36
1/4 - 20	72 (6 lb-ft)
5/16 - 18	144 (12 lb-ft)
3/8 - 16	300 (25 lb-ft)
1/2 - 13	540 (45 lb-ft)

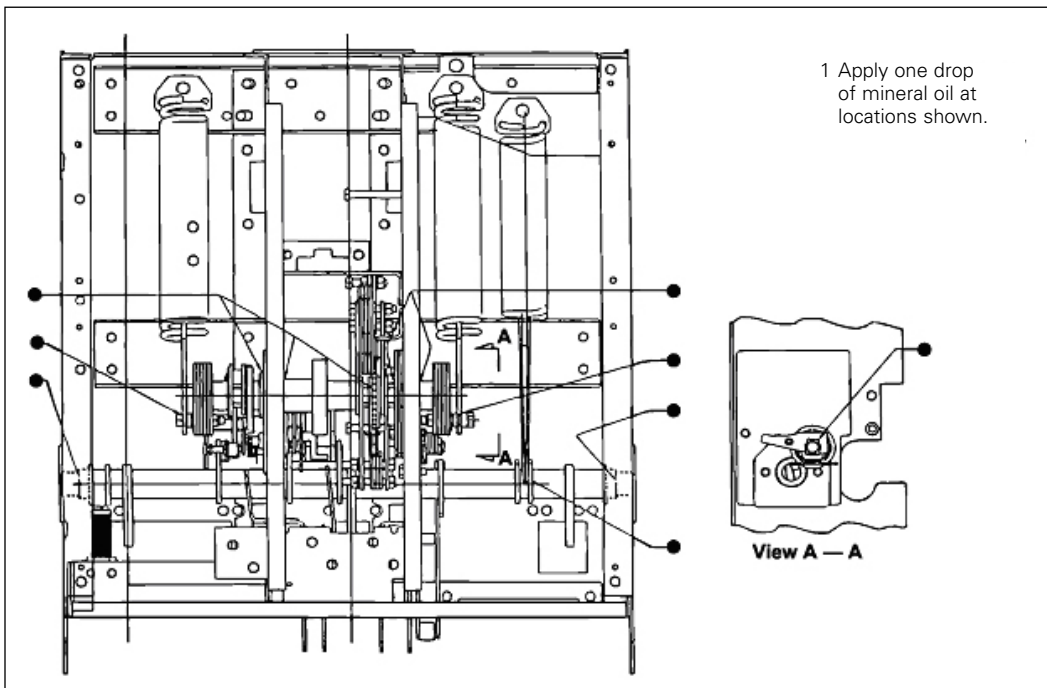


Figure 26. Lubrication points.

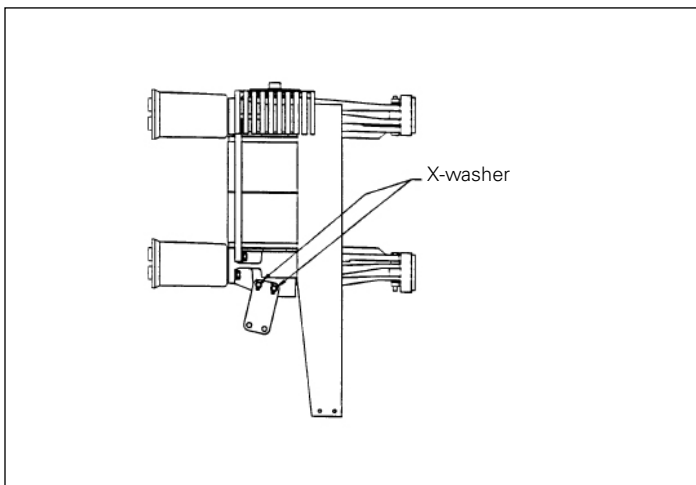


Figure 27. 50 VCP-W 63 - 63 kA pole unit.

**6.3 Inspection and maintenance procedures**

No./section	Inspection item	Criteria	Inspection method	Corrective action
1. Insulation	Drive insulator, barriers, and stand-off insulators	No dirt and No cracking	Visual check	Clean with lint-free cloth or replace cracked piece.
Insulation integrity	Main circuit to ground	Withstand	Hipot tester	Clean and retest or replace .
	Between main circuit terminals	Withstand	Hipot tester	Clean and retest or replace.
	Control circuit to ground	Withstand	Hipot tester	Clean and retest or replace.
2. Power elements	Vacuum interrupters	Visibility of contact erosion marks	Visual - Close the circuit breaker and observe if all black, blue or machined groove marks on moving stems are visible	If a mark is not visible, then check if the pole unit plastic bushing is intact on the moving stem of the VI just below the cup plate. If the bushing is intact, then replace the interrupter assembly and perform contact wipe check. If the bushing is NOT intact, then glue back the bushing to the cup plate and observe the mark again.
		Contact wipe indicator visible	Refer to paragraph 6.5	Replace interrupter assembly.
		Adequate vacuum	Proceed with integrity check as described in Paragraph 6.4	If integrity check is not satisfactory, replace interrupter assembly.
	Primary disconnects	Dirt on ceramic body No burning or damage	Visual check Visual check	Clean with lint-free cloth. Replace if burned, damaged or eroded.
	Pole unit X-washers for 150 VCP-W 63	Every 1000 operations	Operation counter	Replace all X-washers per Figure 25.
3. Control circuit parts	Closing and tripping device including disconnects	Smooth and correct operation by control power	Test closing and tripping of the circuit breaker twice	Replace any defective device. Identify per trouble-shooting chart .
	Wiring	Securely tied in proper place	Visual check	Repair or tie as necessary.
	Terminals	Tight	Visual check	Tighten or replace if necessary.
	Motor	Smooth, normal operation	Functional test	Replace brushes or motor.
4. Operating mechanism	Tightness of hardware	No loose or missing parts	Visual and by feel	Refer to Table 31 and tighten or reinstate if necessary with appropriate tools.
	Dust or foreign matter	No dust or foreign matter	Visual check	Clean as necessary.
	Lubrication	Smooth operation and no excessive wear	Sight, feel and per maintenance schedule	Refer to Figure 24 and paragraph 6.10 and lubricate very sparingly with mineral oil.
	Deformation or excessive wear	No excessive deformation or wear	Visual and operational	Remove cause and replace parts.
	Manual operation	Smooth operation	Manual charging, closing and tripping	Correct per troubleshooting chart if necessary.
	CloSure test	0.6 inch over-travel	CloSure Test (6.9.1)	If < 0.6, contact your local Eaton Sales and Service Center.

#### 6.4 Vacuum interrupter integrity test

Vacuum interrupters used in Type VCP-W vacuum circuit breaker elements are highly reliable interrupting elements. Satisfactory performance of these devices is dependent upon the integrity of the vacuum in the interrupter and the internal dielectric strength. Both of these parameters can be readily checked by a one minute AC high potential test. Refer to Table 31 for the appropriate test voltage. During this test, the following warning must be observed.

#### **⚠ WARNING**

**APPLYING ABNORMALLY HIGH VOLTAGE ACROSS A PAIR OF CONTACTS IN VACUUM MAY PRODUCE X-RADIATION. THE RADIATION MAY INCREASE WITH THE INCREASE IN VOLTAGE AND/OR DECREASE IN CONTACT SPACING. X-RADIATION PRODUCED DURING THIS TEST WITH RECOMMENDED VOLTAGE AND NORMAL CONTACT SPACING IS EXTREMELY LOW AND WELL BELOW MAXIMUM PERMITTED BY STANDARDS. HOWEVER, AS A PRECAUTIONARY MEASURE AGAINST POSSIBILITY OF APPLICATION OF HIGHER THAN RECOMMENDED VOLTAGE AND/OR BELOW NORMAL CONTACT SPACING, IT IS RECOMMENDED THAT ALL OPERATING PERSONNEL STAND AT LEAST 13 FEET (4 METERS) AWAY IN FRONT OF THE BREAKER ELEMENT.**

With the breaker element open, connect all top primary studs (bars) together and to the high potential machine lead. Connect all bottom studs together and ground them along with the breaker frame. Start the machine at zero potential, increase to appropriate test voltage and maintain for one minute.

A successful withstand indicates that all interrupters have a satisfactory vacuum level. If there is a break-down, the defective interrupter or interrupters should be identified by an individual test and replaced before placing the breaker in service.

#### **⚠ WARNING**

**AFTER THE HIGH POTENTIAL IS REMOVED, AN ELECTRICAL CHARGE MAY BE RETAINED BY THE VACUUM INTERRUPTERS. FAILURE TO DISCHARGE THIS RESIDUAL ELECTROSTATIC CHARGE COULD RESULT IN AN ELECTRICAL SHOCK. ALL SIX PRIMARY TERMINALS AND THE CENTER RING OF EACH VACUUM INTERRUPTER OF THE CIRCUIT BREAKER SHOULD BE GROUNDED TO REDUCE THIS ELECTRICAL CHARGE BEFORE COMING IN CONTACT WITH THE PRIMARY CIRCUIT.**

To avoid any ambiguity in the AC high potential test due to leakage or displacement (capacitive) current, the test unit should have sufficient volt-ampere capacity. It is recommended that the equipment be capable of delivering 25 milliamperes for one minute.

**ONLY AC HIGH POTENTIAL TESTS ARE RECOMMENDED.**

**EATON DOES NOT RECOMMEND DC POWER FREQUENCY WITHSTAND VOLTAGE TEST.**

**Table 31. Test voltage (insulation and vacuum integrity).**

<b>Breaker rated maximum voltage</b>	<b>Vacuum interrupter integrity test voltage AC 60 Hz</b>
Up to and including 5 kV	15 kV
7.5 kV - 17.5 kV	27 kV
24 kV and 27 kV	45 kV

The current delivery capability of 25 mA AC and 5 mA DC apply when all three vacuum interrupters are tested in parallel. If individual vacuum interrupters are tested, current capability may be one third of these values.

#### **⚠ CAUTION**

**SOME DC HIGH POTENTIAL UNITS, OPERATING AS UNFILTERED HALF-WAVE RECTIFIERS, ARE NOT SUITABLE FOR USE TO TEST VACUUM INTERRUPTERS BECAUSE THE PEAK VOLTAGE APPEARING ACROSS THE INTERRUPTERS CAN BE SUBSTANTIALLY GREATER THAN THE VALUE READ ON THE METER.**

#### 6.5 Contact erosion and wipe

Since the contacts are contained inside the interrupter, they remain clean and require no maintenance. However, during high current interruptions there may be a minimum amount of erosion from the contact surfaces. Maximum permitted erosion is about 1/8 in. (3.18 mm). To determine contact erosion, close the breaker and observe the vacuum interrupter moving stem from the rear of the breaker. If the mark on each stem is visible, erosion has not reached maximum value thus indicating satisfactory contact surface of the interrupter (see Figure 29). If the mark is not visible, either the vacuum interrupter assembly or the pole unit assembly must be replaced.

The adequacy of contact wipe can be determined by observing the vacuum interrupter side of the operating drive rod assembly on a closed circuit breaker. Figure 30 shows the procedure for determining the contact wipe. If the wipe is not adequate, the vacuum interrupter assembly or pole unit assembly must be replaced. A field adjustment is not possible. Refer to IL131030EN for the pole unit replacement procedure.

#### **⚠ WARNING**

**FAILURE TO REPLACE A POLE UNIT ASSEMBLY, WHEN CONTACT EROSION MARK IS NOT VISIBLE OR WIPE IS UNSATISFACTORY, WILL CAUSE THE BREAKER TO FAIL TO INTERRUPT AND THEREBY CAUSE PROPERTY DAMAGE OR PERSONAL INJURY.**



**Figure 28.** Vacuum interrupter showing contact erosion indicator with breaker open (shown here for clarity purposes only).



**Figure 29.** Vacuum interrupter showing contact erosion indicator with breaker closed (indicators are checked only when the breaker is closed).



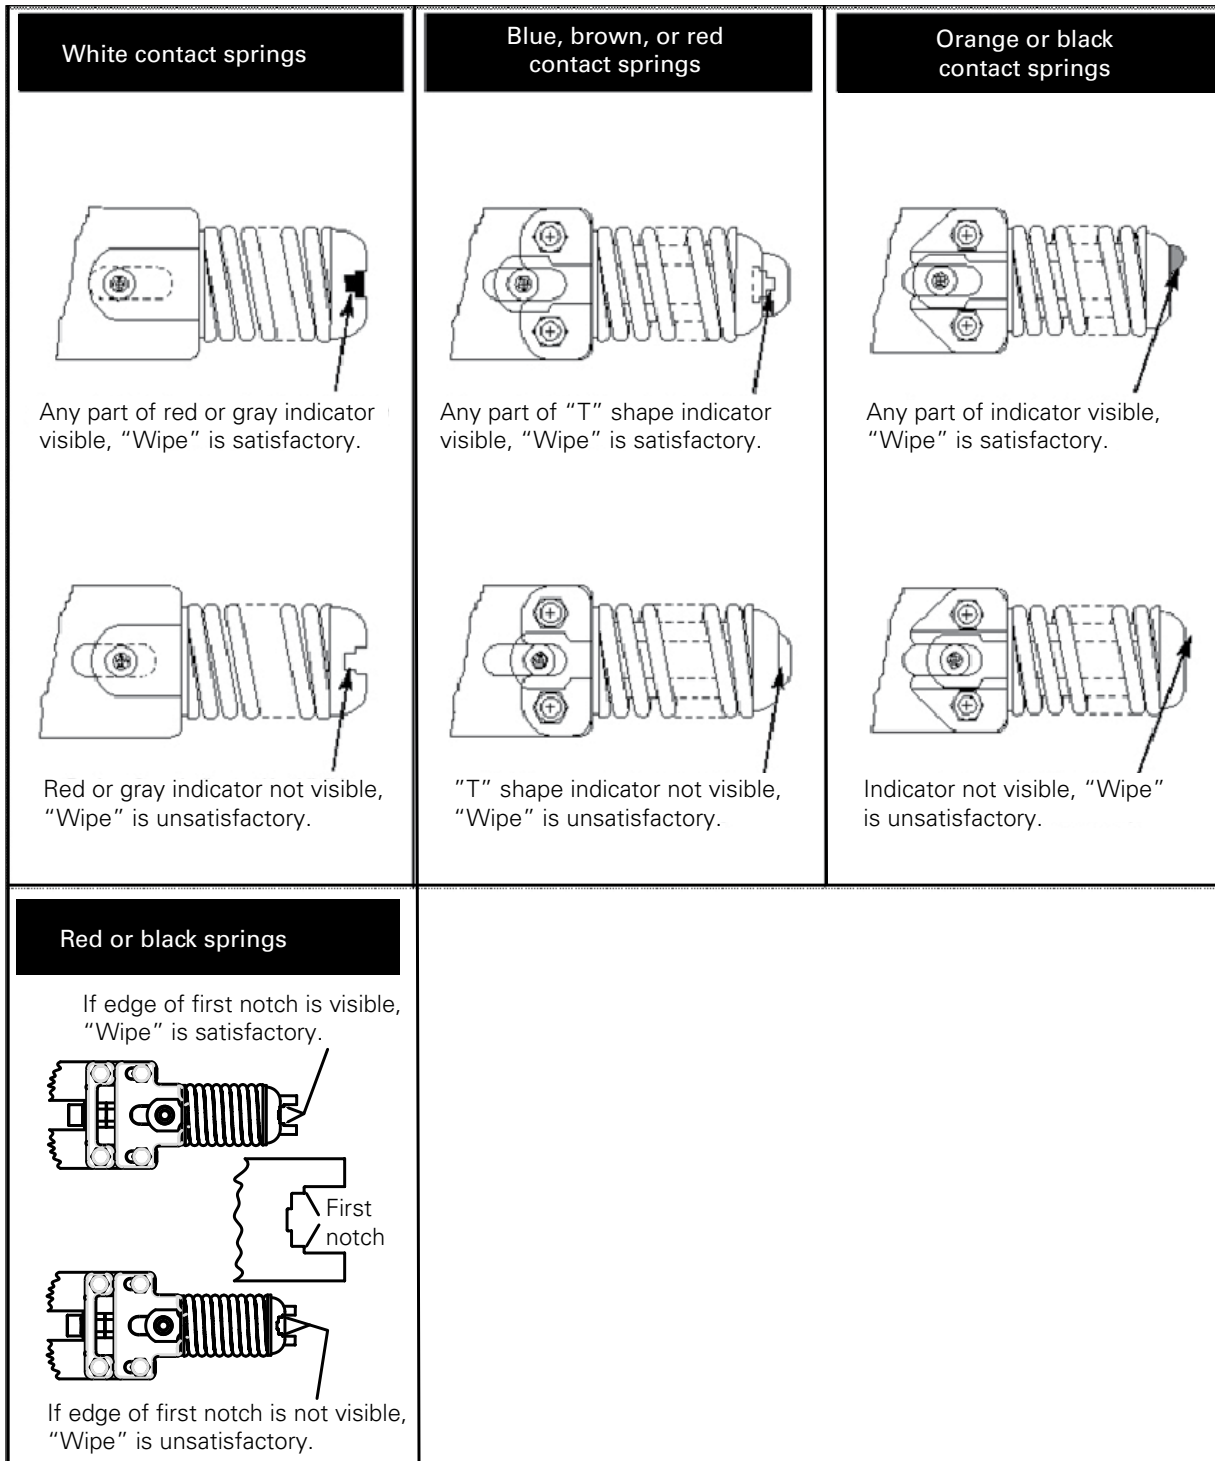


Figure 30. Wipe indication procedure (performed only with the breaker closed).

### 6.6 Insulation

Type VCP-W circuit breaker insulation maintenance primarily consists of keeping all insulating surfaces clean. This can be done by wiping off all insulating surfaces with a dry lint free cloth or dry paper towel. In case there is any tightly adhering dirt that will not come off by wiping, it can be removed with mild solvent or distilled water. Be sure that the surfaces are dry before placing the circuit breaker in service. If a solvent is required to cut dirt, use Stoddard's Solvent Eaton 55812CA or commercial equivalent. Secondary control wiring also requires inspection for insulation damage.

### 6.7 Insulation integrity check

#### Primary circuit:

The integrity of primary insulation may be checked by the 60 Hz AC high potential test. The test voltage depends upon the maximum rated voltage of the breaker. For the breaker elements rated 4.76 kV, 8.25 kV, 15 kV, and 27 kV, the test voltages are 15 kV, 27 kV, 27 kV, and 45 kV RMS respectively. Conduct the test as follows.

Close the breaker. Connect the high potential lead of the test machine to one of the poles of the breaker. Connect the remaining poles and breaker frame to ground. Start the machine with output potential at zero and increase to the test voltage. Maintain the test voltage for one minute. Repeat for the remaining poles. Successful withstand indicates satisfactory insulation strength of the primary circuit.

If a DC high potential machine is used, make certain that the peak voltage does not exceed the peak of the corresponding AC RMS test voltage.

#### Secondary circuit:

Isolate the motor by pulling apart the two insulated quick disconnecting terminals in the two motor leads provided for this purpose, or remove the two motor wires from the ring tongue terminals (Figure 5). Connect all points of the secondary disconnect pins with shooting wire. Connect this wire to the high potential lead of the test machine. Ground the circuit breaker frame. Starting with zero, increase the voltage to 1125 Vac RMS, 60 Hz. Maintain the voltage for one minute. Successful withstand indicates satisfactory insulation strength of the secondary control circuit. Remove the shooting wire and reconnect motor leads.

### 6.8 Primary circuit resistance check

Since the main contacts are inside the vacuum chamber, they remain clean and require no maintenance at any time. Unlike many typical circuit breaker designs, VCP-W breakers do not have sliding contacts at the moving stem either. Instead they use a highly reliable and unique flexible clamp design that eliminates the need for lubrication and inspection for wear.

If desired, the DC resistance of the primary circuit may be measured as follows:

- Close the circuit breaker, pass at least 100 amps DC current through the circuit breaker. With a low resistance instrument, measure resistance across the studs on the circuit breaker side of the disconnects for each pole.

The resistance should not exceed the values shown in Table 33.

**Table 32. Typical resistance measurements.**

Rated continuous current (amperes)	Resistance (microohms)
1200	60
2000	40
3000	35

### 6.9 Mechanism check

Make a careful visual inspection of the mechanism for any loose parts such as bolts, nuts, pins, and rings. Check for excessive wear or damage to the circuit breaker components. Operate the circuit breaker several times manually and electrically. Check the closing and opening times to verify that they are in accordance with the limits in Table 30.

#### 6.9.1 CloSure™ test

##### Introduction

The CloSure test is a simple yet extremely effective means to determine and monitor the ability of the mechanism to close the breaker contacts fully. It provides a quantitative measure of the extra energy available in terms of over travel in inches to close the breaker contacts to their full extent. It maybe used periodically to monitor the health of the mechanism.

At times, circuit breakers are called upon to operate mechanism operated cell (MOC) switches that place extra load upon the closing mechanism of the circuit breaker. If this load is excessive, it can prevent the circuit breaker from closing fully. In such a case, it is important to determine that the circuit breaker will close fully. The CloSure test provides this assurance.

##### General information

The CloSure test can be performed on the VCP-W, VCP-WR, VCPW-ND, DHP-VR, W-VACR, and W-VAC lines of vacuum circuit breakers. Refer to Table 34 a for list of circuit breakers. If the CloSure travel obtained is as specified, the mechanism performance is satisfactory. If the CloSure travel does not conform as shown in Figure 35, contact Eaton for further information (see Step 13).

## ⚠ WARNING

**DO NOT ATTEMPT TO INSTALL OR PERFORM MAINTENANCE OR TESTS ON THE EQUIPMENT WHILE IT IS ENERGIZED. NEVER PUT YOUR HANDS NEAR THE MECHANISM WHEN THE CIRCUIT BREAKER IS IN THE CHARGED OR CLOSED POSITION. DEATH OR SEVERE PERSONAL INJURY CAN RESULT FROM CONTACT WITH ENERGIZED EQUIPMENT. ALWAYS VERIFY THAT NO VOLTAGE IS PRESENT BEFORE PROCEEDING WITH THE TASK AND ALWAYS FOLLOW GENERALLY ACCEPTED SAFETY PROCEDURES.**

### 6.10 Megger and power factor testing

Both the megger and power factor type testing of high voltage insulation are not recognized by IEEE as a design, production, or conformance test for determining product acceptance during initial commissioning. If an end user wishes to use these tests for trending purposes, then they should record the initial readings during commissioning along with temperature and humidity during the testing. The trend of the test results should be tracked over the life of the product and any abnormalities should be investigated.

#### Safety precautions

Read and understand these instructions before attempting any maintenance, repair, or testing on the breaker. The user is cautioned to observe all recommendations, warnings, and cautions relating to the safety of personnel and equipment.

The recommendations and information contained herein are based on Eaton experience and judgment, but should not be considered to be all-inclusive or covering every application or circumstance which may arise. If further information is required, you should consult Eaton.

### Testing procedures

Assuming that the breaker is safely pulled out to the Test/Disconnect position in the enclosure or placed on the workbench, follow this procedure to perform the CloSure test. For further instructions on disconnecting the circuit breaker consult Section 4 of this manual. If the enclosure is equipped with the MOC operating in the test position also, make certain that the MOC is connected to operate.

1. On the front cover identify the status indicators. **Make sure the closing spring status indicates "Discharged" and the main contact indicator shows "Open"** (Figure 7).
2. Remove the circuit breaker front cover. **Be sure to save the original fasteners for reassembly.**
3. Cut a piece of one-inch (25.4 mm) wide drafting/masking tape approximately 8 to 10 in. (203 to 254 mm) long.



Figure 31. Starting tape at the bottom of the cam.

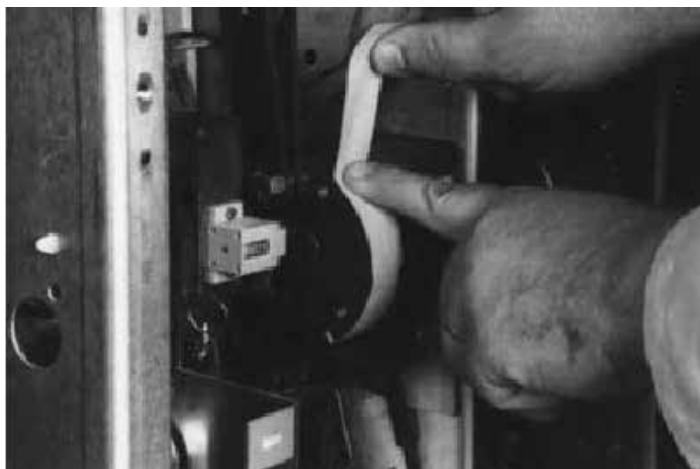


Figure 32. Wrapping tape up around the cam.

4. Place the tape around the cam starting from the bottom up. Make certain that the tape adheres well to the cam surface (see Figures 31, 32, and 33).



Figure 33. Attaching tape around to the back of the cam.



Figure 34. Attaching CloSure test tool at hole "A".

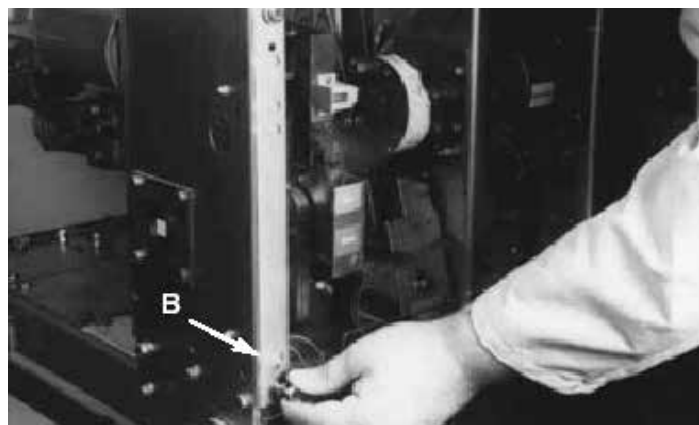


Figure 35. Attaching CloSure test tool at "B".

5. Mount the transparent CloSure test tool with two bolts and washers. Refer to Figures 44, 45, and Table 34 for appropriate mounting holes. Hand tighten the bolts (Figures 34, 35, 44, and 45).

6. A Sanford® Sharpie® black fine point permanent marker, item no. 30001, is recommended for this next step. Place the marker tip in the proper hole ("C"). Refer to Figure 42 and make a heavy mark on the tape as shown in Figure 33.

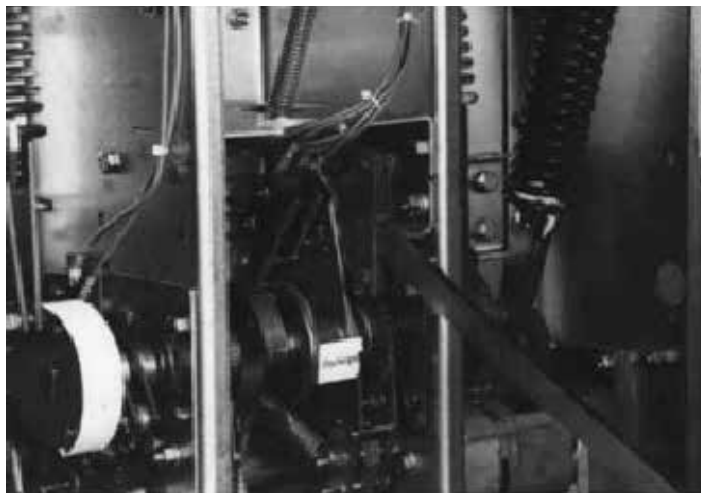


Figure 36. Manually charging the closing springs.

7. Charge the closing springs with the maintenance tool. Continue charging the closing springs until a "click" is heard and the status indicator shows "Charged" (Figure 34).
8. While holding the marker tip on the tape, close the breaker (Figure 35).
9. Move the marker back and forth horizontally approximately 15 degrees in both directions to create a line on the tape that identifies the closed rest position (Figures 38, 44, and 40).

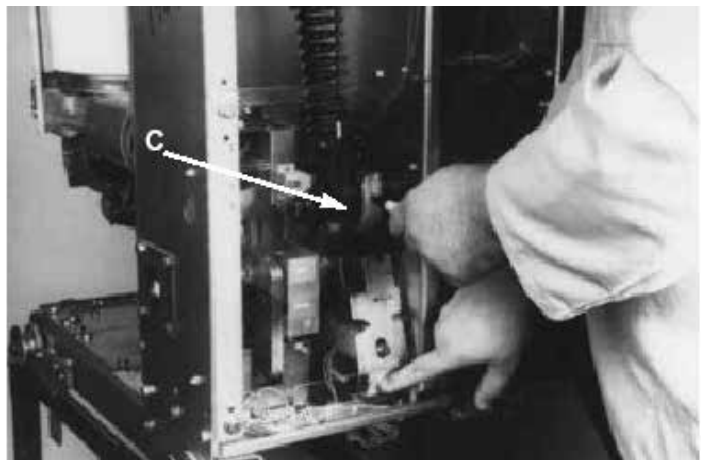


Figure 37. Manually closing the circuit breaker with the marker in hole "C".

Instructions for installation, operation,  
and maintenance of type  
VCP-W vacuum circuit breakers

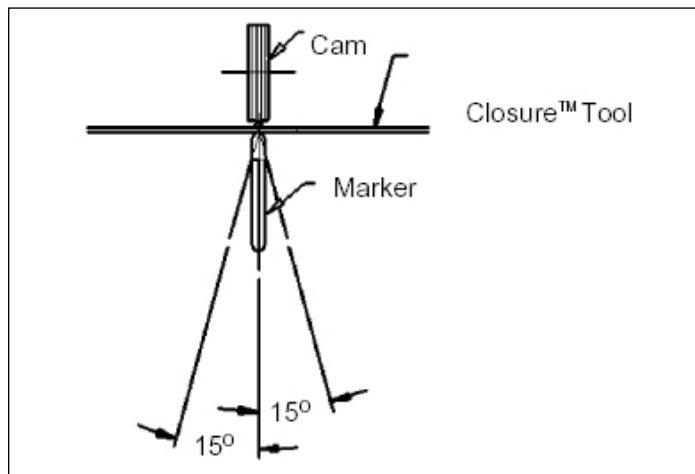


Figure 38. Top view of the cam and marker interface.

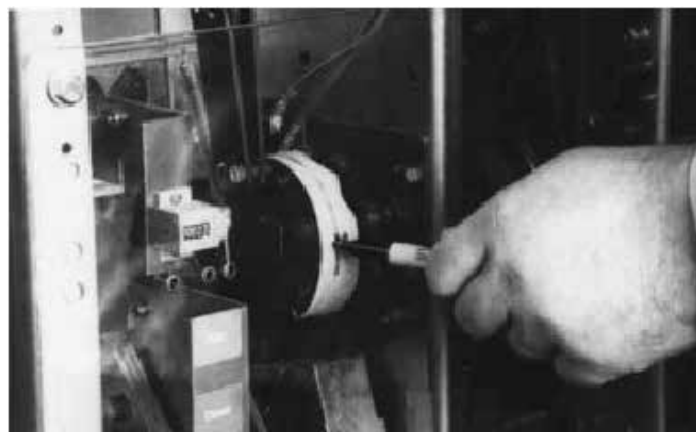


Figure 39. Move marker 15° to the right.

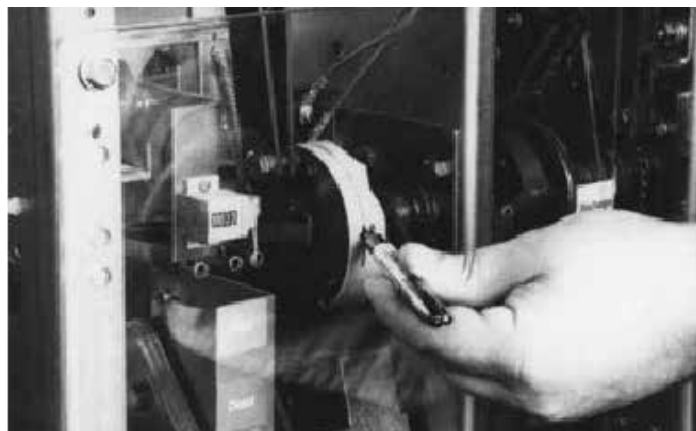


Figure 40. Move marker 15° to the left.

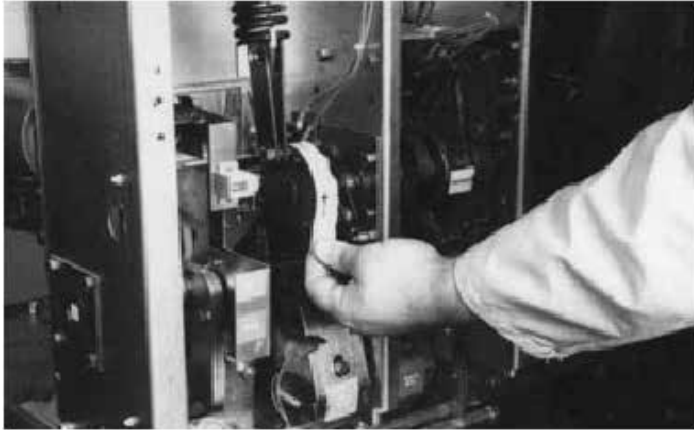


Figure 41. Remove marked masking tape from the cam.

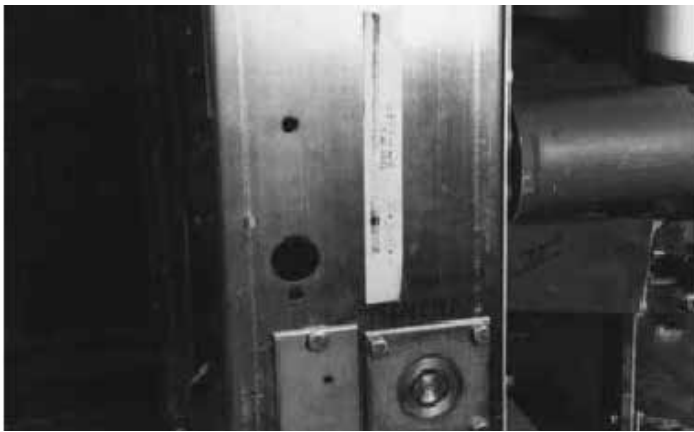


Figure 42. Place the tape on the right side panel of the breaker.

10. Remove the marker from hole "C"
11. Push the "push to open" clapper to open the circuit breaker.

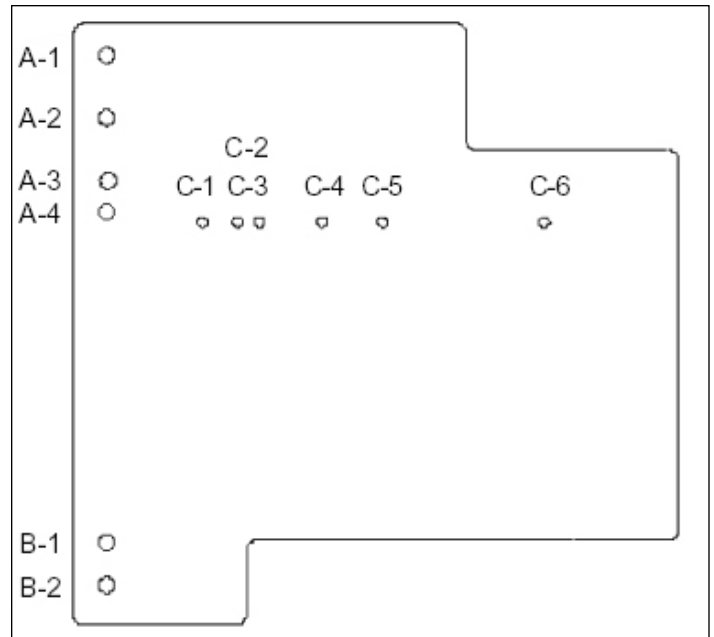


Figure 44. Front view of closure tool showing mounting/testing locations (6352C49H01).

12. Inspect the circuit breaker to assure it is in the open position and the closing springs are discharged. Remove the transparent CloSure tool. Remove the tape from the cam and stick the tape on the front right side sheet of the circuit breaker. Record the date of the test and the operations counter reading on the tape (Figures 41, 42 and 43).

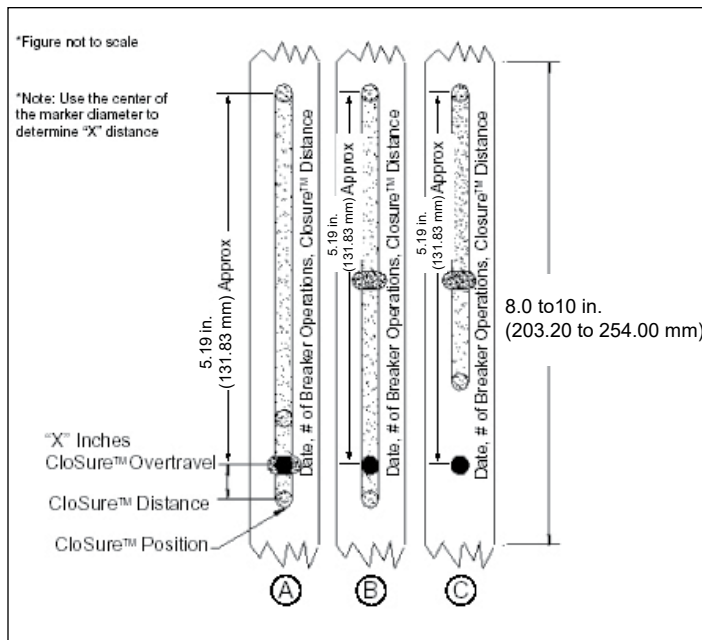


Figure 43. Illustrative testing tape sample.

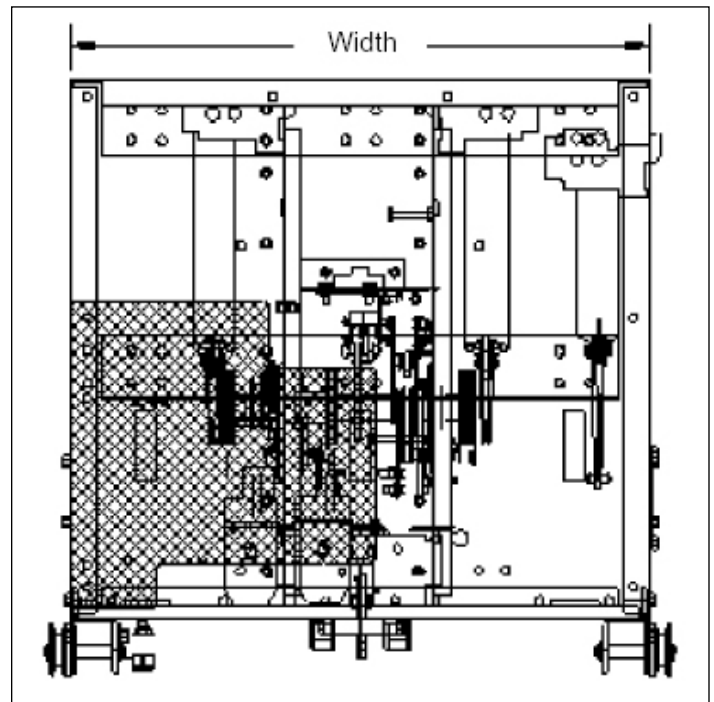


Figure 45. Typical circuit breaker front view with CloSure tool attached (approximate mechanism chassis width).

13. Evaluate the CloSure performance by comparing the test tape with the illustrations in Figure 40. If the marking is similar to 42, detail A, measure the over travel "x". If "x" is greater than or equal to 0.6 in. (15.2 mm), the circuit breaker performance is satisfactory. If "x" is less than 0.6 in. (15.2 mm) or if the marking is similar to 42, detail B or 42, detail C, immediately contact the Product Integrity Center for Technical Support at (412) 787-6518.
14. Remove the CloSure tool. Reassemble the front cover onto the circuit breaker. Return the circuit breaker to its original configuration and setup.

**6.11 Mechanism lubrication**

**For breakers built prior to 01/01/18**

All parts that require lubrication have been lubricated during the assembly with molybdenum disulfide grease (Eaton Material No. 53701 QB) which is no longer available. Over a period of time, this lubricant may be pushed out of the way or degrade. Proper lubrication at regular intervals is essential for maintaining the reliable performance of the mechanism. Once a year or every 500 operations whichever comes first, the circuit breaker should be lubricated, as shown in Figure 23, with a drop of mineral oil.

The mineral oil shall be "3-In-One" Multi-Purpose Oil. Fluorosilicone oil is not compatible with Eaton's grease and **shall not** be used in the lubrication of Eaton breakers.

**Table 33. Closure tool mounting/testing locations by circuit breaker type.**

Breaker line	Approximate mechanism cabinet width (inch)	Upper mounting hole	Lower mounting hole	Marker placement hole
DHP-VR	20	A1	B2	C2
	29	A1	B1	C5
VCPW-ND	20/21	A1	B2	C2
VCP-W,	29	A1	B2	C5
	33	A2	B2	C6
VCP-WR	18	A1	B2	C1
	20	A1	B2	C2
	29	A1	B2	C5
W-VAC, W-VACR	18	A1	B2	C1
	25	A1	B1	C4
	33	A2	B2	C6

After lubrication, operate the circuit breaker several times manually and electrically.

Roller bearings are used on the pole shaft, the cam shaft, the main link, and the motor eccentric. These bearings are packed at the factory with a top grade grease, as specified by code, which normally should be effective for many years. They should not be disturbed unless there is definite evidence of sluggishness, dirt, or parts are dismantled for some reason.

If it becomes necessary to disassemble the mechanism, the bearings and related parts should be thoroughly cleaned. Remove old grease in a good grease solvent. **Do not use carbon tetrachloride.** They should then be washed in light machine oil until the cleaner is removed. After the oil has been drawn off, the bearings should be packed with Eaton's synthetic grease.

Eaton's synthetic grease can be mixed with the molybdenum disulfide grease with no side effects.

**For breakers built after 1/1/2018**

All parts that require lubrication have been lubricated during the assembly with Eaton's new synthetic grease. Over a period of time, this lubricant may be pushed out of the way or degrade. Proper lubrication at regular intervals is essential for maintaining the reliable performance of the mechanism. Every 500 operations or 10 years whichever comes first, the circuit breaker should be lubricated.

Roller bearings are used on the pole shaft, the cam shaft, the main link, and the motor eccentric. These bearings are packed at the factory with a top grade synthetic grease which will be effective for 10 years. They should not be disturbed.

If it becomes necessary to disassemble the mechanism, the bearings and related parts should be thoroughly cleaned. Remove old grease in a good grease solvent. **Do not use carbon tetrachloride.** They should then be washed in light machine oil until the cleaner is removed. After the oil has been drawn off, the bearings should be packed with Eaton's synthetic grease.

**6.12 Finger clusters and switchgear stab lubrication**

The breaker finger clusters are shipped with a lubricating blue wax applied from the factory and the switchgear stabs are shipped with a lubricating blue wax applied from the factory. The blue wax is used instead of grease lubrication purposes for the following reasons:

1. The blue wax has a higher melting point and a lower viscosity point than grease. So the blue wax will stay on warm contact surfaces instead of dripping off like some greases.
2. Dust particles are less likely to stick to blue wax as opposed to grease. Dirty grease can be a poor conductor.
3. The blue additive is added by Eaton to provide the ability to perform visual checks of the breaker finger cluster engagement on the switchgear stabs.

The breaker should never be levered into the cell when the blue wax has been removed from the breaker finger clusters or the switchgear stabs.

When routine maintenance is performed on the breaker or switchgear, the blue wax can be reapplied under de-energized conditions. The blue wax can be purchased from Eaton by ordering material code number 83342CE.

**6.13 Main contacts to switchgear primary engagement**

When the circuit breaker is in the complete and fully connected position, the circuit breaker main contacts should be engaged on the flat portion of the stationary primary contacts and not on the leading radius.

**6.14 How to determine the manufacturing date**

The date code is located in the serial number - see the example:

**Serial no. X X X X X X X X**

The first four characters provide the date information. The first two characters are the year and the next two characters are the month. The last five characters are the production unit identifier.

### 6.15 Troubleshooting chart

Symptom	Inspection	Probable defects
<b>Fails to close</b>		
<ul style="list-style-type: none"> <li>Closing springs not charged</li> </ul>	<ul style="list-style-type: none"> <li>Control circuit</li> </ul>	<ul style="list-style-type: none"> <li>Control power (fuse blown or switch off)</li> <li>Secondary disconnects</li> <li>Motor cut-off switch (poor or burned contacts, lever not operational)</li> <li>Terminals and connectors (poor or burned contacts)</li> <li>Motor (brushes worn or commutator segment open)</li> </ul>
	<ul style="list-style-type: none"> <li>Mechanism</li> </ul>	<ul style="list-style-type: none"> <li>Pawls (slipping or broken)</li> <li>Ratchet wheel (teeth worn or broken)</li> <li>Cam shaft assembly (sluggish or jammed)</li> <li>Oscillator (reset spring off or broken)</li> </ul>
<ul style="list-style-type: none"> <li>Closing spring charged but breaker does not close</li> </ul>	<ul style="list-style-type: none"> <li>No closing sound (close coil does not pick up)</li> </ul>	<ul style="list-style-type: none"> <li>Control power (fuse blown or switch off)</li> <li>Secondary disconnects</li> <li>Anti-pump relay Y relay N. C. (contact open or burned or relay picks up)</li> <li>Close coil (open or burned)</li> <li>Latch check switch (contact open-bad switch or trip bar not reset)</li> <li>Auxiliary switch (B contact open or burned)</li> <li>Motor cut-off (contacts open or burned)</li> <li>Trip coil assembly (clapper fails to reset)</li> </ul>
	<ul style="list-style-type: none"> <li>Closing sound but no close</li> </ul>	<ul style="list-style-type: none"> <li>Pole shaft (not open fully)</li> <li>Trip latch reset spring (damaged or missing)</li> <li>Trip bar-d shaft (fails to remain reset)</li> <li>Trip latch-hatchet (fails to remain reset)</li> <li>Trip floor tripper (fails to remain reset)</li> <li>Close latch (binding)</li> <li>Close latch roller (binding)</li> <li>Trip circuit energized</li> </ul>
<b>Undesirably closes</b>		
	<ul style="list-style-type: none"> <li>Control circuit</li> </ul>	<ul style="list-style-type: none"> <li>Close circuit (CS/C getting shorted)</li> </ul>
	<ul style="list-style-type: none"> <li>Mechanism</li> </ul>	<ul style="list-style-type: none"> <li>Close release latch (fails to reset)</li> <li>Close floor tripper (fails to reset)</li> </ul>
<b>Fails to trip</b>		
<ul style="list-style-type: none"> <li>No trip sound</li> </ul>	<ul style="list-style-type: none"> <li>Control circuit</li> </ul>	<ul style="list-style-type: none"> <li>Control power (fuse blown or switch off)</li> <li>Secondary disconnect</li> <li>Auxiliary switch (A contact not making, poor or burned)</li> <li>Trip coil (burned or open)</li> <li>Terminals and connections (poor or burned or open)</li> </ul>
	<ul style="list-style-type: none"> <li>Trip mechanism</li> </ul>	<ul style="list-style-type: none"> <li>Trip clapper (jammed)</li> </ul>
<ul style="list-style-type: none"> <li>Trip sound but no trip</li> </ul>	<ul style="list-style-type: none"> <li>Trip mechanism</li> </ul>	<ul style="list-style-type: none"> <li>Trip bar, trip latch (jammed)</li> <li>Pole shaft (jammed)</li> <li>Operating rod assembly (broken or pins out)</li> </ul>
	<ul style="list-style-type: none"> <li>Vacuum interrupter (one or more welded)</li> </ul>	
<b>Undesirably trips</b>		
	<ul style="list-style-type: none"> <li>Control circuit</li> </ul>	<ul style="list-style-type: none"> <li>Control Power (CS/T Switch, remains made)</li> </ul>
	<ul style="list-style-type: none"> <li>Mechanism</li> </ul>	<ul style="list-style-type: none"> <li>Trip coil clapper (not resetting)</li> <li>Trip bar or trip latch (poor engagement of mating or worn surfaces)</li> <li>Trip bar reset spring (loss of torque)</li> </ul>

### 6.16 End of life procedures

This circuit breaker design does not contain SF<sub>6</sub>, asbestos, or other hazardous materials that require special handling. On removal from service, the contacts shall be open and the closing spring discharged. The unit can be discarded/destroyed in a similar manner as the switchgear that it is contained within. The breaker raw materials in general are made from copper, steel, aluminum, and plastic.

### 6.17 Failure reporting

It is important to learn the field failures. To aid in this process, it is recommended that IEEE Std C37.10 (section A.1) and the reporting form IEEE Std 1325 be considered for reporting the breaker failure event to EATON.

## 7. Renewal parts





### 7.1 General

In order to minimize production downtime, it is recommended that an adequate quantity of spare parts be carried in stock. The quantity will vary from customer to customer, depending upon the service severity and continuity requirements. Each customer should develop their own stock level based on operating experience. Refer to Tables 35 and 36 for guidance.

### 7.1.1 Ordering instructions








1. Always specify the breaker rating information and shop order number.
2. Describe the item, give the style number, and specify the quantity required.
3. Provide the style number from the interrupter assembly.
4. Specify the voltage for electrical components.
5. Specify the method of shipping desired.
6. Send all orders or correspondence to the nearest Eaton sales office.

**Table 34. Recommended replacement parts for ANSI type VCP-W k=1 rated breakers (see Table 39 for common items not listed here) (continued next page).**






Line no.	Description	Style number	Qty. per breaker	Typical view
		VCP-W K=1		
	<i>Pole Unit Assembly</i>			
1	5/25, 1200 A	81A7040G01	3	 <p>25/32/40 kA 1200/2000 A</p>
2	5/25 SE, 1200 A	81A7041G01		
3	5/25, 2000 A	81A7040G02	3	
4	5/25 SE, 2000 A	81A7041G02		
5	5/25, 3000 A	81A7040G03	3	
6	5/25 SE, 3000 A	81A7041G03		
7	5/32, 1200 A	81A7040G04	3	
8	5/32 SE, 1200 A	81A7041G04		
9	5/32, 2000 A	81A7040G05	3	
10	5/32 SE, 2000 A	81A7041G05		
11	5/32, 3000 A	81A7040G06	3	
12	5/32 SE, 3000 A	81A7041G06		
13	5/40, 1200 A	81A7040G07	3	 <p>50 kA 1200/2000 A</p>
14	5/40 SE, 1200 A	81A7041G07		
15	5/40, 2000 A	81A7040G08	3	
16	5/40 SE, 2000 A	81A7041G08		
17	5/40, 3000 A	81A7040G09	3	
18	5/40 SE, 3000 A	81A7041G09		
19	5/50, 1200 A	81A7040G10	3	 <p>3000 A</p>
20	5/50 SE, 1200 A	81A7041G10		
21	5/50, 2000 A	81A7040G11	3	
22	5/50 SE, 2000 A	81A7041G11		
23	5/50, 3000 A	81A7040G12	3	
24	5/50 SE, 3000 A	81A7041G12		
25	50/63, 1200 A	8297A29H31	3	
26	50/63, 2000 A	8297A30H31	3	
27	50/63, 3000 A	8297A31H31	3	









**Table 34. Recommended replacement parts for ANSI type VCP-W k=1 rated breakers (see Table 39 for common items not listed here) (continued next page).**

Line no.	Description	Style number	Qty. per breaker	Typical view	
		VCP-W K=1			
28	8/40, 1200 A	81A7040G13	3	 <p>25/32/40 kA 1200/2000 A</p>	
29	8/40 SE, 1200 A	81A7041G13			
30	8/40, 2000 A	81A7040G14	3		
31	8/40 SE, 2000 A	81A7041G14			
32	8/40, 3000 A	81A7040G15	3		
33	8/40 SE, 3000 A	81A7041G15			
34	8/50, 1200 A	81A7040G16	3		 <p>50 kA 1200/2000 A</p>
35	8/50 SE, 1200 A	81A7041G16			
36	8/50, 2000 A	81A7040G17	3		
37	8/50 SE, 2000 A	81A7041G17			
38	8/50, 3000 A	81A7040G18	3		
39	8/50 SE, 3000 A	81A7041G18			
40	15/25, 1200 A	81A7040G19	3	 <p>3000 A</p>	
41	15/25 SE 1200 A	81A7041G19			
42	15/25, 2000 A	81A7040G20	3		
43	15/25 SE 2000 A	81A7041G20			
44	15/25, 3000 A	81A7040G21	3		
45	15/25 SE, 3000 A	81A7041G21			
46	15/32, 1200 A	81A7040G22	3		
47	5/32 SE, 1200 A	81A7041G22			
48	15/32, 2000 A	81A7040G23	3		
49	15/32 SE, 2000 A	81A7041G23			
50	15/32, 3000 A	81A7040G24	3		
51	15/32 SE, 3000 A	81A7041G24			
52	15/40, 1200 A	81A7040G25	3		
53	15/40 SE, 1200 A	81A7041G25			
54	15/40, 2000 A	81A7040G26	3		
55	15/40 SE, 2000 A	81A7041G26			
56	15/40, 3000 A	81A7040G27	3		
57	15/40 SE, 3000 A	81A7041G27			
58	15/50, 1200 A	81A7040G28	3		
59	15/50 SE, 1200 A	81A7041G28			
60	15/50, 2000 A	81A7040G29	3		
61	15/50 SE, 2000 A	81A7041G29			
62	15/50, 3000 A	81A7040G30	3		
63	15/50 SE, 3000 A	81A7041G30			
64	150/63, 1200 A	8297A29H31	3		
65	150/63, 2000 A	8297A30H31	3		
66	150/63, 3000 A	8297A31H31	3		



**Table 34. Recommended replacement parts for ANSI type VCP-W k=1 rated breakers (see Table 39 for common items not listed here) (continued next page).**

Line no.	Description	Style number	Qty. per breaker	Typical view
		VCP-W K=1		
	<i>Primary disconnects</i>			
67	Up to 50 kA 1200 A & 2000 A	508B022G01	6	
68	All 63 kA All 3000 A	692C037G01	6	
	<i>Vacuum interrupter kits</i>			
69	25 kA, 1200 A	81A7042G01	3	
70	25 kA, 2000 A	81A7042G02	3	
71	25 kA, 3000 A	81A7042G03	3	
72	32 kA, 1200 A	81A7042G04	3	
73	32 kA, 2000 A	81A7042G05	3	
74	32 kA, 3000 A	81A7042G06	3	
75	40 kA, 1200 A	81A7042G07	3	
76	40 kA, 2000 A	81A7042G08	3	
77	40 kA, 3000 A	81A7042G09	3	
78	50 kA, 1200 A	81A7042G10	3	
79	50 kA, 2000 A	81A7042G11	3	
80	50 kA, 3000 A	81A7042G12	3	
	<i>Drive rods</i>			
81	25/40 kA (red spring)	83C7011G01	3	
82	25/40 kA SE (red spring)	83C7011G03		
83	50 kA (black spring)	83C7011G02		
84	50 kA SE (black spring)	83C7011G04		
85	All 63 kA	1c94385G01	3	




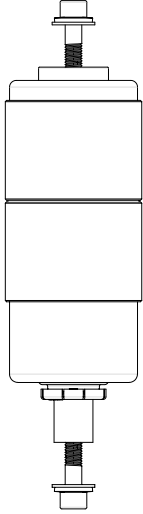
**Table 34. Recommended replacement parts for ANSI type VCP-W k=1 rated breakers (see Table 39 for common items not listed here) .**

Line no.	Description	Style number	Qty. per breaker	Typical view
		VCP-W K=1		
	<u>Tie bars</u>			
86 87	25/40 kA 25/40 kA SE	82B4017H01 82B4017H11	6	
88 89	50 kA 50 kA SE	82B4017H04 82B4017H14	6	
90	All 63 kA	1c94404H01	6	
	<u>Front cover (blank)</u>			
91 92	25/40 kA 1200/2000 A 50 kA & all 3000 A	691C192H03 691C655H01	1 1	
	<u>Front cover label kit</u>			
93	Front cover label kit	81A7043G01	1	
	<u>Phase barrier</u>			
94	All 63 kA	691c648G02		
	<u>Wire harness (complete replacement)</u>			
95 96	Std. & UV UV w/shunt trip 2	691C281G07 691C281G08	1 1	
	<u>Wire harness repair kit</u>			
97	Wire harness repair kit (Replaces secondary disconnect only)	691C28G01	1	






**Table 35. Recommended replacement parts for ANSI type VCP-W MVA rated breakers (see Table 39 for common items not listed here) (continued next page).**

Line no.	Description	Style number	Qty. per breaker	Typical view
		VCP-W MVA rated		
	<i>Pole unit assembly</i>			
1	5/250, 1200 A	81A7040G07	3	 <p>5/250 8/500 15/500 15/750 25/32/40 kA, 1200/2000 A</p>
2	5/250 SE 1200 A	81A7041G07		
3	5/250, 2000 A	81A7040G08		
4	5/250 SE 2000 A	81A7041G08		
5	5/250, 3000 A	81A7040G09	3	
6	5/250 SE, 3000 A	81A7041G09		
7	5/350, 1200 A	81A7040G10	3	
8	5/350 SE, 1200 A	81A7041G10		
9	5/350, 2000 A	81A7040G11	3	
10	5/350 SE, 2000 A	81A7041G11		
11	5/350, 3000 A	81A7040G12	3	
12	5/350 SE, 3000 A	81A7041G12		
13	8/500, 1200 A	81A7040G13	3	
14	8/500 SE, 1200 A	81A7041G13		
15	8/500, 2000 A	81A7040G14	3	
16	8/500 SE, 2000 A	81A7041G14		
17	8/500, 3000 A	81A7040G15	3	
18	8/500 SE, 3000 A	81A7041G15		
19	15/500, 1200 A	81A7040G19	3	
20	15/500 SE, 1200 A	81A7041G19		
21	15/500, 2000 A	81A7040G20	3	
22	15/500 SE, 2000 A	81A7041G20		
23	15/500, 3000 A	81A7040G21	3	
24	15/500 SE, 3000 A	81A7041G21		
25	15/750, 1200 A	81A7040G25	3	
26	15/750 SE, 1200 A	81A7041G25		
27	15/750, 2000 A	81A7040G26	3	
28	15/750 SE, 2000 A	81A7041G26		
29	15/750, 3000 A	81A7040G27	3	
30	15/750 SE, 3000 A	81A7041G27		
31	15/1000, 1200 A	81A7040G28	3	
32	15/1000 SE, 1200 A	81A7041G28		
33	15/1000, 2000 A	81A7040G29	3	
34	15/1000 SE, 2000 A	81A7041G29		
35	15/1000, 3000 A	81A7040G30	3	
36	15/1000 SE, 3000 A	81A7041G30		
37	50VCPW-ND 250	8297A02H03	3	 <p>All 3000 A</p>





**Table 35. Recommended replacement parts for ANSI type VCP-W MVA rated breakers (see Table 39 for common items not listed here) (continued next page).**

Line no.	Description	Style number	Qty. per breaker	Typical view
		VCP-W MVA rated		
	<i>Primary Disconnects</i>			
38	1200 A & 2000 A (except VCPW-ND)	508B022G01	6	
39	50VCPW-ND 250	502A851G02		
40	All 3000 A	692C037G01	6	
	<i>Vacuum interrupter kits</i>			
41	5/250 1200 A	81A7042G07	3	
42	5/250 2000 A	81A7042G08	3	
43	5/250 3000 A	81A7042G09	3	
44	5/350 1200 A	81A7042G10	3	
45	5/350 2000 A	81A7042G11	3	
46	5/350 3000 A	81A7042G12	3	
47	8/500 1200 A	81A7042G07	3	
48	8/500 2000 A	81A7042G08	3	
49	8/500 3000 A	81A7042G09	3	
50	15/500 1200 A	81A7042G01	3	
51	15/500 2000 A	81A7042G02	3	
52	15/500 3000 A	81A7042G03	3	
53	15/750 1200 A	81A7042G07	3	
54	15/750 2000 A	81A7042G08	3	
55	15/750 3000 A	81A7042G09	3	
56	15/1000 1200 A	81A7042G10	3	
57	15/1000 2000 A	81A7042G11	3	
58	15/1000 3000 A	81A7042G12	3	






**Table 35. Recommended replacement parts for ANSI type VCP-W MVA rated breakers (see Table 39 for common items not listed here) (continued next page).**

Line no.	Description	Style number	Qty. per breaker	Typical view
		VCP-W MVA rated		
	<i>Drive rods</i>			
59	(Red spring) 5/250 8/500 15/500 15/750	83C7011G01	3	
60	(Red spring) 5/250 SE 8/500 SE 15/500 SE 15/750 SE	83C7011G03	3	
61	(Black spring) 5/350 15/1000	83C7011G02	3	
62	(Black spring) 5/350 SE 15/1000 SE	83C7011G04	3	
63	50VCPW-ND 250	692C799G01	3	
	<i>Tie bars</i>			
63	5/250 8/500 15/500 15/750	82B4017H01	3	
64	5/250 SE 8/500 SE 15/500 SE 15/750 SE	82B4017H11	3	
65	5/350 15/1000	82B4017H04	3	
66	5/350 SE 15/1000 SE	82B4017H14	3	
67	50VCPW-ND 250	3619A09H01	3	

**Table 35. Recommended replacement parts for ANSI type VCP-W MVA rated breakers (see Table 39 for common items not listed here).**



Line no.	Description	Style number	Qty. per breaker	Typical view
		VCP-W MVA rated		
	<i>Front cover (blank)</i>			
68	(1200/2000 A) 5/250, 5/250 SE 8/500, 8/500 SE 15/500, 15/500 SE 15/750, 15/750 SE	691C192H03	1	
69	(1200/2000 A) 5/350, 5/350 SE 15/1000, 15/1000 SE All 3000 A	691C655H01	1	
	<i>Front cover label kit</i>			
70	Front cover label kit	81A7043G01	1	
	<i>Pole unit assembly</i>			
71	50VCPW-ND 250	8297A02H03	3	
	<i>Wire harness (complete replacement)</i>			
72	Std. & UV	691C281G07	1	
73	UV w/shunt trip 2	691C281G08	1	
	<i>Wire harness repair kit</i>			
74	Wire harness repair kit (replaces secondary disconnect only)	691C28G01	1	
	<i>Phase barrier kit (4 barriers per kit)</i>			
75	50VCPW-ND 250	694C622G03	1	

**Table 36. Recommended replacement parts for ANSI type VCP-W 27 kV rated breakers (see Table 39 for common items not listed here) (continued next page).**





Line no.	Description	Style number	Qty. per breaker	Typical view
		VCP-W K=1		
<i>Pole unit assembly</i>				
1	270/16/22/25-630A-37 kA	8299A04H01	3	
2	270/16/22/25-1200A-37 kA	8299A05H01	3	
3	270/16/22/25-2000A-37 kA	8299A02H01	3	
4	270/32, 1200A-50 kA	8299A05H21	3	
5	270/32 2000A-50 kA	8299A02H21	3	
6	270/40, 1200A-64 kA	8299A05H31	3	
7	270/40, 2000 A64 kA	8299A02H31	3	
<i>Primary disconnects</i>				
8	27 kV, 630-1200 A	699B352G01	6	
9	27 kV, 2000 A	502A852G02	6	
<i>Phase barrier kits</i>				
10	27 kV	691C218H01	2	
<i>Drive rods</i>				
11	27 kV (blue spring)	691C241G01	3	
12	27 kV (black spring)	1C94715G01		
<i>Tie bars</i>				
13	27 kV (up to 25 kA)	691C223H01	6	
14	27 kV (31.5/40 kA)	1C94707H01		








**Table 36. Recommended replacement parts for ANSI type VCP-W 27 kV rated breakers (see Table 39 for common items not listed here).**

Line no.	Description	Style number	Qty. per breaker	Typical view								
		VCP-W K=1										
	<i>Front cover (blank)</i>											
15	All 27 kV	691C214H01	1									
	<i>Label kit (front cover)</i>											
16	<table border="0"> <tr> <td>Labels in kit</td> <td>Qty.</td> </tr> <tr> <td>Breaker latch</td> <td>1</td> </tr> <tr> <td>Front cover - Eaton ONLY</td> <td>1</td> </tr> <tr> <td>Warning notice read instructions</td> <td>1</td> </tr> </table>	Labels in kit	Qty.	Breaker latch	1	Front cover - Eaton ONLY	1	Warning notice read instructions	1	8295A45G04	1	
Labels in kit	Qty.											
Breaker latch	1											
Front cover - Eaton ONLY	1											
Warning notice read instructions	1											
	<i>Wire harness (complete replacement)</i>											
17	Std. & UV	691C281G05	1									
18	UV w/shunt trip 2	691C281G06	1									
	<i>Wiring harness repair kit</i>											
19	Wire harness repair kit (replaces secondary disconnect only)	691C28G01	1									




**Table 37. Recommended replacement parts for ANSI type VCP-WC (Extra Capability) breakers 5-27 kV (see Table 39 for common items not listed here) (continued next page).**

Line no.	Description	Style number	Qty. per breaker	Typical view
		VCP-WC (Extra Capability)		
	<i>Interrupter assembly</i>			
1	50/25C, 1200 A	8297A33H01	3	
2	50/25C, 2000 A	8297A33H02	3	
3	50/25C, 3000 A	8297A33H03	3	
4	50/40C, 1200 A	8297A34H01	3	
5	50/40C, 2000 A	8297A34H02	3	
6	50/40C, 3000 A	8297A34H03	3	
7	50/50C, 1200 A	8297A34H04	3	
8	50/50C, 2000 A	8297A34H05	3	
9	50/50C, 3000 A	8297A34H06	3	
10	50/63C, 1200 A	8297A35H01	3	
11	50/63C, 2000 A	8297A35H02	3	
12	50/63C, 3000 A	8297A35H03	3	
13	75/50C, 1200 A	8297A34H07	3	
14	75/50C, 2000 A	8297A34H08	3	
15	75/50C, 3000 A	8297A34H09	3	
16	150/25C, 1200 A	8297A33H11	3	
17	150/25C, 2000 A	8297A33H12	3	
18	150/25C, 3000 A	8297A33H13	3	
19	150/40C, 1200 A	8297A34H11	3	
20	150/40C, 2000 A	8297A34H12	3	
21	150/40C, 3000 A	8297A34H13	3	
22	150/50C, 1200 A	8297A34H14	3	
23	150/50C, 2000 A	8297A34H15	3	
24	150/50C, 3000 A	8297A34H16	3	
25	150/63C, 1200 A	8297A35H11	3	
26	150/63C, 2000 A	8297A35H12	3	
27	150/63C, 3000 A	8297A35H13	3	
28	270/25C, 1200 A	8297A36H01	3	
29	270/25C, 1600 A	8297A36H02	3	
30	270/32C, 1200 A	8297A36H03	3	
31	270/32C, 1 600 A	8297A36H04	3	
32	270/40C, 1200 A	8297A36H05	3	
33	270/40C, 1600 A	8297A36H06	3	
	<i>Primary disconnects</i>			
34	Up to 15 kV, 1200 A	508B022G01	3	
35	Up to 15 kV, 2000 A	508B012G01	3	







**Table 37. Recommended replacement parts for ANSI type VCP-WC (Extra Capability) breakers 5-27 kV (see Table 39 for common items not listed here) (continued next page).**

Line no.	Description	Style number	Qty. per breaker	Typical view
		VCP-WC (Extra Capability)		
36	Up to 15 kV, 3000 A	692C037G01	6	
37	27 kV, 1200 A	699B352G01	6	
38	27 kV, 2000 A	502A852G02	6	
<i>Phase barrier kits (2 barriers per kit)</i>				
39	15kV inside 2000 A	694C549G03	1	
40	15 kV outside 1200/2000 A	694C549G06	1	
41	27 kV Inside	691C218H01	2	
42	15 kV inside 3000 A	691C648G01	1	
<i>Drive rods</i>				
43	Up to 15 kV - white springs	691C650G01	3	
44	Up to 15 kV - blue springs	691C651G01		
45	Up to 15 kV - red springs	691C651G03		
46	27 kV (blue spring)	691C241G01		
47	27 kV (black spring)	1C94715G01		







**Table 37. Recommended replacement parts for ANSI type VCP-WC (Extra Capability) breakers 5-27 kV (see Table 39 for common items not listed here).**

Line no.	Description	Style number	Qty. per breaker	Typical view
		VCP-WC (Extra Capability)		
<i>Tie bars</i>				
48	Up to 15 kV 50 kA	3619A09H01	6	
49	Up to 15 kV 50 kA SE	691C271H01	6	
50	63 kA only	1C94404H01	6	
51	27 kV (up to 25 kA)	691C223H01	6	
52	27 kV (31.5/40 kA)	1C94707H01		
<i>Front cover (blank)</i>				
53	Up to 15 kV 25/40 kA 1200/2000 A	691C192H03	1	
54	Up to 15 kV 50/63 kA & all 3000 A	691C655H01	1	
55	All 27 kV	691C214H01	1	
<i>Label kit (front cover)</i>				
56	Labels in kit Qty. Breaker latch 1 Front cover - Eaton ONLY 1 Warning notice read instructions 1	8295A45G04	1	
<i>Wire harness (complete replacement)</i>				
57	Std. & UV	691C281G03	1	
58	UV w/shunt trip 2	691C281G04	1	
<i>Wiring harness repair kit</i>				
59	Wire harness repair kit (replaces secondary disconnect only)	691C28G01	1	


**Table 38. Recommended replacement parts for IEC type VCP-W rated breakers (see Table 39 for common items not listed here) (continued next page).**

Line no.	Description	Style number		Qty. per breaker	Typical view
		Up to 17.5 kV	24 kV		
	<i>Interrupter assembly</i>				
1	36/25- 630 A	8299A01H01		3	
2	36/25- 1250 A	8299A01H02		3	
3	36/25- 2000 A	8299A01H03		3	
4	36/32-1250 A	8299A01H04		3	
5	36/32- 2000 A	8299A01H05		3	
6	36/40-1250 A	8299A01H06		3	
7	36/40-2000 A	8299A01H07		3	
8	72/25- 630 A	8299A01H08		3	
9	72/25- 1250 A	8299A01H09		3	
10	72/25- 2000 A	8299A01H10		3	
11	72/32-1250 A	8299A01H11		3	
12	72/32- 2000 A	8299A01H12		3	
13	72/40- 1250 A	8299A01H13		3	
14	72/40- 2000 A	8299A01H14		3	
15	120/25-630 A	8299A01H15		3	
16	120/25-1250 A	8299A01H16		3	
17	120/25-2000 A	8299A01H17		3	
18	120/32-1250 A	8299A01H18		3	
19	120/32-2000 A	8299A01H19		3	
20	<i>Interrupter assembly</i>	8299A01H20		3	
21	120/40-1250 A 120/40-2000 A	8299A01H21		3	
22	175/25-1250 A	8299A01H22		3	
23	175/25-2000 A	8299A01H23		3	
24	175/32-1250 A	8299A01H24		3	
25	175/32-2000 A	8299A01H25		3	
26	175/40-1250 A	8299A01H26		3	
27	175/40-1250 A	8299A01H27		3	
28	240/25-650 A		8299A01H28	3	
29	240/25-1250 A		8299A01H29	3	
30	240/25-2000 A		8299A01H30	3	






**Table 38. Recommended replacement parts for IEC type VCP-W rated breakers (see Table 39 for common items not listed here) (continued next page).**

Line no.	Description	Style number		Qty. per breaker	Typical view
		Up to 17.5 kV	24 kV		
<i>Primary disconnects</i>					
31 32	Up to 175/40-630 A Up to 175/40-1250 A	699B104G01 699B104G01		6 6	
33	Up to 175/40-2000 A	508B012G01		6	
34	240/25-630 A		699B352G01	6	
35 36	240/25-1250 A 240/25-2000 A		699B352G01 699B352G02	6 6	
<i>Phase barriers</i>					
37 38	Up to 175/40 240/25	691C176H04	691C218H01	2 2	
<i>Push rod assemblies</i>					
39 40 41	Up to 175/40-white springs Up to 175/40-blue springs 240/25	691C650G01 691C651G01	691C241G01	3 3 3	

**Table 38. Recommended replacement parts for IEC type VCP-W rated breakers (see Table 39 for common items not listed here).**









Line no.	Description	Style number		Qty. per breaker	Typical view
		Up to 17.5 kV	24 kV		
	<i>Tie bars</i>				
42	Up to 175/40	3619A09H01		6	
43	240/25		691C223H01	6	

**Table 39. Recommended replacement parts for type VCP-W breakers (continued next page).**

Line no.	Description	Style number	Qty. per breaker	Typical view
<i>Charging motor push terminals</i>				
1	48 Vdc (push terminal)	699B196G03	1	
2	125 Vdc / 120 Vac (push terminal)	699B196G01	1	
3	250 Vdc / 240 Vac (push terminal)	699B196G02	1	
4	48 Vdc (ring terminal)	699B196G06	1	
5	125 Vdc / 120 Vac (ring terminal)	699B196G04	1	
6	250 Vdc / 240 Vac (ring terminal)	699B196G05	1	
<i>Motor brush kit</i>				
7	Motor Brush Kit	8063A77G01	1	
<i>Spring release coils</i>				
8	48 Vdc (push terminal)	3759A76G01	1	
9	125 Vdc / 120 Vac (push terminal)	3759A76G02	1	
10	250 Vdc / 240 Vac (push terminal)	3759A76G03	1	
11	48 Vdc (ring terminal)	3759A76G11	1	
12	125 Vdc / 120 Vac (ring terminal)	3759A76G12	1	
13	250 Vdc / 240 Vac (ring terminal)	3759A76G13	1	
<i>Anti pump relay</i>				
14	48 Vdc (push terminal)	3759A74G03	1	
15	125 Vdc (push terminal)	3759A74G04	1	
16	250 Vdc (push terminal)	3759A74G05	1	
17	120 Vac (push terminal)	3759A74G01	1	
18	240 Vac (push terminal)	3759A74G02	1	
19	48 Vdc (ring terminal)	8237A27H03	1	
20	125 Vdc (ring terminal)	8237A27H04	1	
21	250 Vdc (ring terminal)	8237A27H05	1	
22	120 Vac (ring terminal)	8237A27H01	1	
23	240 Vac (ring terminal)	8237A27H02	1	
<i>Rectifier (120/240 Vac)</i>				
24	Rectifier (push terminal)	3759A79G01	1	
25	Rectifier (ring terminal)	3759A79G02	1	



**Table 39. Recommended replacement parts for type VCP-W breakers (continued next page).**

Line no.	Description	Style number	Qty. per breaker	Typical view
	<u>Shunt trip coils</u>			
26	24 Vdc (push terminal)	3759A76G04	1	
27	48 Vdc (push terminal)	3759A76G01	1	
28	125 Vac/125 Vdc (push terminal)	3759A76G02	1	
29	240 Vac/250 Vdc (push terminal)	3759A76G03	1	
30	24 Vdc (ring terminal)	3759A76G14	1	
31	48 Vdc (ring terminal)	3759A76G11	1	
32	125 Vac/125 Vdc (ring terminal)	3759A76G12	1	
33	240 Vac/250 Vdc (ring terminal)	3759A76G13	1	
	<u>UV trip coils</u>			
34	48 Vdc	8064A19G01	1	
35	125 Vdc	8064A19G02	1	
36	250 Vdc	8064A19G03	1	
37	120 Vac	8064A19G09	1	
38	240 Vac	8064A19G10	1	
	<u>Motor cut off switch</u>			
39	Motor cut off switch	699B199G01	1	
	<u>Latch check off switch</u>			
40	Latch check switch	699B199G01	1	
	<u>Position switch</u>			
41	Position switch 1	8064A03G01	1	
42	Position switch 2	3759A93G01	1	
	<u>Auxiliary switch</u>			
43	Auxiliary Switch (push terminal)	698B822H01	1	
44	Auxiliary Switch (ring terminal)	5697B02G01	1	
				(Ring terminal shown)
	<u>Trip D-shaft</u>			
45	Trip D-shaft	694C638G02	1	

**Table 39. Recommended replacement parts for type VCP-W breakers (continued next page).**

Line no.	Description	Style number	Qty. per breaker	Typical view																																												
	<u>Main link &amp; trip latch</u>																																															
46	Main link & trip latch	3A75675G01	1																																													
	<u>Ground contact assembly</u>																																															
47	All except VCPW-ND	691C506G01	1																																													
48	VCPW-ND	691C506G02	1																																													
	<u>Breaker rail wheel (not roll on floor)</u>																																															
49	All Except VCPW-ND	3617A99G01	4																																													
50	VCPW-ND	8237A50H01	4																																													
	<u>Fasteners kit</u>																																															
51	<table border="1"> <thead> <tr> <th>Fasteners in kit</th> <th>Qty.</th> </tr> </thead> <tbody> <tr><td>X-washer - 0.188"</td><td>32</td></tr> <tr><td>X-washer - 0.250"</td><td>14</td></tr> <tr><td>X-washer - 0.312"</td><td>18</td></tr> <tr><td>X-washer - 0.375"</td><td>40</td></tr> <tr><td>X-washer - 0.500"</td><td>18</td></tr> <tr><td>E-ring - 0.250"</td><td>11</td></tr> <tr><td>E-ring - 0.500"</td><td>6</td></tr> <tr><td>C-ring - 0.125"</td><td>6</td></tr> <tr><td>C-ring - 0.375"</td><td>6</td></tr> <tr><td>Envelope</td><td>AR</td></tr> <tr><td>Bag</td><td>1</td></tr> <tr><td>Tag, style number</td><td>1</td></tr> <tr><td>Ret. ring - 0.250"</td><td>5</td></tr> <tr><td>Ret. ring - 0.375"</td><td>5</td></tr> <tr><td>X-washer - 0.625"</td><td>5</td></tr> <tr><td>Spring clip III</td><td>6</td></tr> <tr><td>Ret. ring - 0.188"</td><td>6</td></tr> <tr><td>Gripping - Ret. ring HD</td><td>6</td></tr> <tr><td>Ret. grip ring - 0.375"</td><td>6</td></tr> <tr><td>Fiber washer</td><td>10</td></tr> <tr><td>X-washer 0.500" stainless</td><td>18</td></tr> </tbody> </table>	Fasteners in kit	Qty.	X-washer - 0.188"	32	X-washer - 0.250"	14	X-washer - 0.312"	18	X-washer - 0.375"	40	X-washer - 0.500"	18	E-ring - 0.250"	11	E-ring - 0.500"	6	C-ring - 0.125"	6	C-ring - 0.375"	6	Envelope	AR	Bag	1	Tag, style number	1	Ret. ring - 0.250"	5	Ret. ring - 0.375"	5	X-washer - 0.625"	5	Spring clip III	6	Ret. ring - 0.188"	6	Gripping - Ret. ring HD	6	Ret. grip ring - 0.375"	6	Fiber washer	10	X-washer 0.500" stainless	18	8061A01G01	1	
Fasteners in kit	Qty.																																															
X-washer - 0.188"	32																																															
X-washer - 0.250"	14																																															
X-washer - 0.312"	18																																															
X-washer - 0.375"	40																																															
X-washer - 0.500"	18																																															
E-ring - 0.250"	11																																															
E-ring - 0.500"	6																																															
C-ring - 0.125"	6																																															
C-ring - 0.375"	6																																															
Envelope	AR																																															
Bag	1																																															
Tag, style number	1																																															
Ret. ring - 0.250"	5																																															
Ret. ring - 0.375"	5																																															
X-washer - 0.625"	5																																															
Spring clip III	6																																															
Ret. ring - 0.188"	6																																															
Gripping - Ret. ring HD	6																																															
Ret. grip ring - 0.375"	6																																															
Fiber washer	10																																															
X-washer 0.500" stainless	18																																															
	<u>Reverse color label kit</u>																																															
52	<table border="1"> <thead> <tr> <th>Reverse color labels in kit</th> <th>Qty. per kit</th> </tr> </thead> <tbody> <tr><td>Push to open</td><td>100</td></tr> <tr><td>Push to close</td><td>100</td></tr> <tr><td>Closed</td><td>100</td></tr> <tr><td>Open</td><td>100</td></tr> </tbody> </table>	Reverse color labels in kit	Qty. per kit	Push to open	100	Push to close	100	Closed	100	Open	100	66A5067G01	1																																			
Reverse color labels in kit	Qty. per kit																																															
Push to open	100																																															
Push to close	100																																															
Closed	100																																															
Open	100																																															

**Table 39. Recommended replacement parts for type VCP-W breakers.**

Line no.	Description	Style number	Qty. per breaker	Typical view
	<i>UV trip kit</i>			
53	48 Vdc	691C274G01	1	
54	125 Vdc	691C274G02	1	
55	250 Vdc	691C274G03	1	
37	120 Vac	691C274G04	1	
56	240 Vac	691C274G05	1	
	<i>Closure test</i>			
57	Closure Test	6352C58G01	1	

## 8. Optional accessories

### 8.1 Optional factory installed roll-on-floor wheel kit

#### Eaton (29" wide frame) breakers:

- Rated at 5, 15, or 27 kV - can be ordered with the "optional" factory installed, roll-on-floor wheel kit, as configured through Bidmanager.

**Note:** This roll-on-floor wheel kit can also be ordered as an aftermarket item and installed in the field as required.



**Figure 46. Roll-on-floor wheel kit (shown installed on a standard 5/15 kV VCP-W breaker).**


The center wheel on the 27 kV roll on the floor breaker is rotated 180 degrees from the picture shown above to align better with the center of gravity.

### 8.2 Optional automatic/manual hybrid secondary for BPI pan assembly

Figure 45 represents an automatic engaging secondary with a manual release feature incorporated into the BPI pan assembly. It requires the customer to manually lift up the secondary release lever to allow the secondary harness to engage the breaker in the DISCONNECT/TEST position.

The secondary harness will then disengage automatically when the breaker returns to the DISCONNECT/TEST position.

The slider interlocks from the non-BPI pan assembly: Figure 14 displays the "Z" shaped slider interlock that prevents a closed breaker from being levered out of the cell has been incorporated into this feature.

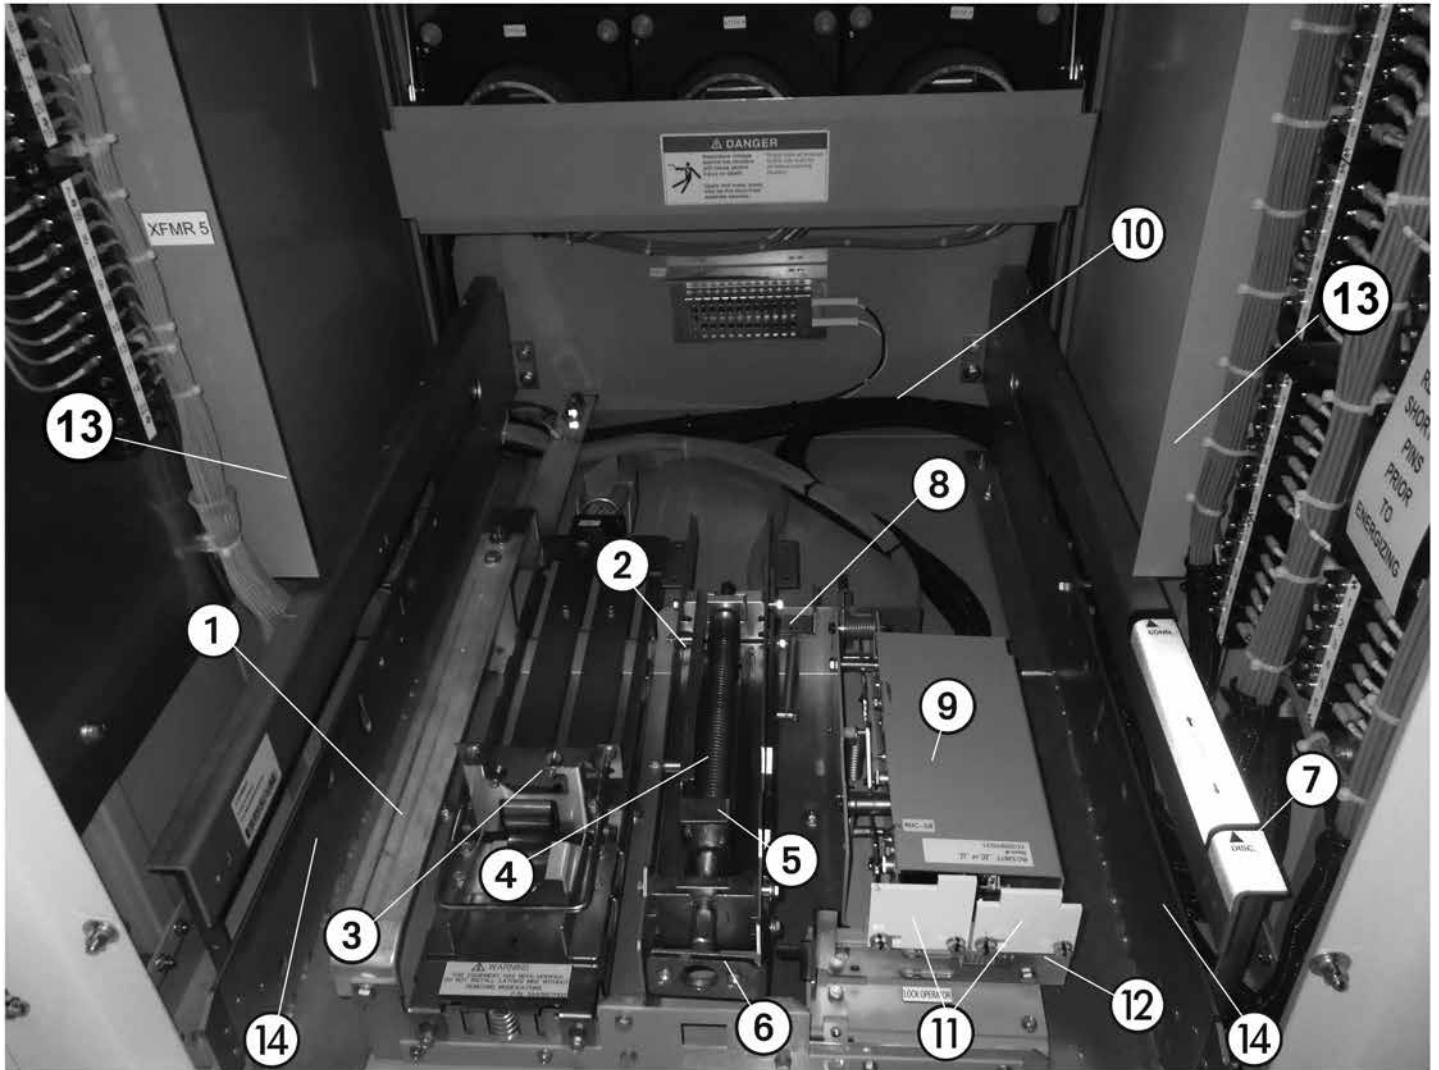

Legend

- |                                |  |
|--------------------------------|--|
| 1. Ground contacts             | 8. Slider interlocks                                   |
| 2. Levering system.            | 9. MOC switch  |
| 3. Automatic/manual secondary  | 10. TOC switch location (see Figure 12 for actual TOC) |
| 4. Racking screw               | 11. Coding plates                                      |
| 5. Moving block                | 12. Provision for padlocking                           |
| 6. Slider                      | 13. Picture frame                                      |
| 7. Breaker position indication | 14. Breaker rail                                       |

**Figure 47. Optional automatic/manual secondary for BPI pan assembly.**

This optional accessory is style number 1C20335G01.

### **8.3 Optional 3,000 A ball screw drive for BPI pan assembly**

A ball screw kit has been developed for the BPI pan assembly to reduce the required force to manually rack in a 63 kA or 3,000 A breaker. If the customer is using a MR2 system to lever in the breakers, then this system is not required.

This optional accessory is style number 1C20376G01.

**Notes:**

**DISCLAIMER OF WARRANTIES AND LIMITATION OF LIABILITY**

The information, recommendations, descriptions and safety notations in this document are based on Eaton Corporation's ("Eaton") experience and judgment and may not cover all contingencies. If further information is required, an Eaton sales office should be consulted. Sale of the product shown in this literature is subject to the terms and conditions outlined in appropriate Eaton selling policies or other contractual agreement between Eaton and the purchaser.

THERE ARE NO UNDERSTANDINGS, AGREEMENTS, WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY, OTHER THAN THOSE SPECIFICALLY SET OUT IN ANY EXISTING CONTRACT BETWEEN THE PARTIES. ANY SUCH CONTRACT STATES THE ENTIRE OBLIGATION OF EATON. THE CONTENTS OF THIS DOCUMENT SHALL NOT BECOME PART OF OR MODIFY ANY CONTRACT BETWEEN THE PARTIES.

In no event will Eaton be responsible to the purchaser or user in contract, in tort (including negligence), strict liability or otherwise for any special, indirect, incidental or consequential damage or loss whatsoever, including but not limited to damage or loss of use of equipment, plant or power system, cost of capital, loss of power, additional expenses in the use of existing power facilities, or claims against the purchaser or user by its customers resulting from the use of the information, recommendations and descriptions contained herein. The information contained in this manual is subject to change without notice.

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com

© 2022 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. IB131029EN / TBG001564  
March 2022