


Installation Instructions for PSG480R24RM REDUNDANCY MODULE

READ INSTRUCTIONS BEFORE INSTALLING OR OPERATING THIS DEVICE. KEEP FOR FUTURE REFERENCE.

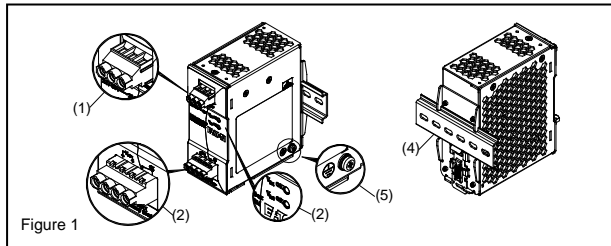

1. Safety instructions

- Switch main power off before connecting or disconnecting the device. Danger of explosion!
- To guarantee sufficient convection cooling, please keep a distance of 50 mm above and below the device as well as a lateral distance of 20 mm to other units.
- Please note, that the enclosure of the device can become very hot depending on the ambient temperature and load of the power supply. Risk of burns!
- The main power must be turned off before connecting or disconnecting wires to the terminals!
- Do not introduce any objects into the unit!
- Dangerous voltage present for at least 5 minutes after disconnecting all sources of power.
- The supply of the unit shall comply with any isolated secondary circuit according to UL 508, Clause 32.
- The unit must be installed in an IP54 enclosure or cabinet in the final installation.
- Warning: Explosion Hazard – Substitution of components may impair suitability for Class I, Division 2.
- Warning: Explosion Hazard – Do not disconnect equipment unless the power has been switched off or the area is known to be non-hazardous.

• **CAUTION:** "FOR USE IN A CONTROLLED ENVIRONMENT".

2. Device description (Fig. 1)

- (1) Input terminal block connector
- (2) Output terminal block connector
- (3) LED indicator of V_{in1} & V_{in2}
- (4) Universal mounting rail system
- (5) Earth connection

3. Mounting (Fig. 2)

The unit can be mounting on 35 mm DIN rails in accordance with EN 60715. The device should be installed with input block on the top.

Each device is delivered ready to install.

Snap on the DIN rail as shown in Fig. 2:

1. Tilt the unit slightly upwards and put it onto the DIN rail.
2. Push downwards until stopped.
3. Press against the bottom front side for locking.
4. Shake the unit slightly to ensure that it is secured.

4. Dismounting (Fig. 3)

To uninstall, pull or slide down the latch as shown in Fig. 3. Then, slide the unit in the opposite direction, release the latch and pull out the unit from the rail.

5. Connection

The terminal block connectors allow easy and fast wiring.

You can use flexible (stranded wire) or solid cables with cross section 3.3-5.3 mm² (AWG 12-10) and torque of 7.3 Kgf-cm max (6.3 lb in). To secure reliable and shock proof connections, the stripping length should be 7 mm (see Fig. 4 (1)). Please ensure that wires are fully inserted into the connecting terminals as shown in Fig. 4 (2).

In accordance to EN 60950 / UL 60950, flexible cables require ferrules.

Use appropriate copper cables that are designed to sustain operating temperature of 60°C / 75°C or more to fulfill UL requirements.






6. Typical application notes (Fig. 5)

1. 1+1 Redundancy: Using 1 more PSU as the redundant unit
2. 1+N Redundancy: Using more PSUs as the redundant units to increase the reliability
3. Single Use: Connecting only one PSU to one PSG480R24RM to reduce the stress of the diodes and hence increase the reliability




Risk of electrical shock, fire, personal injury or death.

- (1) Turn power off before working on the device.
- (2) Make sure of the wiring is correct by following all local and national codes.
- (3) Do not modify or repair the unit.
- (4) Use caution to prevent any foreign objects from entering into the housing.
- (5) Do not use in wet locations.
- (6) Do not use the unit in area where moisture or condensation can be expected.

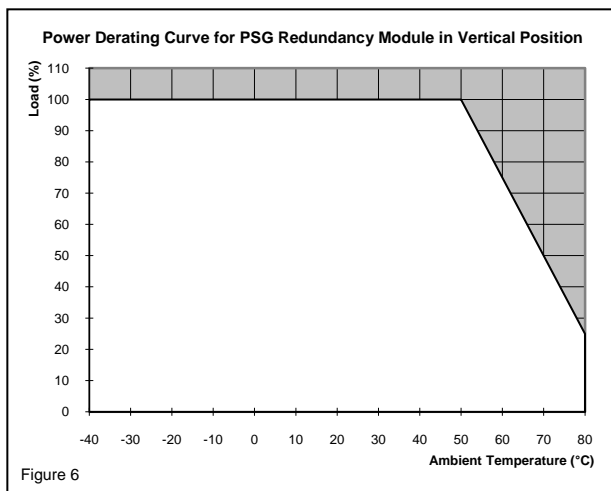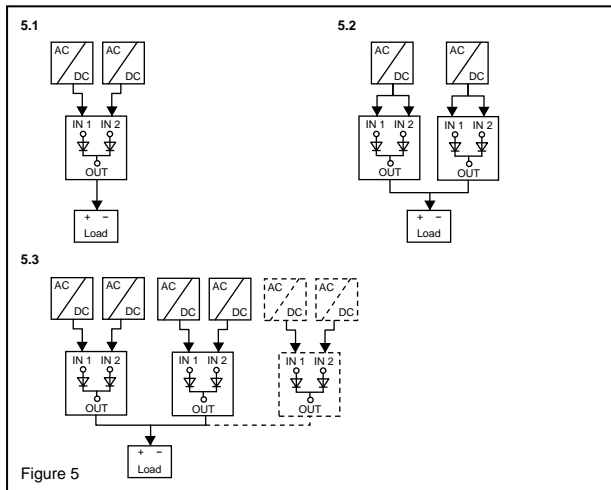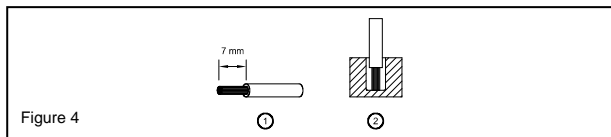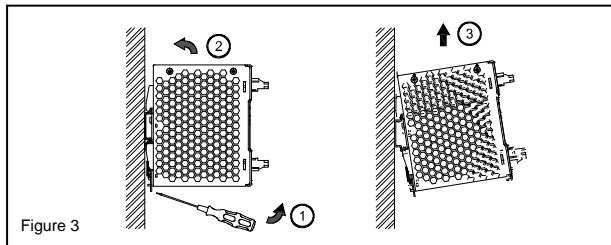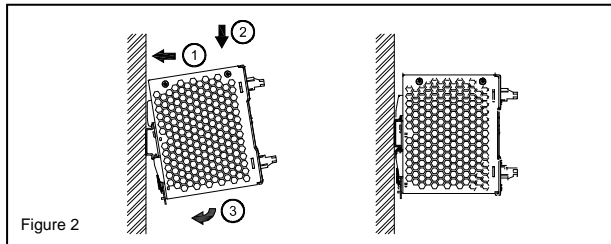

FOR TECHNICAL ASSISTANCE CALL 1 - 877 - ETN - CARE

TECHNICAL DATA FOR PSG480R24RM

| Input (DC) | |
|--|--|
| Nominal input | 24 VDC and 48 VDC |
| Voltage range | 22-60 VDC (For UL 508) |
| Input current | (1+1 Redundancy) = Nom. 2x12.5 Amps, See 5.1 (N+1 Redundancy) = Nom. 2x10 Amps, See 5.3 (Single use) = Nom. 1x20 Amps, See 5.2 |
| Input voltage alarm | 24 V system: both V_{in1} & $V_{in2} > 18V \pm 5\%$ or $< 30 V$ max. 48 V system: both V_{in1} & $V_{in2} > 36V \pm 5\%$ or $< 60 V$ max. |
| Output (DC) | |
| Output voltage | Input - 0.65 V |
| Nominal current | 20A Max. |
| Derating | $> 50^{\circ}\text{C}$ (2.5% / $^{\circ}\text{C}$) |
| Component Derating | $V_{in} = 22-60$ VDC, Max. Load - $T_{\text{ambient}} = 50^{\circ}\text{C}$ - $T_j < 85\%$ of $T_{j\text{max}}$ |
| Voltage drop | 0.65 V |
| Efficiency | $> 97.0\%$ typ. |
| Short circuit | < 25 A, No damage |
| General Data | |
| Type of housing | Aluminum |
| Signals | Green LED V_{in1} & V_{in2} |
| MTBF | $> 800,000$ hrs. Tested @ Max. Load with 25°C ambient and 24 VDC & 48 VDC input |
| Relay contact (max.) | 30 VDC / 1 A |
| Dimensions (L x W x H) | 121 mm x 50 mm x 122 mm |
| Weight | 0.38 kg |
| Connection method | Screw connection |
| Stripping length | 7 mm |
| Operating temperature (surrounding air temperature) | -40°C to $+80^{\circ}\text{C}$ (Refer to Fig. 6) |
| Storage temperature | -40°C to $+85^{\circ}\text{C}$ |
| Humidity at $+25^{\circ}\text{C}$, no condensation | $< 95\%$ RH |
| Vibration (non-operating) | 10 to 500 Hz @ 30 m/s^2 (3 G peak); displacement of 0.35 mm; 60 min. per axis for all X, Y, Z directions in acc. with IEC 60068-2-6 |
| Shock (in all directions) | 30 G (300 m/s^2) in all directions according to IEC 60068-2-27 |
| Altitude (operating) | 2,500 Meters |
| Pollution degree | 2 |
| Certification and Standards | |
| Electrical equipments of machines | IEC 60204-1 |
| Electronic equipment for use in electrical power installations | EN 50178 / IEC 62103 |
| Safety entry low voltage | PELV (EN 60204), SELV (EN 60950) |
| Industrial control equipment | cULus recognized to UL 508 and CSA C22.2 No.107.1-01 |
| Hazardous location | cCSAus to CSA C22.2 No.213-M1987, ANSI / ISA 12.12.01:2007 [Class I, Division 2, Group A,B,C,D T4, $T_a = -40^{\circ}\text{C}$ to $+80^{\circ}\text{C}$ ($> +50^{\circ}\text{C}$ derating)] |
| Protection against electric shock | DIN 57100-410 |
| CE | In conformance with EMC directive 2004/108/EC and low voltage directive 2006/95/EC |
| ITE | EN 55022, EN 61000-3-2, EN 61000-3-3, EN 55024 |
| Industrial | EN 55011 |
| Limitation of mains harmonic currents | EN 61000-3-2 |
|  | |
| RoHS Compliant | Yes |
| Safety and Protection | |
| Isolation voltage: Input & Output / PE | 1.5 kVAC |
| Protection degree | IP20 |
| Safety class | Class III with PE connection |