



Eaton 5PX 1500 for Pf= 0,9 loads (100% = 1500 VA / 1350 W)

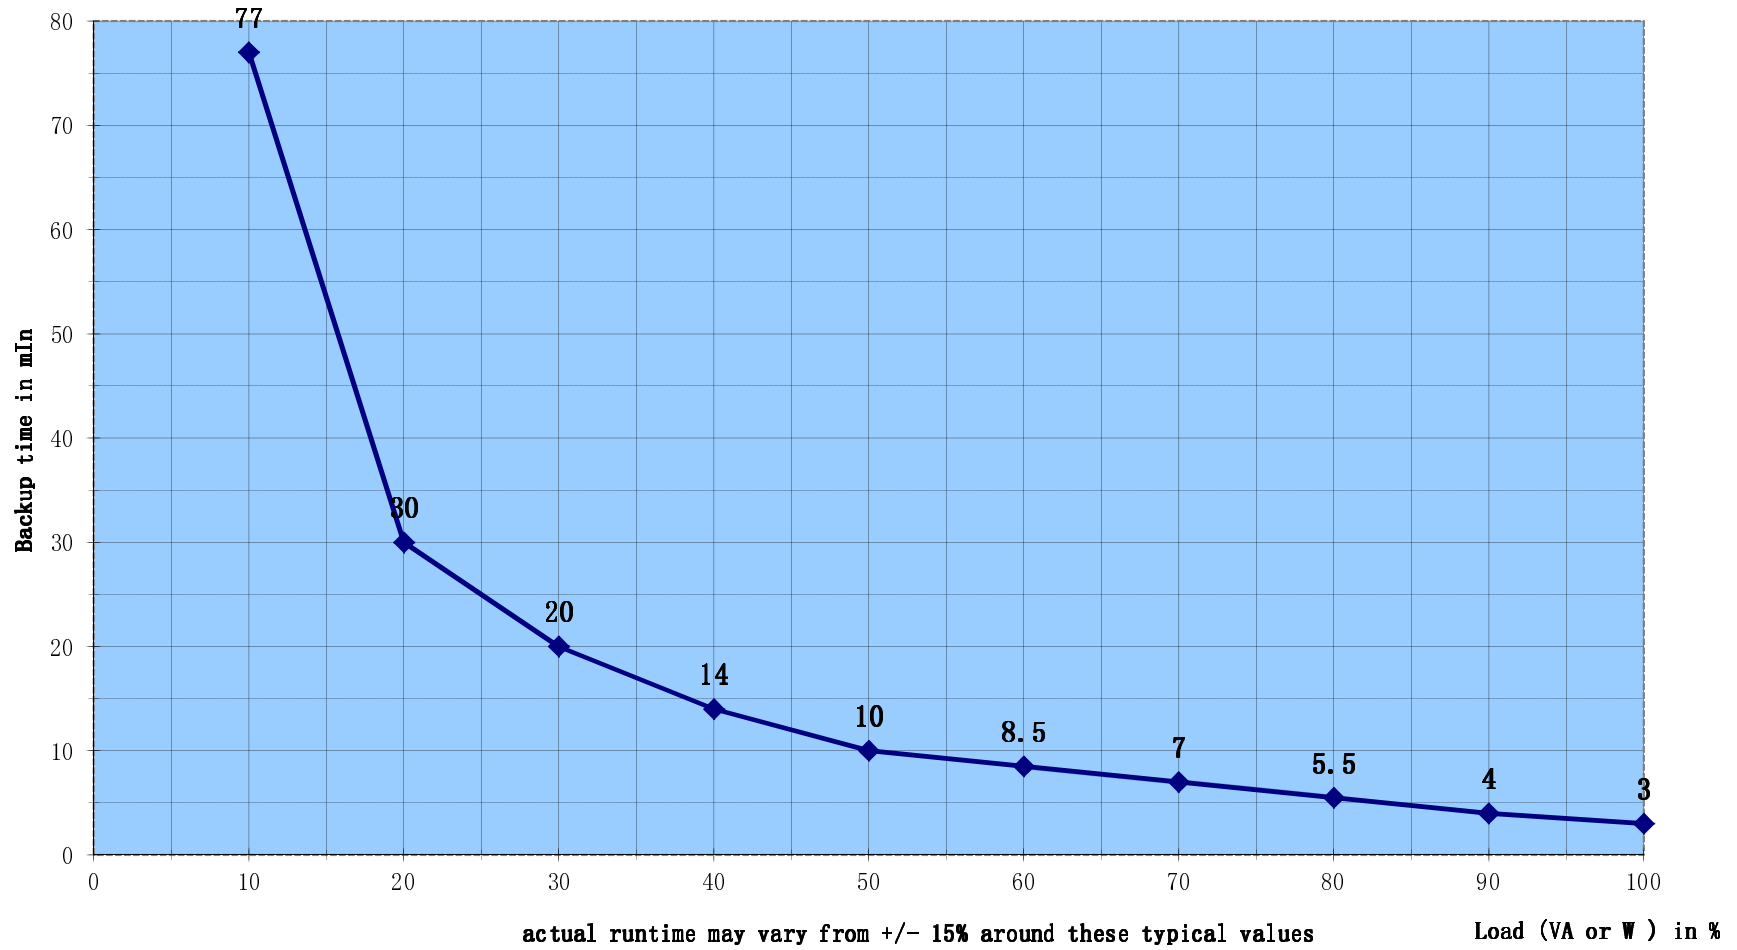


Eaton 5PX 1500 + EBM for Pf= 0,9 loads (100% = 1500 VA / 1350 W)

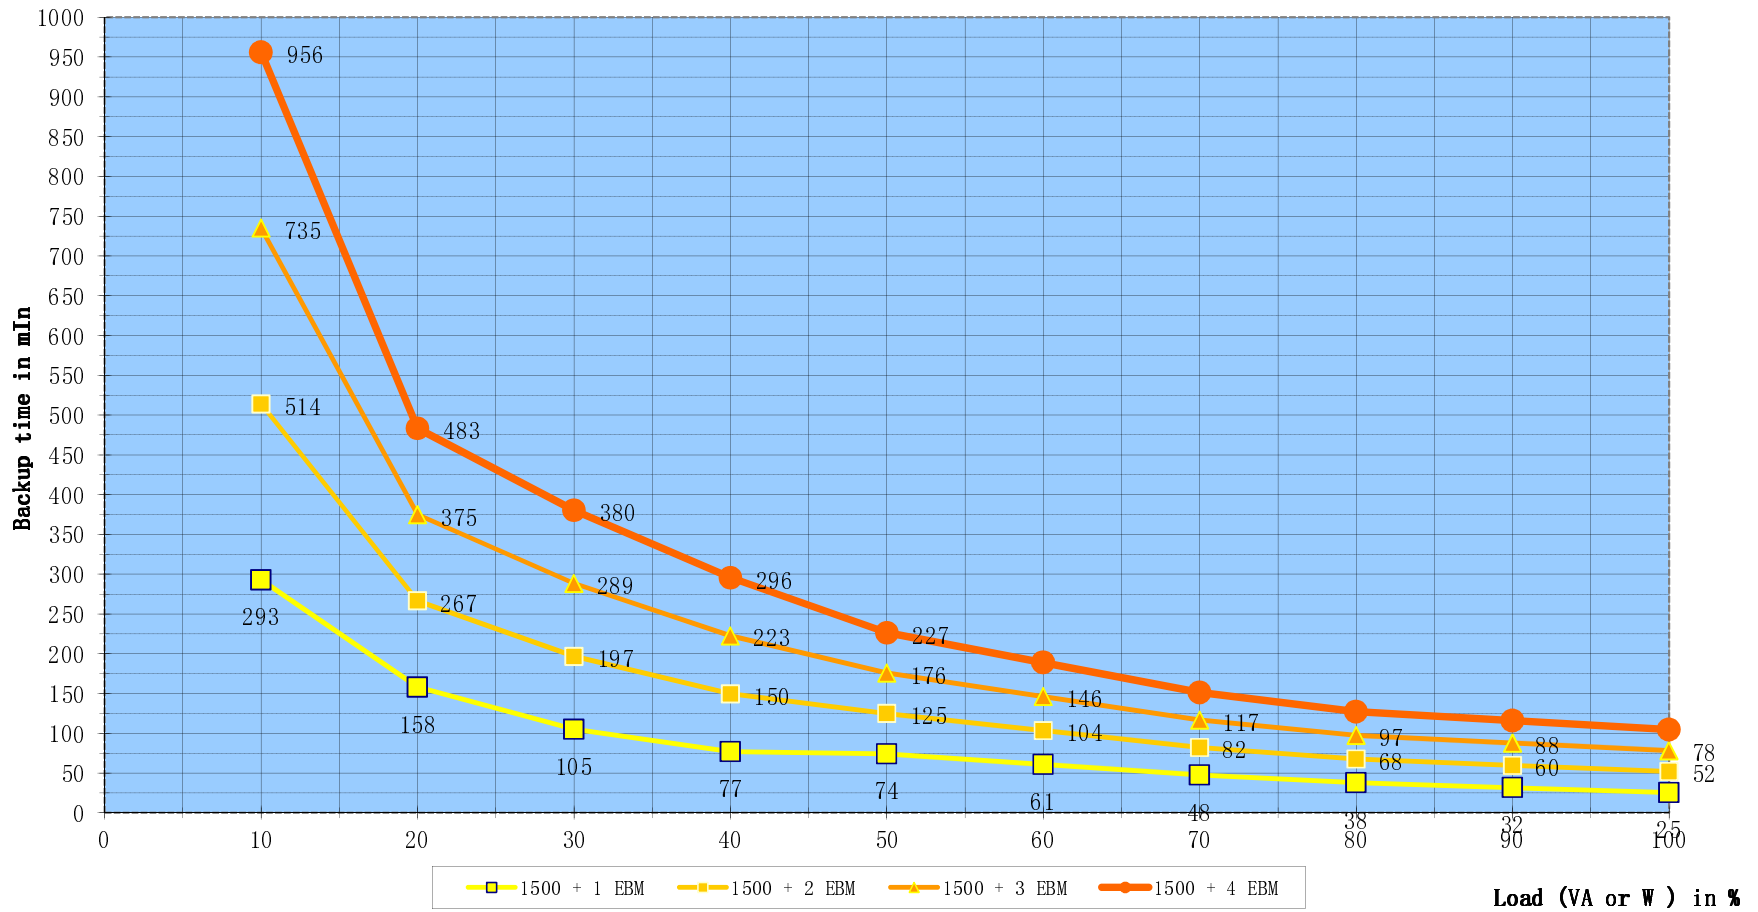


actual runtime may vary from +/- 15% around these typical values

Eaton 5PX 2200 for Pf= 0,9 loads (100% = 2200 VA / 1980 W)

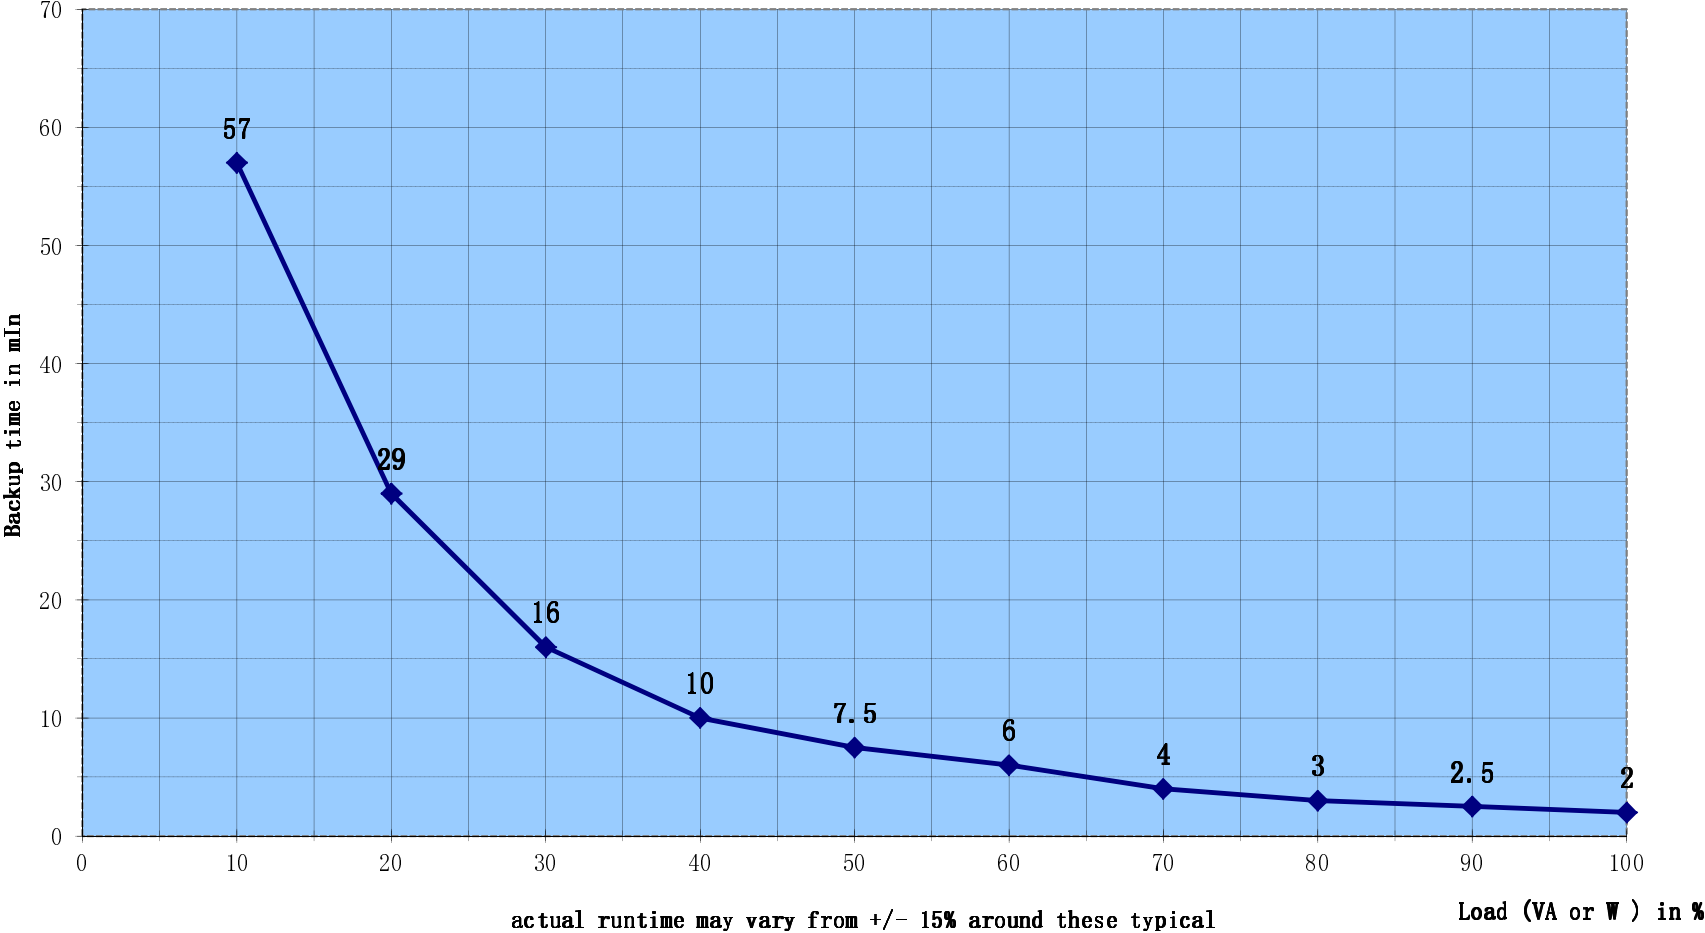


Eaton 5PX 2200 + EBM for Pf= 0,9 loads (100% = 2200 VA / 1980 W)

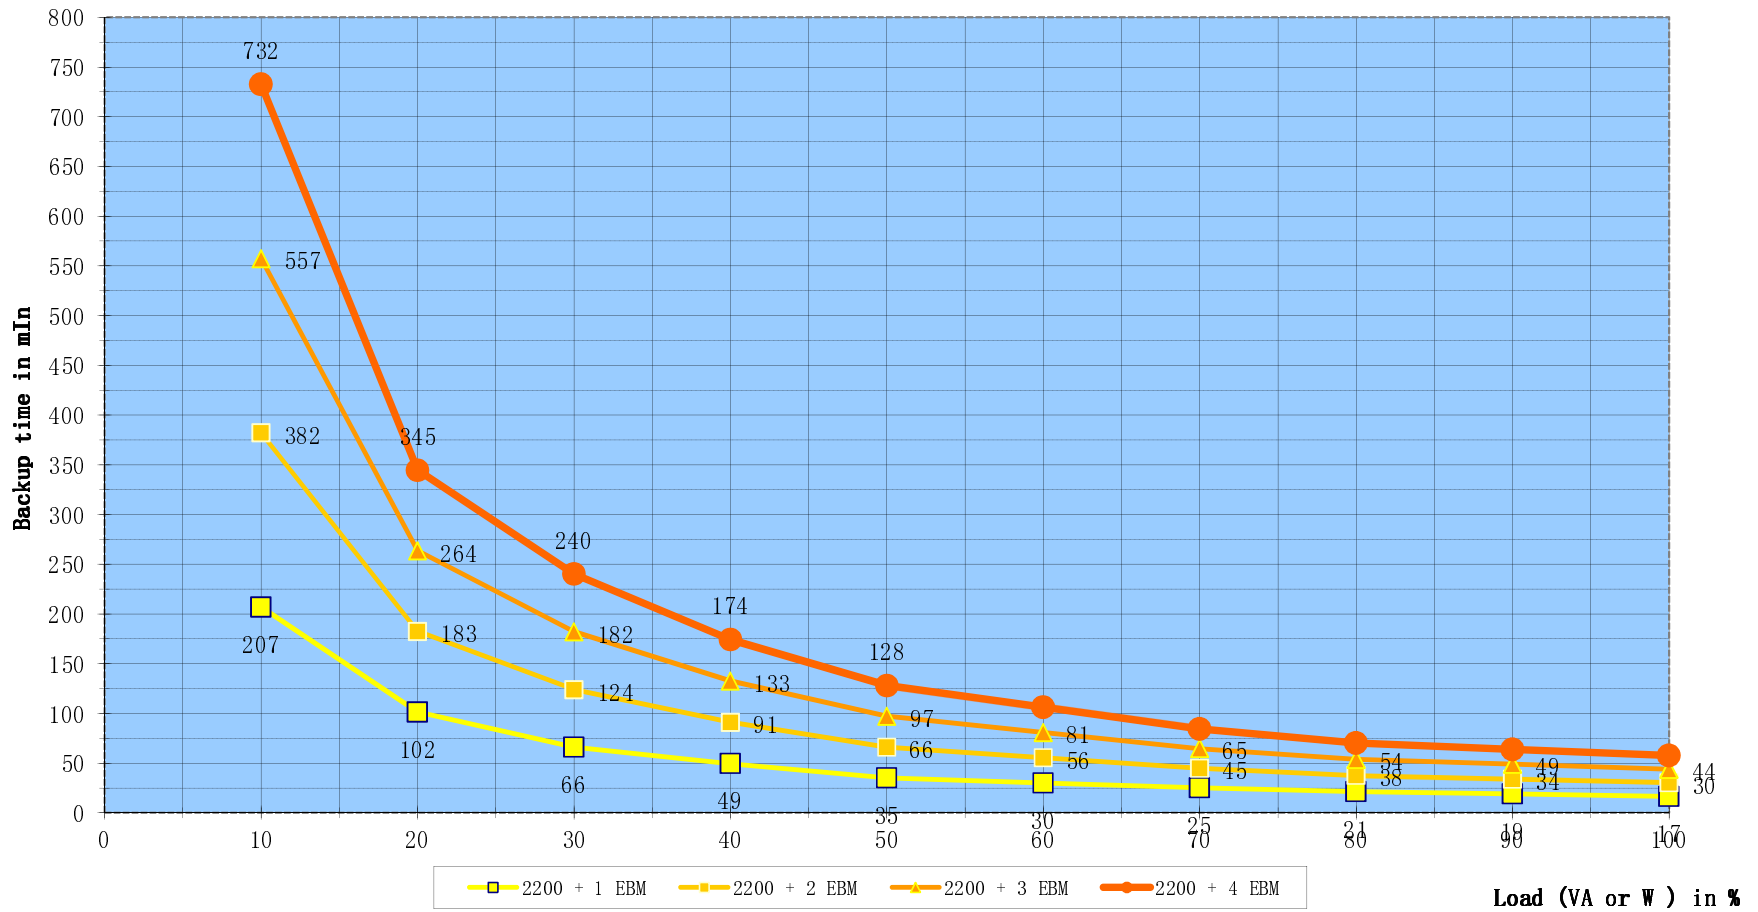


actual runtime may vary from +/- 15% around these typical values

Eaton 5PX 3000 for Pf= 0,9 loads (100% = 3000 VA / 2700 W)

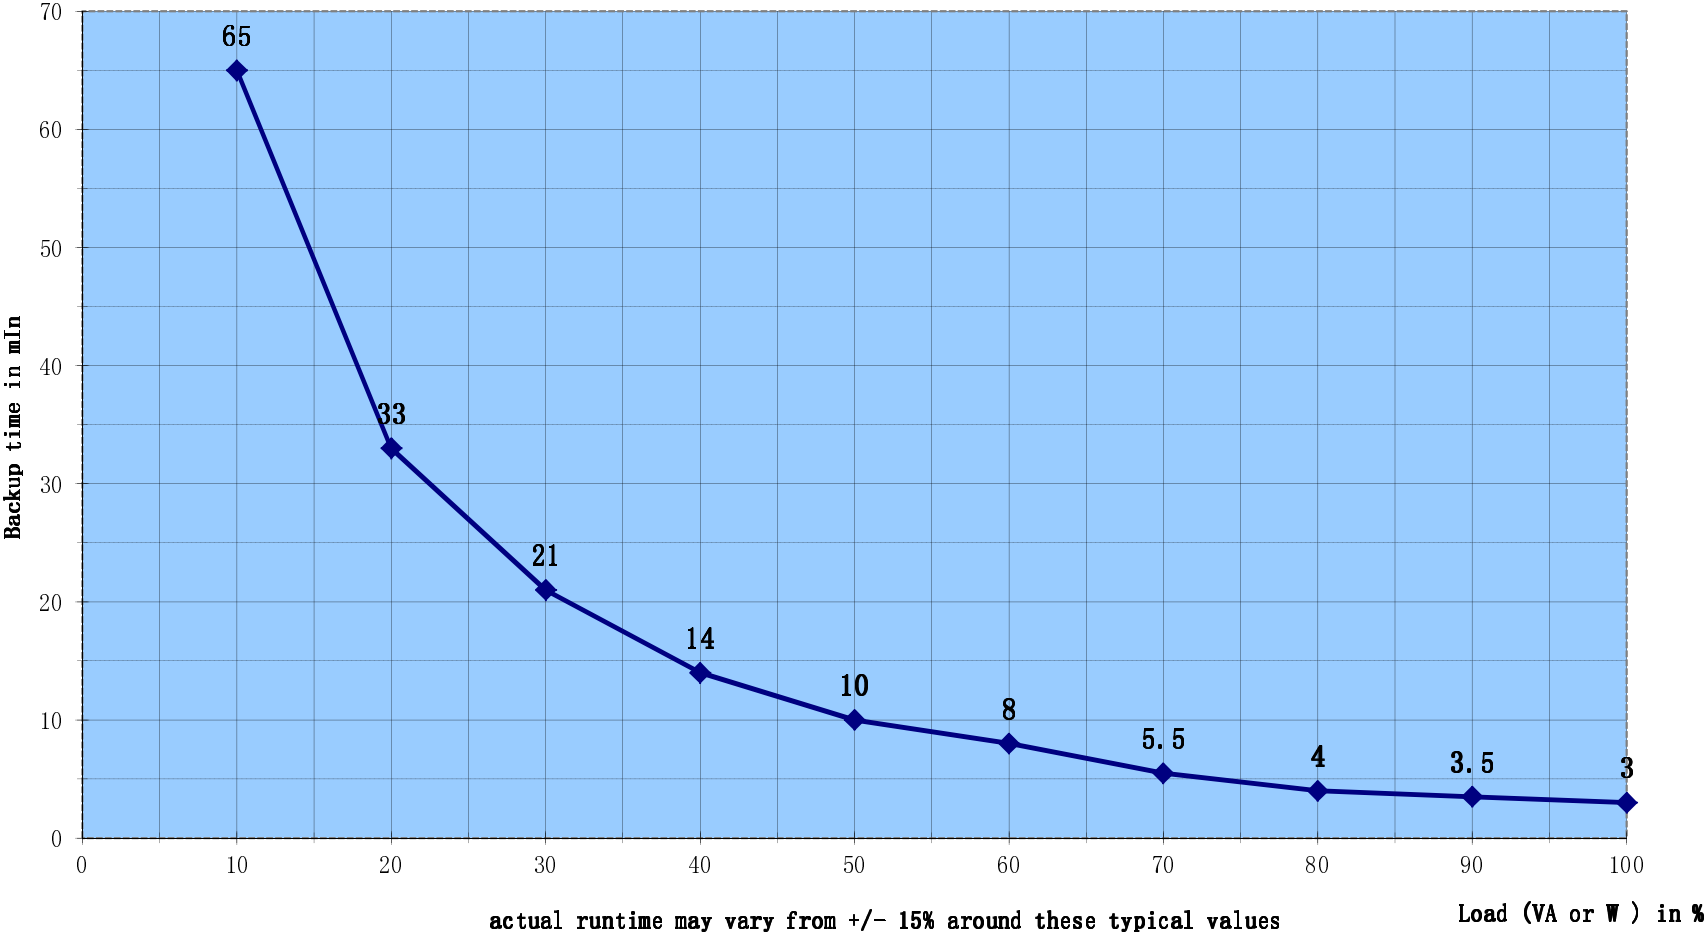

Eaton 5PX 3000 + EBM for Pf= 0,9 loads (100% = 3000 VA / 2700 W)

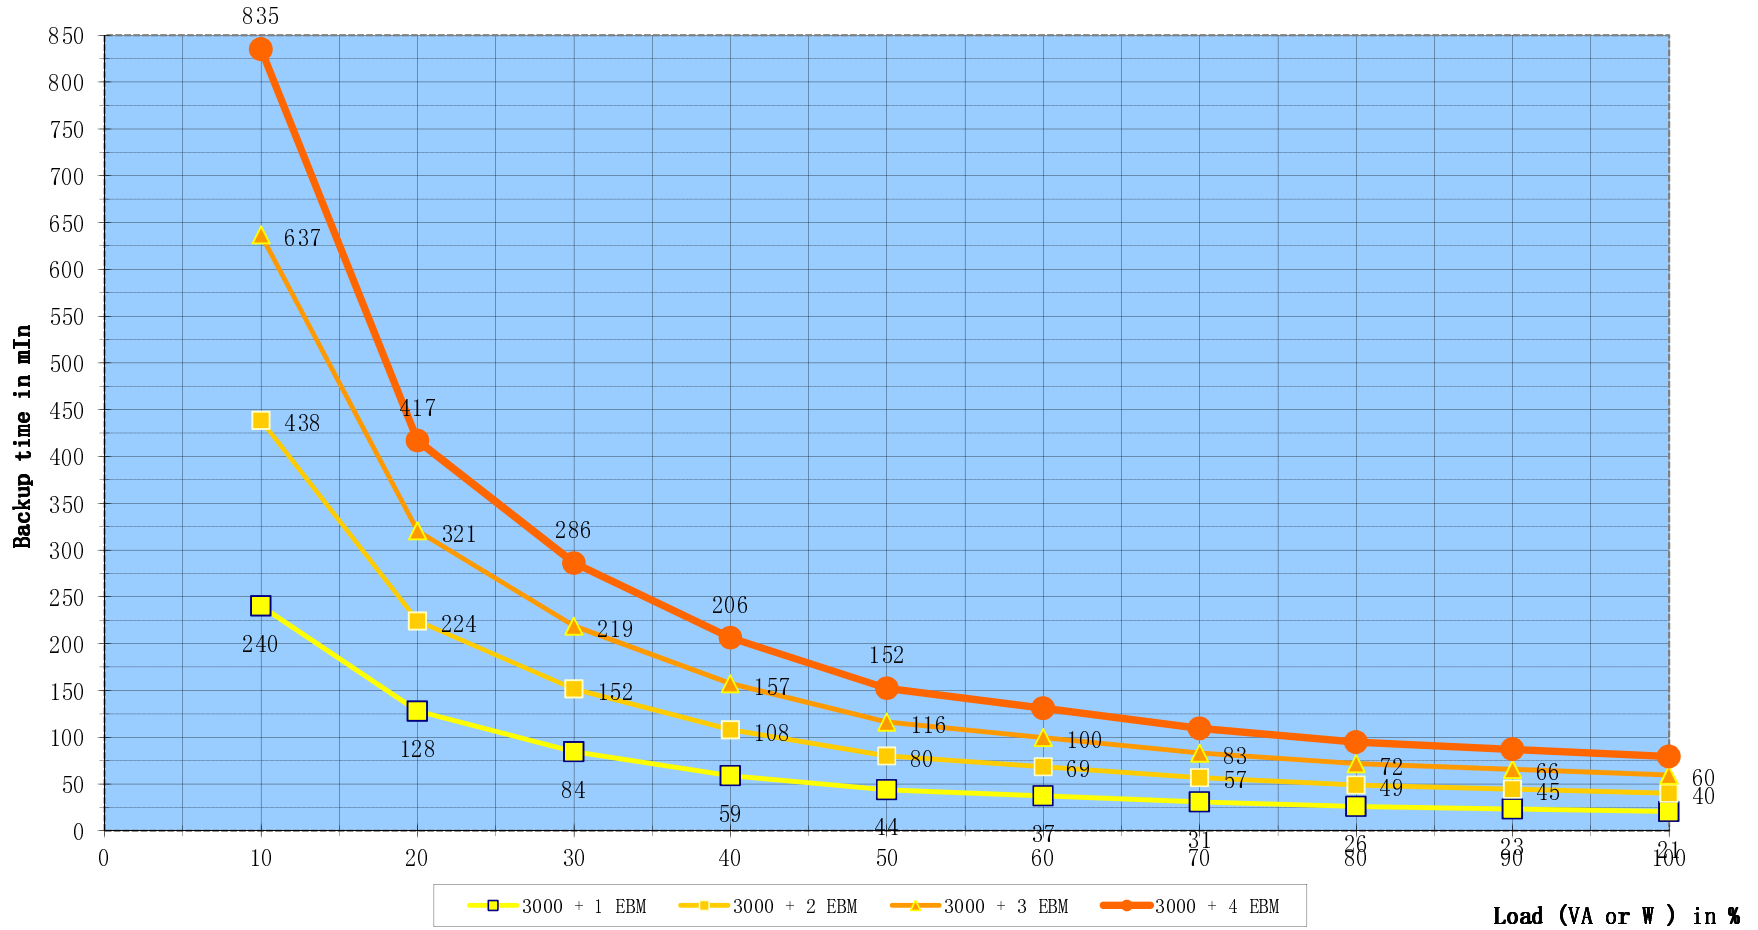

actual runtime may vary from +/- 15% around these typical values