



Eaton 9PX 1000 (100% = 1000 VA / 1000 W)

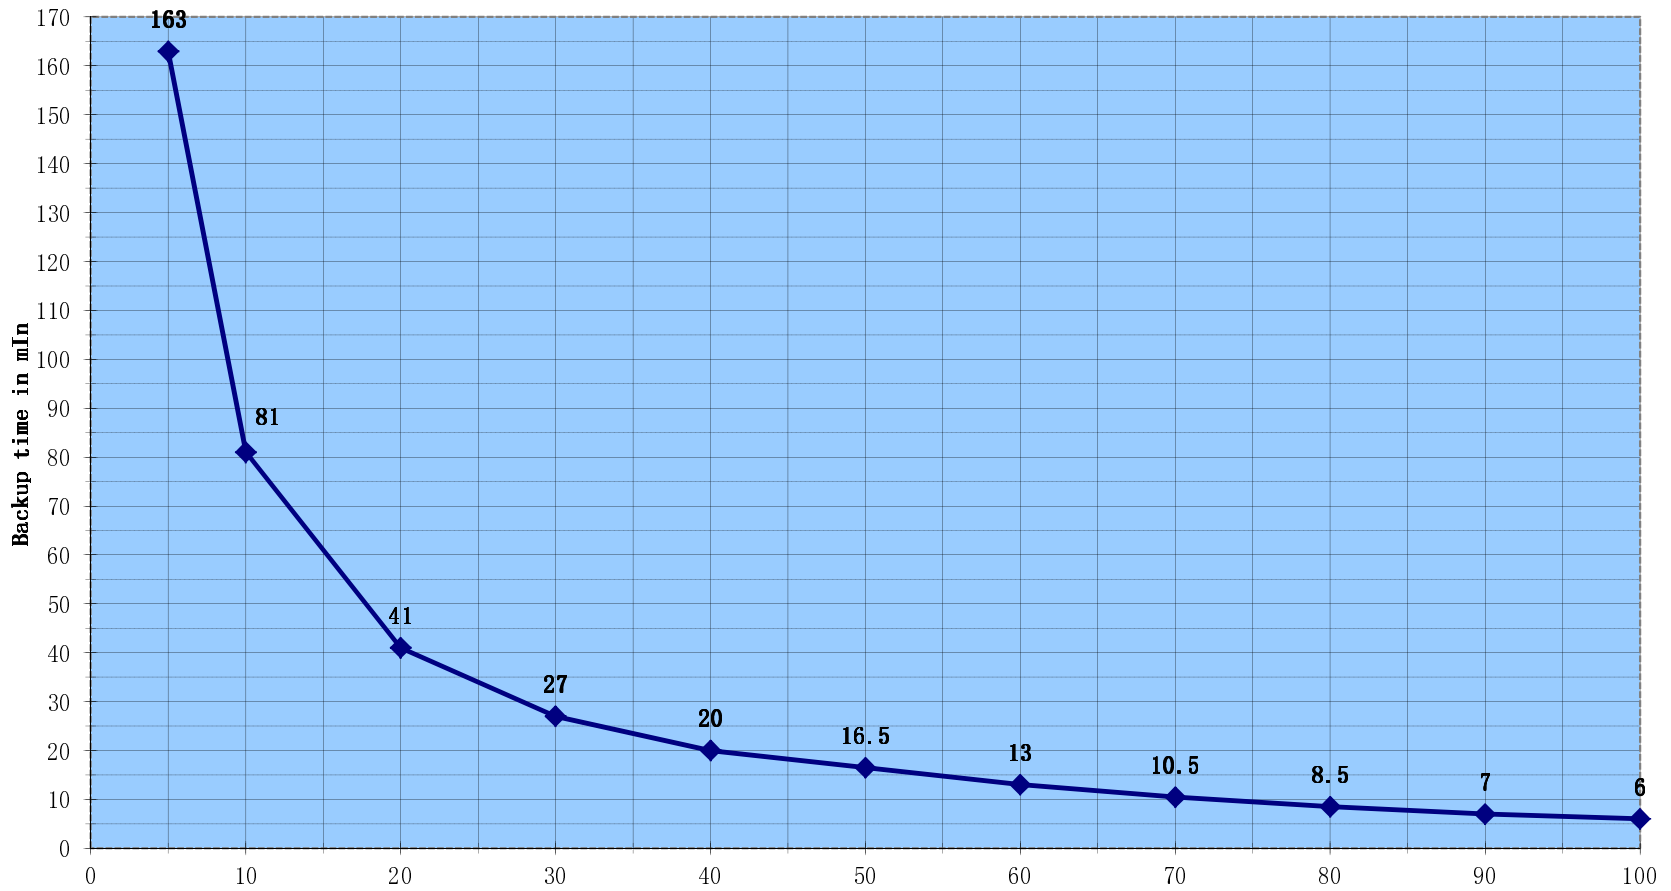

actual runtime may vary from +/- 15% around these typical


Load (VA or W) in %

Eaton 9PX 1000 + EBM (100% = 1000 VA / 1000 W)

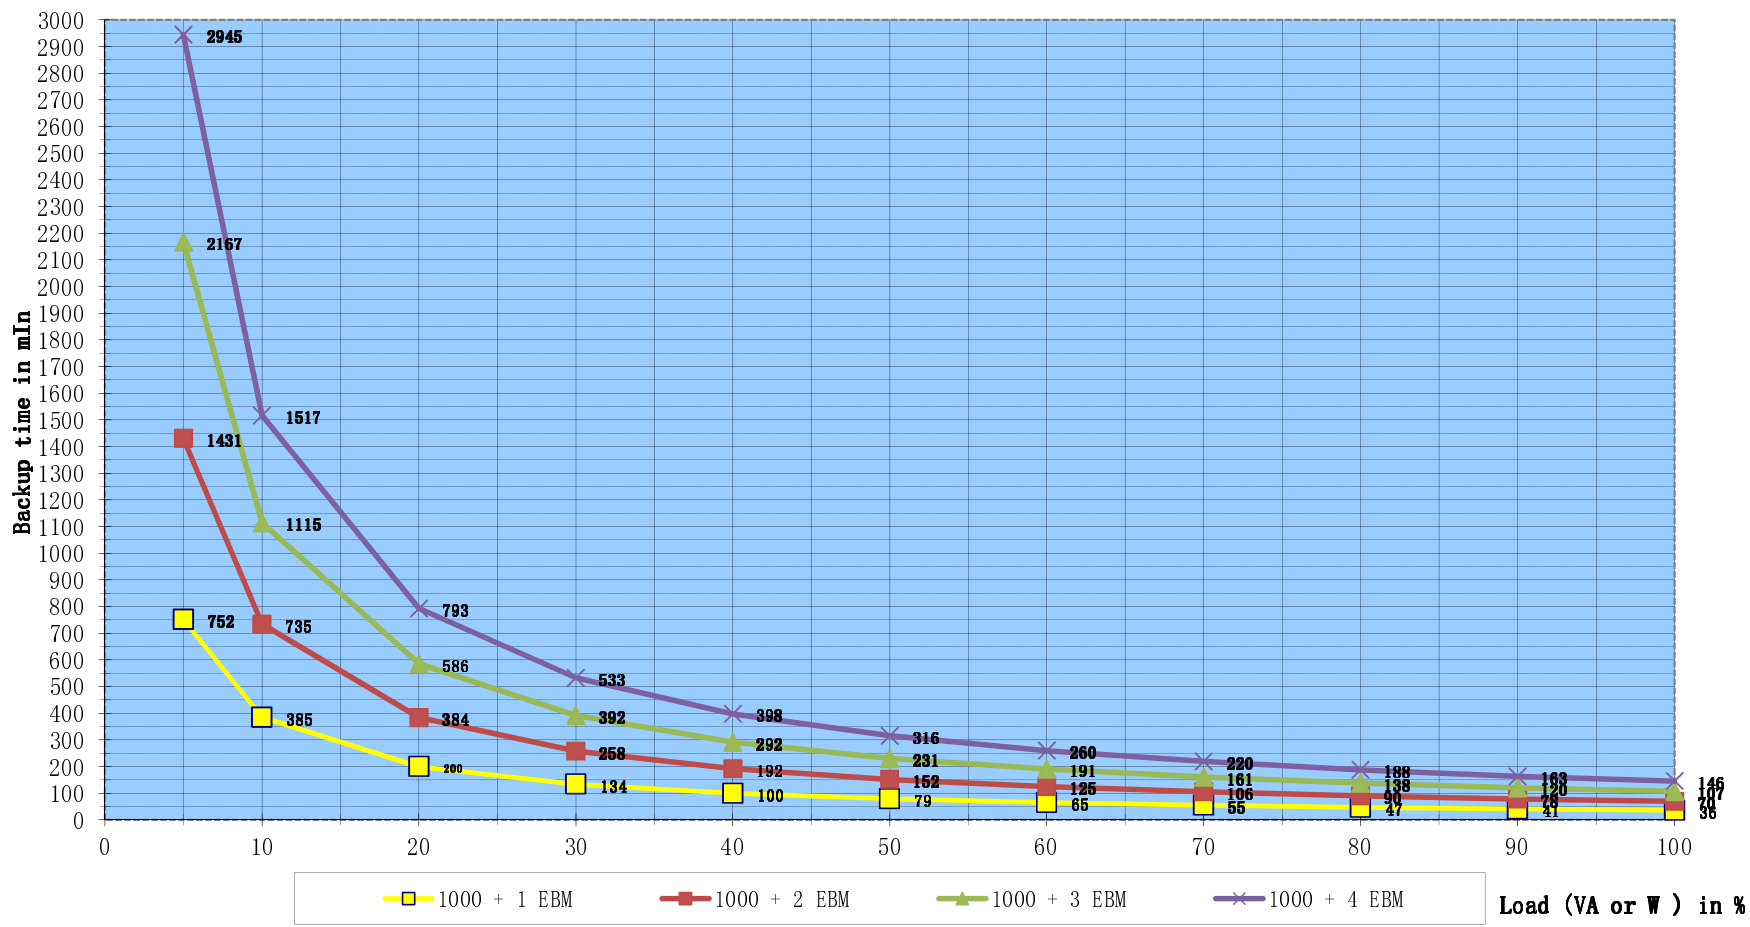


actual runtime may vary from +/- 15% around these typical values

Eaton 9PX 1500 (100% = 1500 VA / 1500 W)

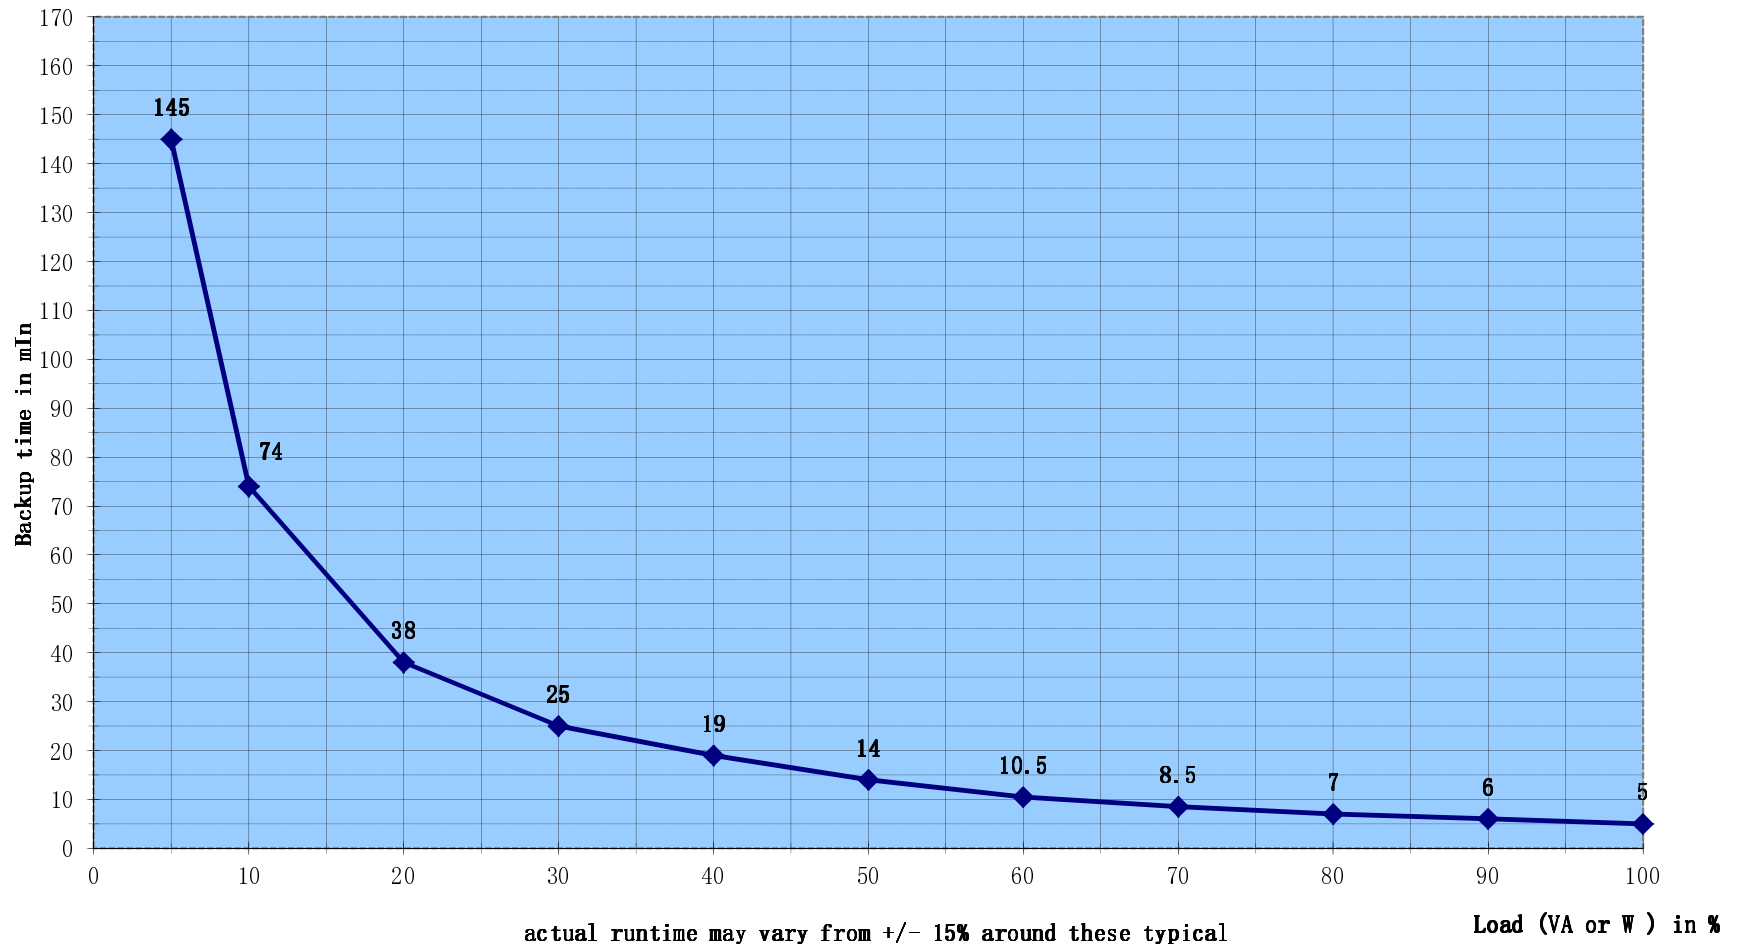


Eaton 9PX 1500 + EBM (100% = 1500 VA / 1500 W)

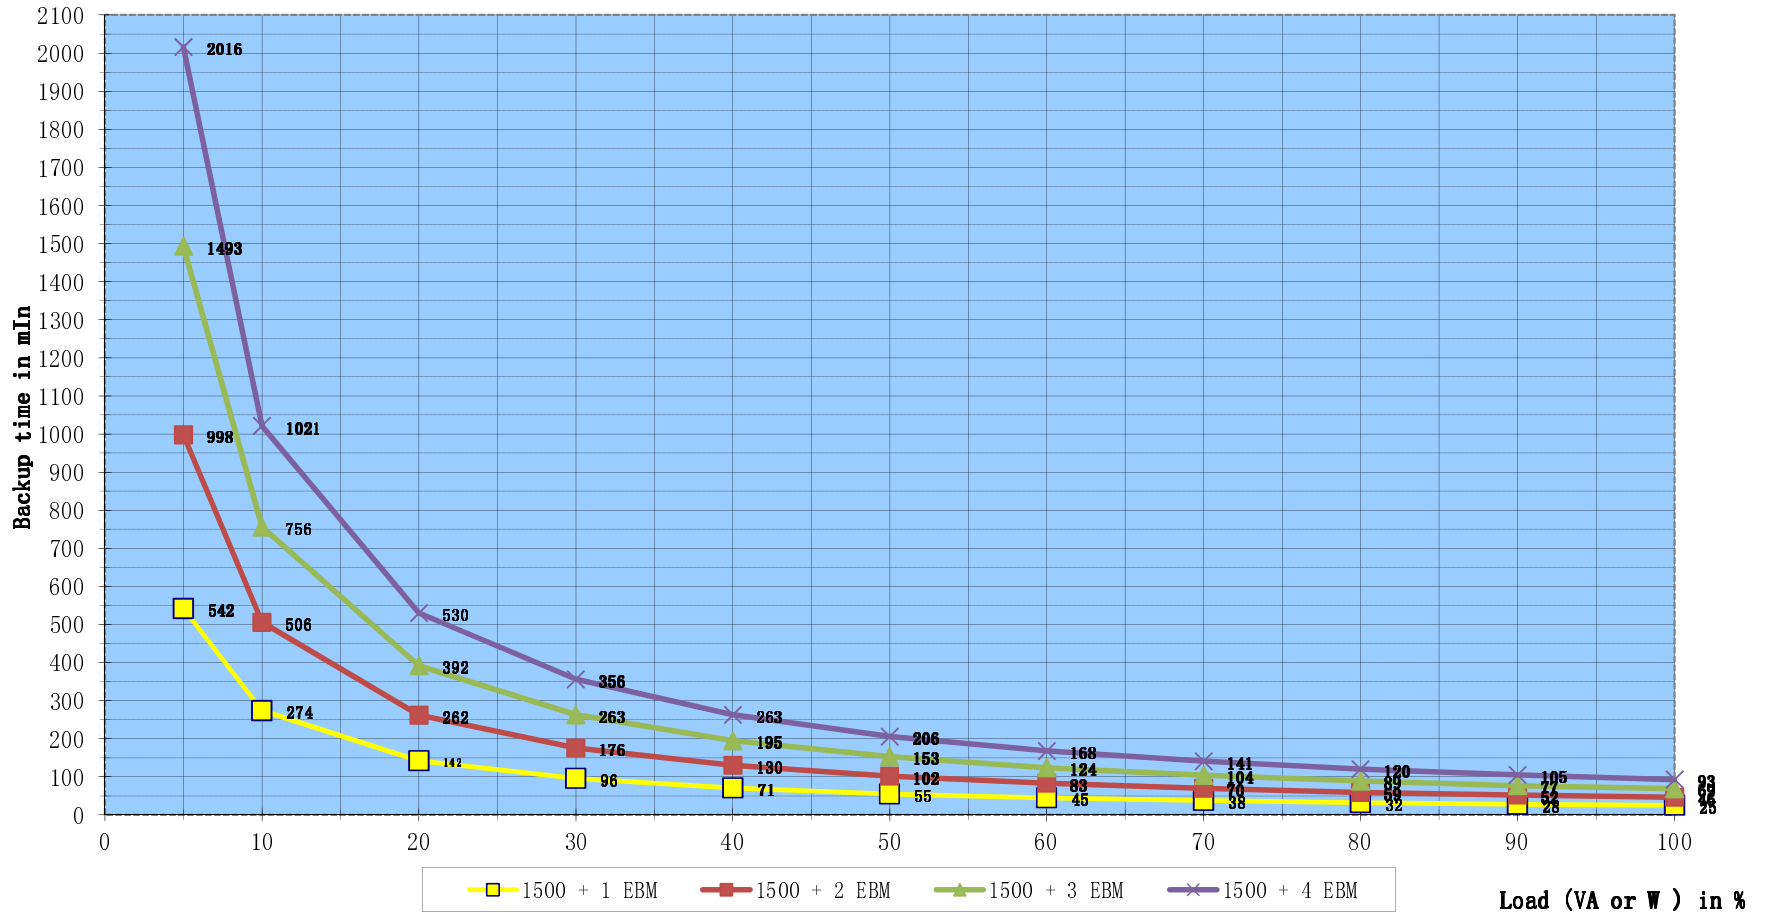


actual runtime may vary from +/- 15% around these typical values

Eaton 9PX 2200 (100% = 2200 VA / 2200 W)

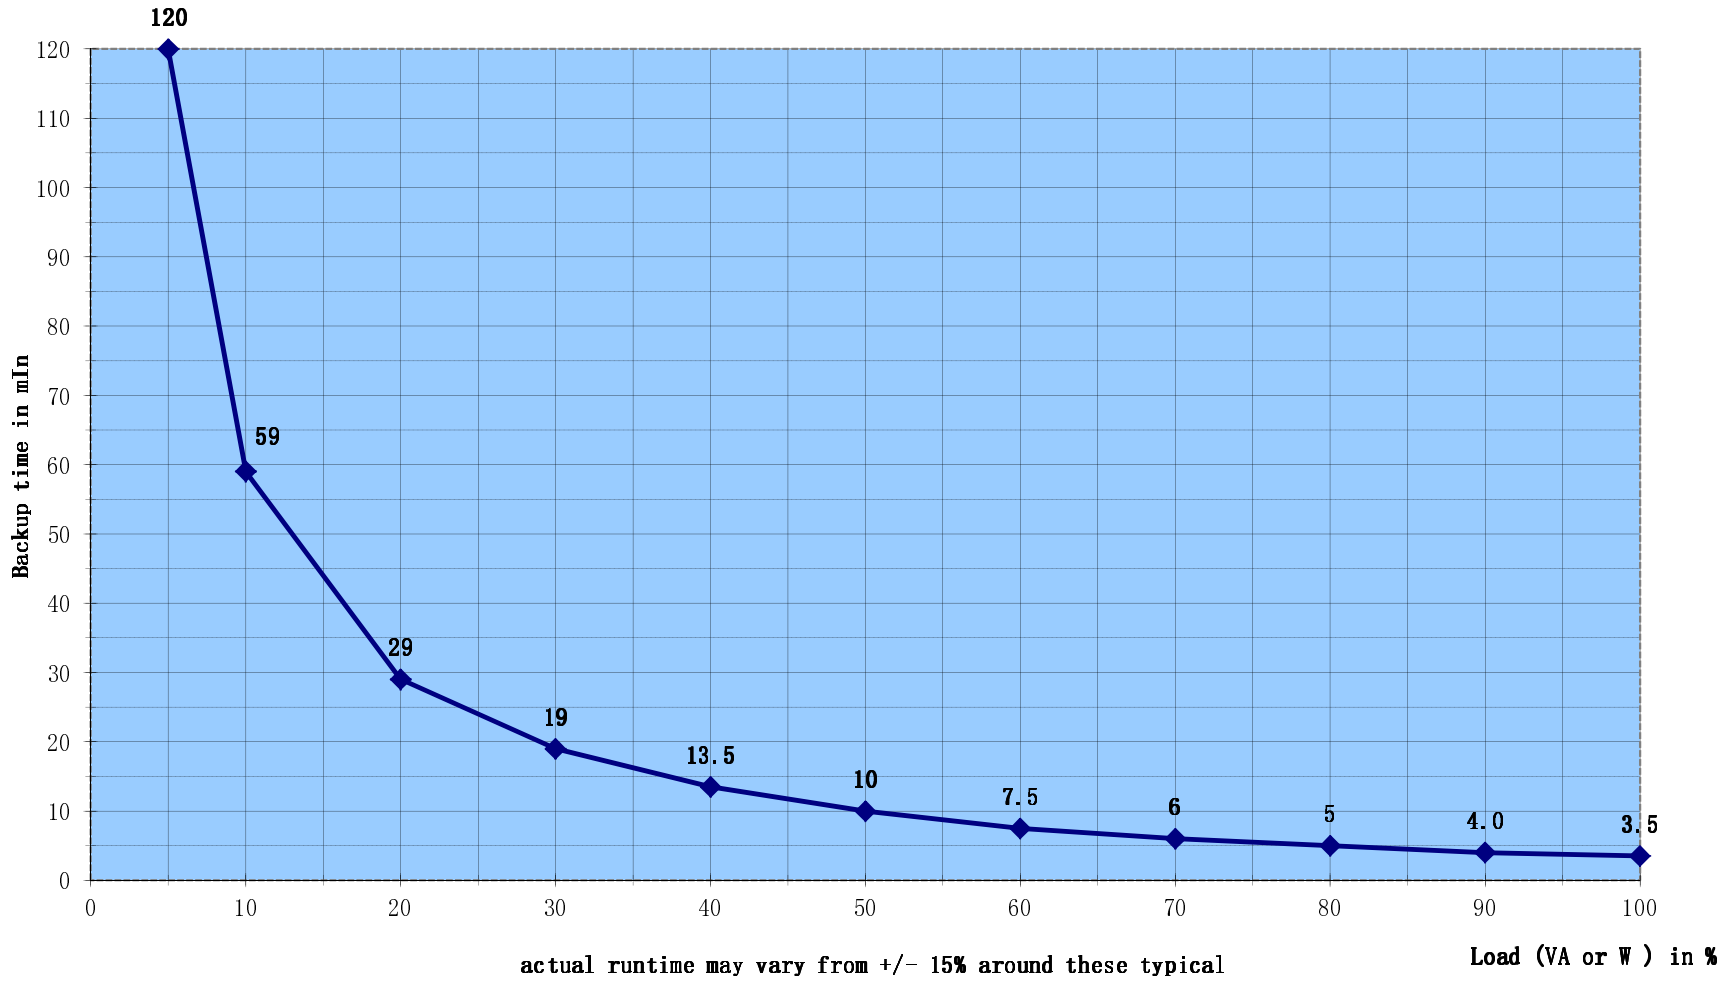


Eaton 9PX 2200 + EBM (100% = 2200 VA / 2200 W)

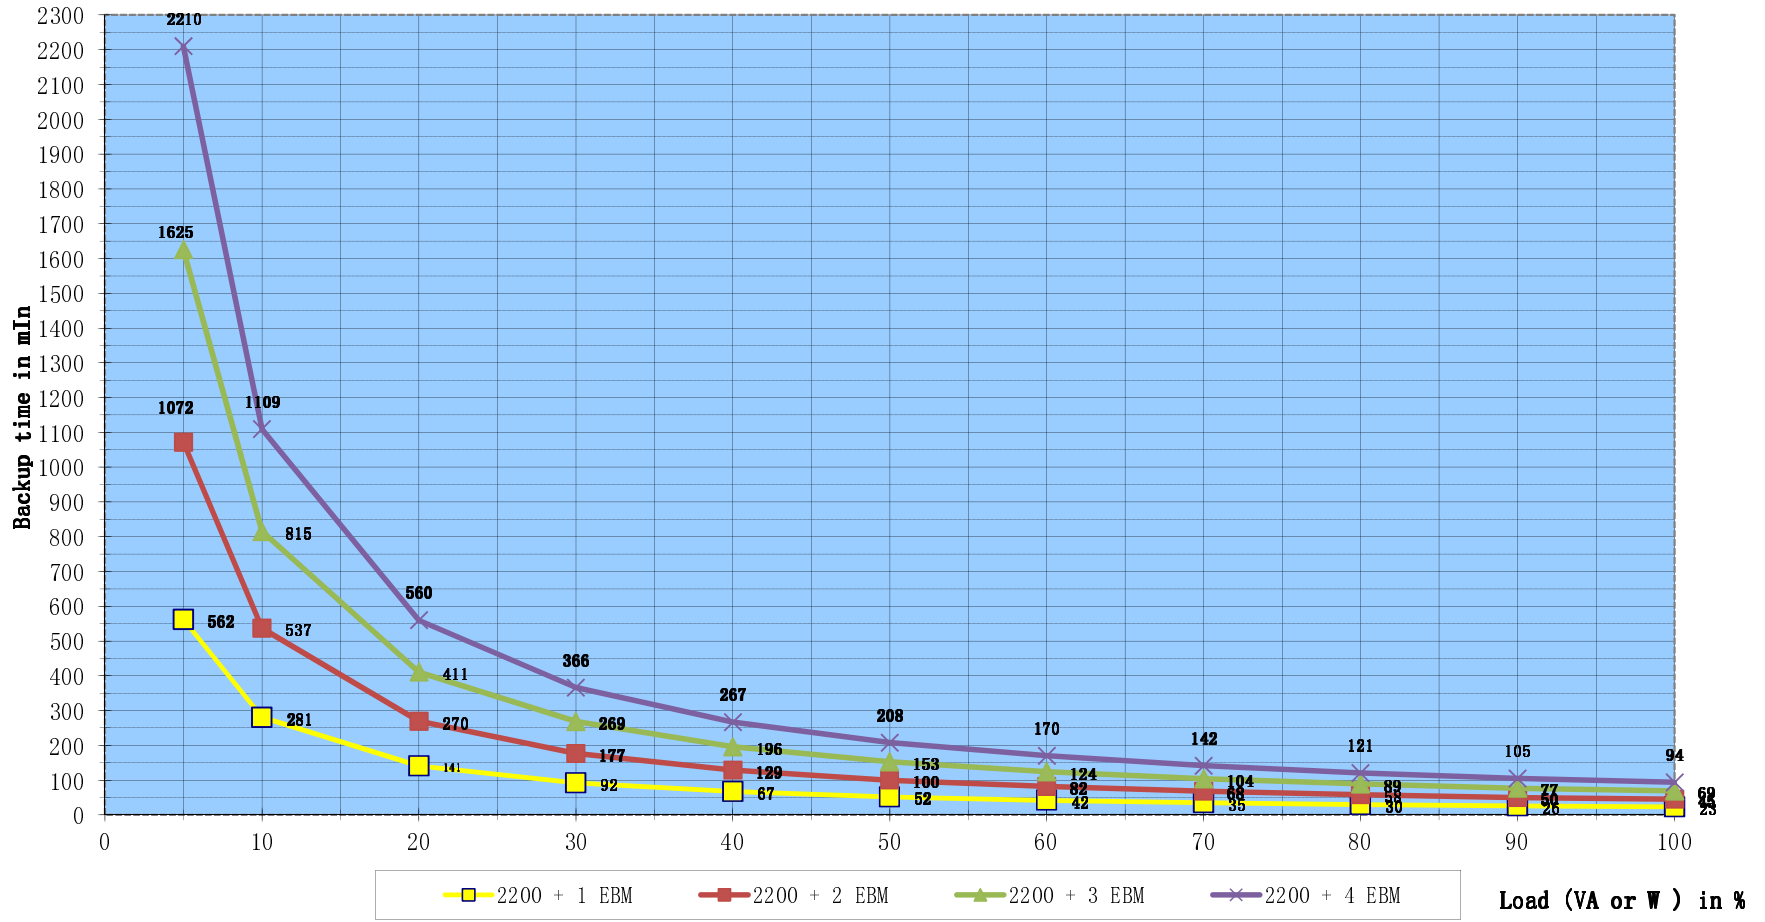

actual runtime may vary from +/- 15% around these typical values


Eaton 9PX 3000 (100% = 3000 VA / 3000 W)

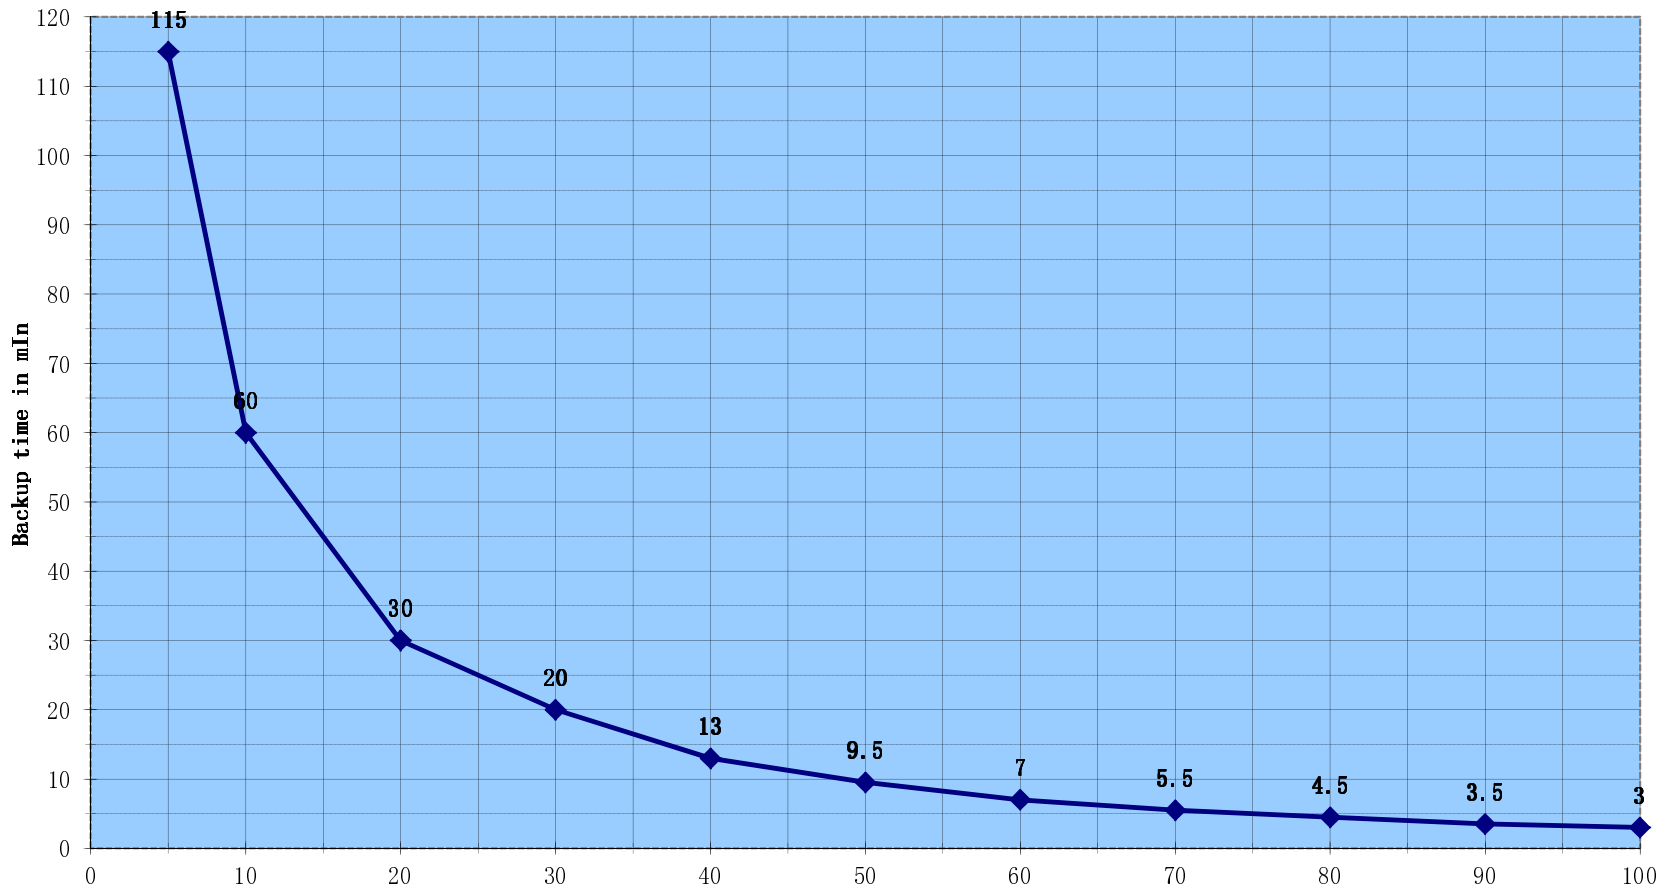

actual runtime may vary from +/- 15% around these typical values

Load (VA or W) in %

Eaton 9PX 3000 + EBM (100% = 3000 VA / 3000 W)

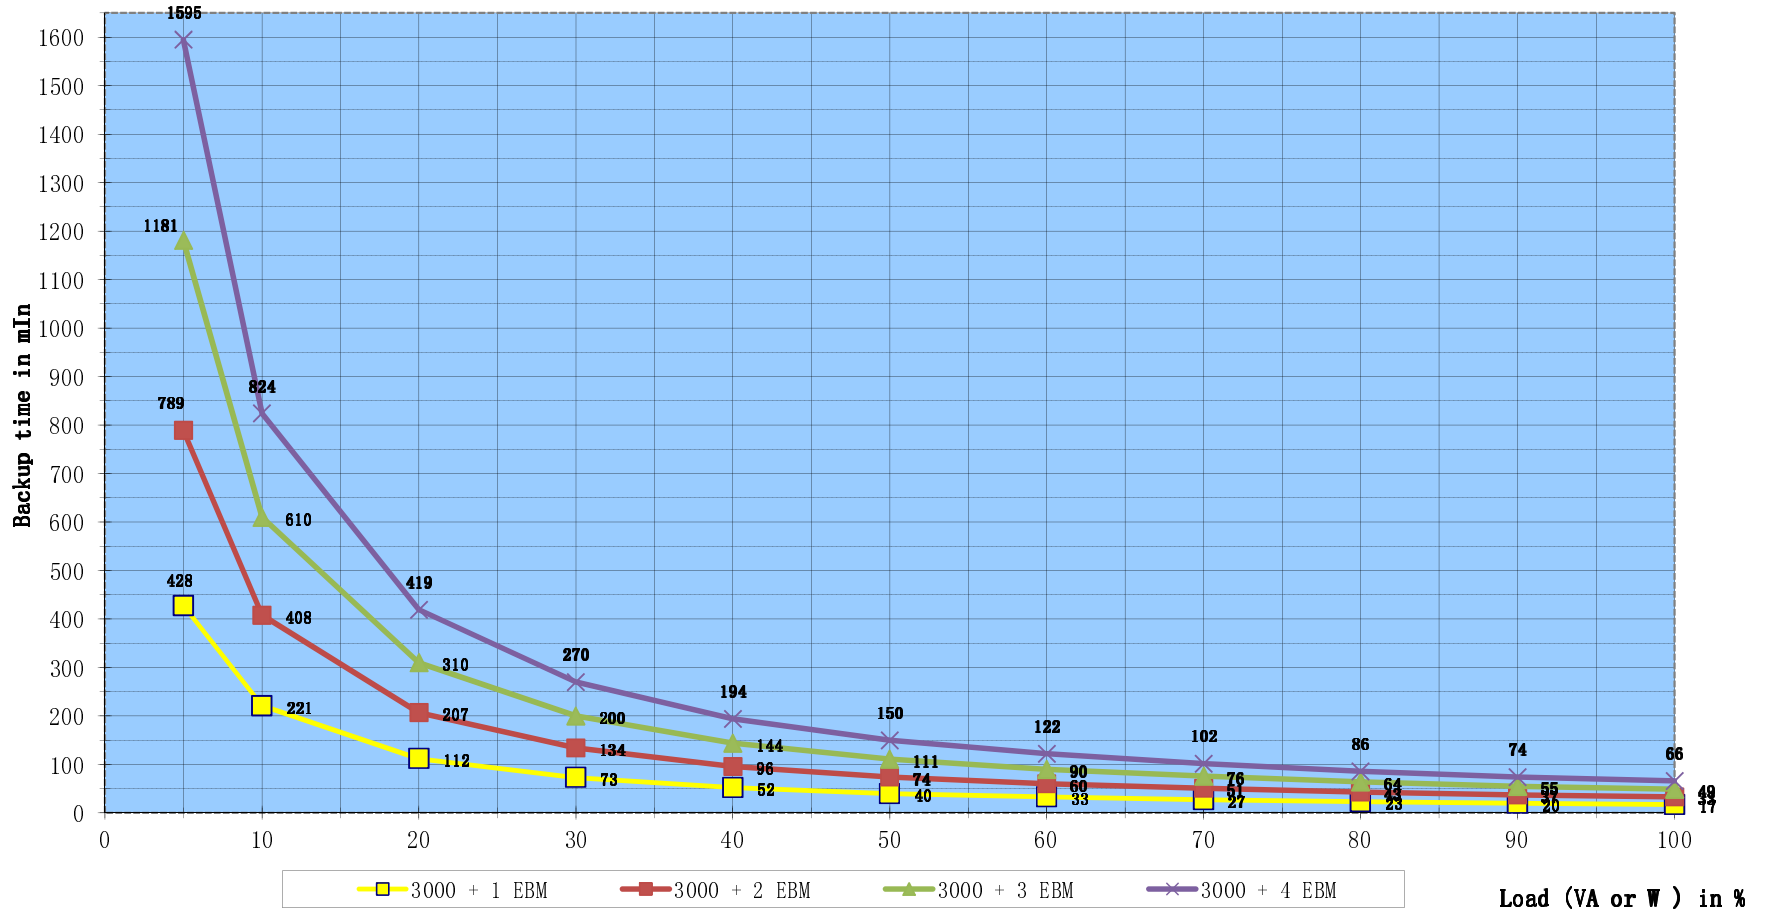

actual runtime may vary from +/- 15% around these typical values