

1.138 Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBm6, FRBm4, 3+N-poles, Type AC and A

SG02213



Description

- High-quality residual current device / miniature circuit breaker combination, line voltage-independent
- Contact position indicator red - green
- Fault current tripping indicator white - blue
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Wide variety of rated tripping currents
- Rated currents up to 32 A
- Tripping characteristics B, C, D
- Rated breaking capacity 6 kA or 4.5 kA

$I_n/I_{\Delta n}$
(A)

Type
Designation

Article No. Units per
package

Type A

4.5 kA, 3+N-poles

Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A 

SG02213



Characteristic C

20/0.03	FRBm4-C20/3N/003-A	171000	1/30
25/0.03	FRBm4-C25/3N/003-A	171001	1/30
32/0.03	FRBm4-C32/3N/003-A	171002	1/30
20/0.1	FRBm4-C20/3N/01-A	170930	1/30
25/0.1	FRBm4-C25/3N/01-A	170931	1/30
32/0.1	FRBm4-C32/3N/01-A	170932	1/30
20/0.3	FRBm4-C20/3N/03-A	170958	1/30
25/0.3	FRBm4-C25/3N/03-A	170959	1/30
32/0.3	FRBm4-C32/3N/03-A	170960	1/30

SG02213



Characteristic D

20/0.03	FRBm4-D20/3N/003-A	170895	1/30
20/0.1	FRBm4-D20/3N/01-A	170942	1/30
20/0.3	FRBm4-D20/3N/03-A	170970	1/30

$I_n/I_{\Delta n}$
(A)

Type
Designation

Article No.

Units per
package

Type AC

4.5 kA, 3+N-poles

Conditionally surge current-proof 250 A, Type AC 

SG02213



Characteristic C

20/0.03	FRBm4-C20/3N/003	170993	1/30
25/0.03	FRBm4-C25/3N/003	170994	1/30
32/0.03	FRBm4-C32/3N/003	170995	1/30
20/0.1	FRBm4-C20/3N/01	170923	1/30
25/0.1	FRBm4-C25/3N/01	170924	1/30
32/0.1	FRBm4-C32/3N/01	170925	1/30
20/0.3	FRBm4-C20/3N/03	170951	1/30
25/0.3	FRBm4-C25/3N/03	170952	1/30
32/0.3	FRBm4-C32/3N/03	170953	1/30

SG02213



Characteristic D

20/0.03	FRBm4-D20/3N/003	171007	1/30
20/0.1	FRBm4-D20/3N/01	170937	1/30
20/0.3	FRBm4-D20/3N/03	170965	1/30

Specifications | Combined RCD/MCB Devices FRBm6, FRBm4, 3+N-poles

Description

- Combined RCD/MCB device
 - Line voltage-independent tripping
 - Compatible with standard busbar
 - Twin-purpose terminal (lift/open-mouthed) above and below
 - Busbar positioning optionally above or below
 - Free terminal space despite installed busbar
 - Guide for secure terminal connection
 - Contact position indicator red - green
 - Fault current tripping indicator white - blue
 - Comprehensive range of accessories suitable for subsequent installation
 - The test key "T" must be pressed every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven. Under special conditions (e.g. damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltages due to switching of equipment and/or atmospheric discharges, portable equipment ...), it's recommended to test in monthly intervals.
 - Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement (R_E), or proper checking of the earth conductor condition redundant, which must be performed separately.
- **Type -A:** Protects against special forms of residual pulsating DC which have not been smoothed.

Accessories:


Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal switch for subsequent installation	ZP-NHK	248437
Shunt trip release	ZP-ASA/..	248438, 248439
Terminal cover 4-poles	Z-TC/SD-4P	178101

Technical Data


		FRBm6, FRBm4, 3+N-poles
Electrical		
Design according to		IEC/EN 61009
Current test marks as printed onto the device		
Tripping line voltage-independent		instantaneous 250A (8/20µs), surge current-proof, N protected
Rated voltage	U_n	240/415V AC, 50Hz
Rated tripping current	$I_{\Delta n}$	30, 100, 300 mA
Rated non-tripping current	$I_{\Delta no}$	0.5 $I_{\Delta n}$
Sensitivity		AC and pulsating DC
Selectivity class		3
Rated short circuit capacity	I_{cn}	
FRBm6		6 kA
FRBm4		4.5 kA
Rated current		6 - 32 A
Rated impulse withstand voltage	U_{imp}	4 kV (1.2/50µs)
Characteristic		B, C, D
Maximum back-up fuse (short circuit protection)		100 A gL (>10 kA)
Endurance		
electrical components		≥ 4,000 operating cycles
mechanical components		≥ 10,000 operating cycles
Mechanical		
Frame size		45 mm
Device height		80 mm
Device width		70 mm (4MU)
Mounting		3-position DIN rail clip, permits removal from existing busbar system
Degree of protection switch		IP20
Degree of protection, built-in		IP40
Upper and lower terminals		open mouthed/lift terminals
Terminal protection		finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity		1 - 25 mm ²
Terminal torque		2 - 2.4 Nm
Busbar thickness		0.8 - 2 mm
Operation temperature		-25°C to +40°C
Storage- and transport temperature		-35°C to +60°C
Resistance to climatic conditions		acc. to IEC 68-2 (25..55°C / 90..95% RH)

Connection diagram


3+N-poles



Dimensions (mm)

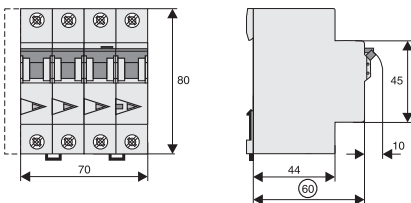

Tripping Characteristic FRBm. 3+N-poles, Characteristics B, C and D

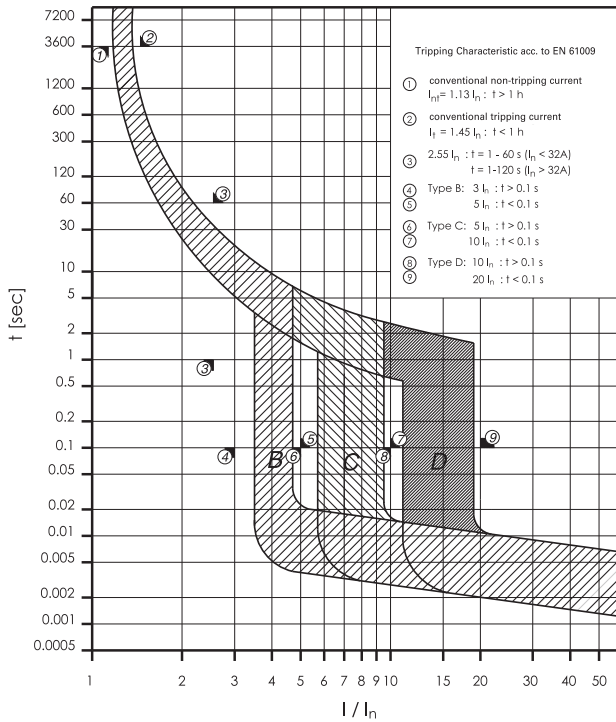

Internal Resistance FRBm. 3+N-poles

	Type B			Type C			Type D		
	L1, L2	L3	N	L1, L2	L3	N	L1, L2	L3	N
At room temperature (single pole)									
I_n [A]	R* [mΩ]	R* [mΩ]	R* [mΩ]	R* [mΩ]	R* [mΩ]	R* [mΩ]	R* [mΩ]	R* [mΩ]	R* [mΩ]
6	-	-	-	34,3	28,2	28,8	34,3	28,0	29,7
10	-	-	-	19,3	15,3	18,1	19,7	15,3	15,3
13	11,8	12,6	12,2	11,9	12,7	9,1	9,9	10,4	8,9
16	9,8	9,3	7,8	9,5	8,8	6,6	9,8	9,2	6,8
20	-	-	-	6,5	5,9	5,5	6,6	6,1	5,5
25	-	-	-	4,3	3,7	3,5	-	-	-

* 50Hz

Power Loss at I_n FRBm. 3+N-poles

	Type B	Type C	Type D
(entire unit)			
I_n [A]	P* [W]	P* [W]	P* [W]
6	-	4,8	4,8
10	-	8,2	7,8
13	10,2	9,4	7,7
16	11,6	10,9	11,2
20	-	11,8	12,0
25	-	11,6	-

* 50Hz and ambient temperature

Back-up Protection FRBm4/FRBm6

The up-stream protective devices will protect the down-stream FRBm4/FRBm6 up to the short-circuit current specified.

FRBm and NZM1

Short circuit currents in kA.

FRBm4/ FRBm6	NZMB1(C1)(N1)(H1)-A...		
	U _e = 415 V		
	Type B	Type C	Type D
6	-	20	20
10	-	20	20
13	20	20	20
16	20	20	20
20	-	20	20
25	-	20	-

U_e = 415V: I_{cn} (FRBm4) = 4.5 kA (acc. to IEC/EN 61009)

U_e = 415V: I_{cu} (FRBm6) = 6 kA (acc. to IEC/EN 61009)

U_e = 400/415V: I_{cn} (NZMB1) = 25 kA (acc. to IEC/EN 60947-2)

U_e = 400/415V: I_{cn} (NZMC1) = 36 kA (acc. to IEC/EN 60947-2)

U_e = 400/415V: I_{cn} (NZMN1) = 50 kA (acc. to IEC/EN 60947-2)

U_e = 400/415V: I_{cn} (NZMH1) = 100 kA (acc. to IEC/EN 60947-2)

FRBm and NZM2

Short circuit currents in kA.

FRBm4/ FRBm6	NZMB2(C2)(N2)(H2)-A...		
	U _e = 415 V		
	Type B	Type C	Type D
6	-	20	20
10	-	20	20
13	20	20	20
16	20	20	20
20	-	20	20
25	-	20	-

U_e = 415V: I_{cn} (FRBm4) = 4.5 kA (acc. to IEC/EN 61009)

U_e = 415V: I_{cu} (FRBm6) = 6 kA (acc. to IEC/EN 61009)

U_e = 400/415V: I_{cn} (NZMB2) = 25 kA (acc. to IEC/EN 60947-2)

U_e = 400/415V: I_{cn} (NZMC2) = 36 kA (acc. to IEC/EN 60947-2)

U_e = 400/415V: I_{cn} (NZMN2) = 50 kA (acc. to IEC/EN 60947-2)

U_e = 400/415V: I_{cn} (NZMH2) = 150 kA (acc. to IEC/EN 60947-2)