

Eaton STS 16



Product Snapshot

Power Rating:	26 kVA
Voltage:	208/230V
Frequency:	50/60 Hz (auto-sensing)
Configuration:	Rackmount

Source transfer system

Power supply redundancy for single-connection circuit equipment. With the Eaton STS 16, power from 2 independent sources can be supplied to servers and circuit equipment which only have one input power supply.

Redundancy

While the majority of network devices and entry-level servers are single connection and only have one electrical power input, the Eaton STS can be connected to multiple pieces of critical equipment.

Both the primary and secondary sources are connected to the STS at the base of the rack. The STS controls the redundancy of this electrical power supply. If the primary source fails, the transfer to the secondary source is automatic and seamless.

Simple and cost-effective

Considering its advanced design, the price of the Eaton STS is highly competitive compared with the 'dual power supply' options available from suppliers of computer equipment.

Measuring at 1U high, the unit can be installed easily within the rack. Five LEDs indicate the status of the sources and the Eaton STS.

Reliability

Designed to provide redundancy as close as possible to the equipment, the Eaton STS deploys a technology based on relays:

- In the event of a short-circuit, the Eaton STS ensures that the fault cannot affect the alternative source, so that power continues to be supplied to the fault-free equipment
- Power is transferred without overlap of the sources in order to prevent any node of reliability
- Even if it suffers a fault, the Eaton STS continues to supply power to the equipment from the remaining available source



Powering Business Worldwide

Technical specifications

Nominal current	16 A
Compatibility	With all uninterruptible power supplies which use on-line double conversion technology

Input/output

Voltage/input frequency	208/220/230/240 V +/- 12% ; 50/60 Hz
Output protection	1 thermal cutout per set of IEC 13 connectors

Performance

Transfer time	6 ms
---------------	------

Technical standards	
---------------------	--

Safety	EN 50091-1
--------	------------

EMC	EN 50022/B, IEC 1000-4
-----	------------------------

Marking	CE, TÜV/GS/UL
---------	---------------

Connection

Inputs	2 connecting cables with IEC C20 connector (16 A male connector)
--------	--

Outputs	7 IEC C13 connectors 1 IEC C19 connector
---------	---

Dimensions and weight

Dimensions H x W x D	43 x 4 x 25 cm
----------------------	----------------

Weight	11 lbs.
--------	---------

Customer Service & Support

2 year guarantee	Standard exchange of the product
------------------	----------------------------------

Communications software and hardware

A simple and complete mimic diagram	Displays the various status of the sources and the Eaton STS
-------------------------------------	--

An 'STS COM' communication port	Of the dry contact type indicates the status of the sources and the Eaton STS: primary source, source OK, fault within the Eaton STS
---------------------------------	--

Part Numbers

STS 16	66028
Set of two 16 A connecting cables IEC female connector / USE-DIN male connector length 1.5 m	66397
1 cable / IEC 10 A male to IEC 16 A female	66029

UNITED STATES
8609 Six Forks Road
Raleigh, NC 27615 U.S.A.
Toll Free: 1.800.356.5794


www.eaton.com/powerquality

CANADA
Ontario: 416.798.0112
Toll free: 1.800.461.9166

LATIN AMERICA
South Cone: 54.11.4124.4000
Brazil: 55.11.3616.8500
Andean & Caribbean:
1.949.452.9610
Mexico & Central America:
52.55.9000.5252

Eaton STS 16

STS 16, front view

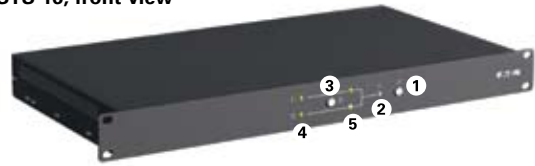

- 1 Buzzer stop
- 2 Fault indicator
- 3 Select primary source
- 4 Status of the sources
 - source OK
 - source failed
- 5 Eaton STS output
 - power supplied via the primary source
 - supplied via the secondary source

STS 16, rear view



- 1 Circuit breakers
- 2 Output
- 3 Input



PowerChain Management®

EUROPE/MIDDLE EAST/AFRICA
Denmark: 45.3686.7910
Finland: 358.94.52.661
France: 33.1.6012.7400
Germany: 49.0.7841.604.0
Italy: 39.02.66.04.05.40
Norway: 47.23.03.65.50
Portugal: 55.11.3616.8500
Sweden: 46.8.598.940.00
United Kingdom: 44.1753.608.700

ASIA PACIFIC
Australia: 61.2.9693.9366
New Zealand: 64.0.3.343.3314
China: 86.21.6361.5599
HK/Korea/Taiwan: 852.2745.6682
India: 91.11.4223.2300
Singapore/SEA: 65.6825.1668

Eaton and PowerChain Management are trade names, trademarks, and/or service marks of Eaton Corporation or its subsidiaries and affiliates.

All other trademarks are property of their respective owners.

©2010 Eaton Corporation
All Rights Reserved
Printed in USA
STS02FXA
MAY 2010