

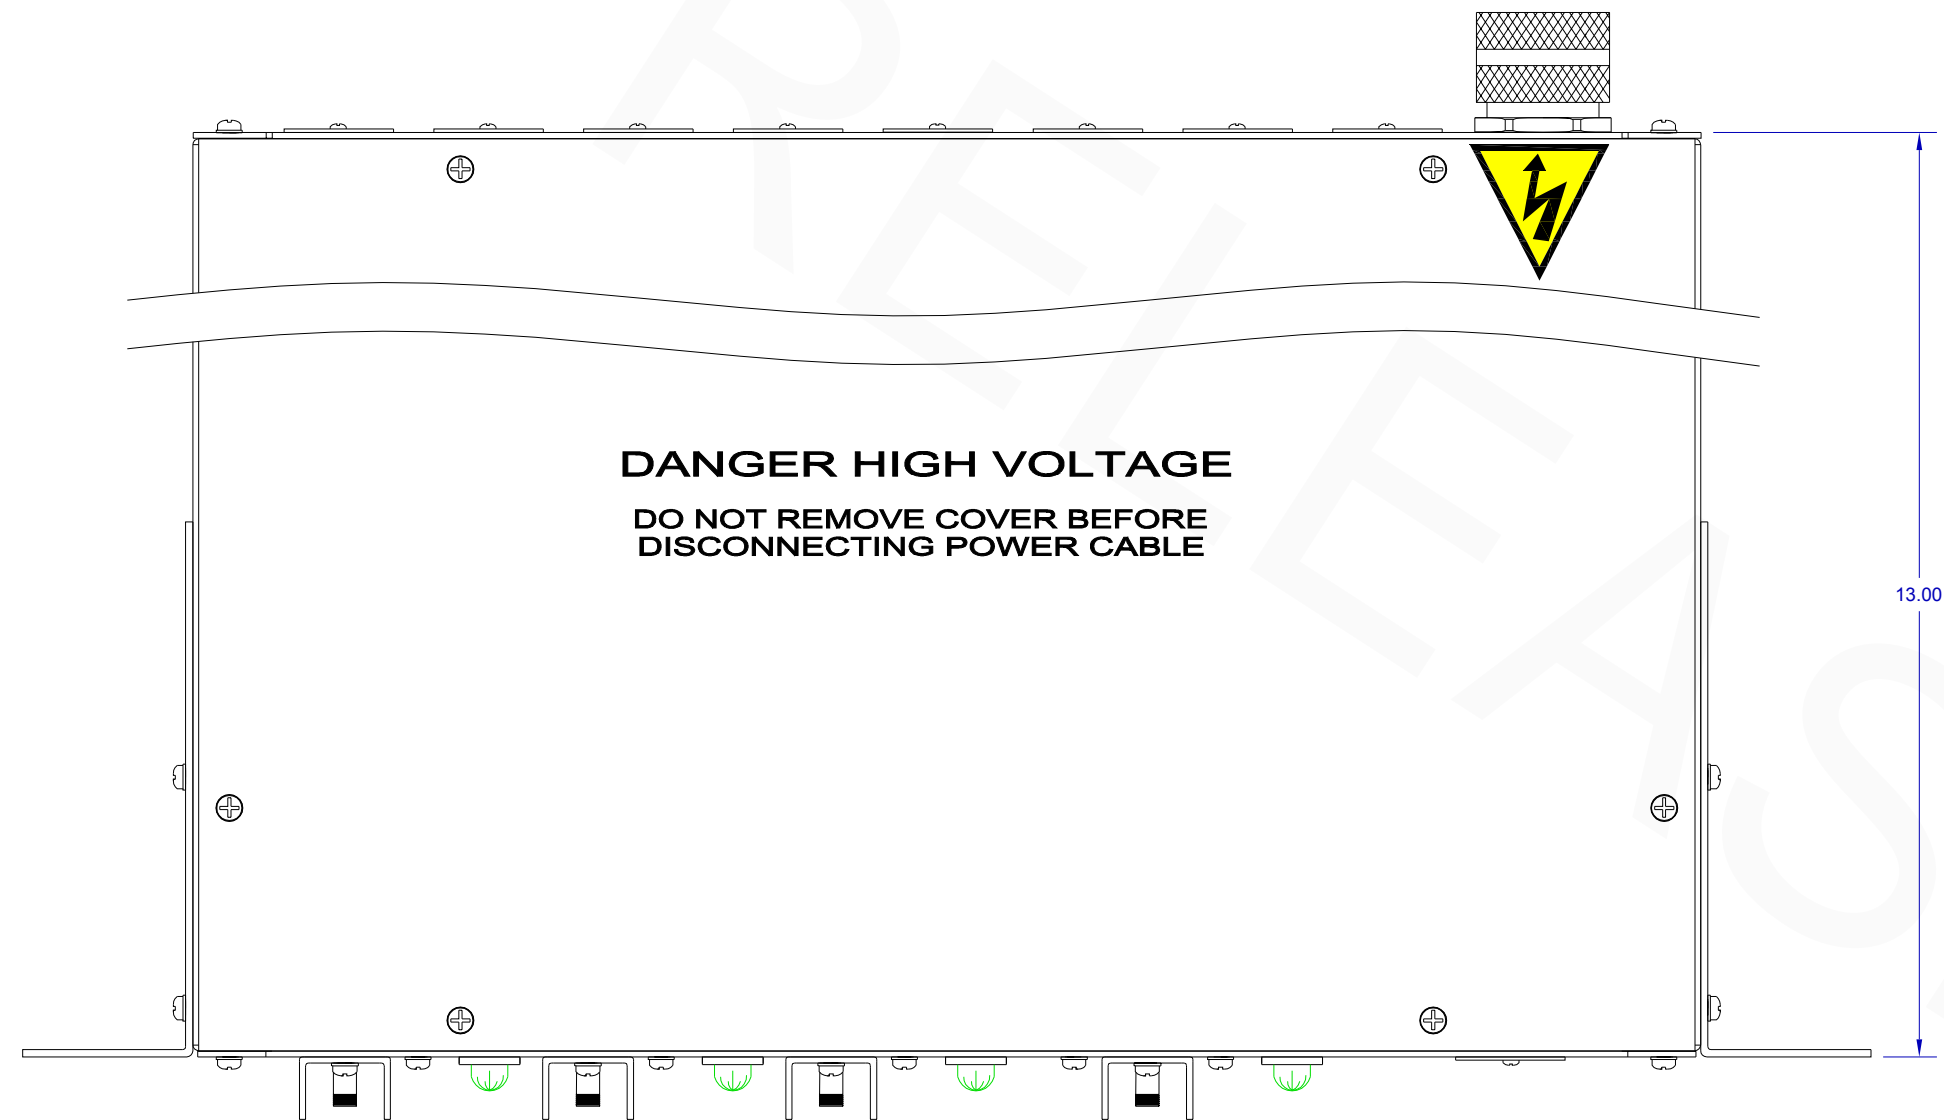
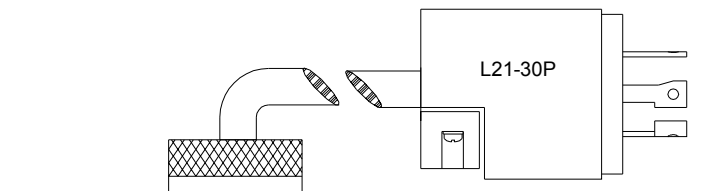


LTR	ECO No.	REVISION	DR	CK	AP	AP	DATE
A		ENGINEERING RELEASE	MBP				08/11/00
B	6379	REMOVE VARISTOR SWITCH	J.O.				6 JULY 01
C	7241	CORRECT FRONT & REAR PANEL	LS		J.O.		15 OCT 02
D	7506	CORRECT SILKSCRN, NOTES	MDV				04/21/03
E	7910	REMOVE AGENCY LABEL	LS		DK		28 MAY 04
F	014333	UPDATE BORDER & SCREEN	JF				24 AUG 10

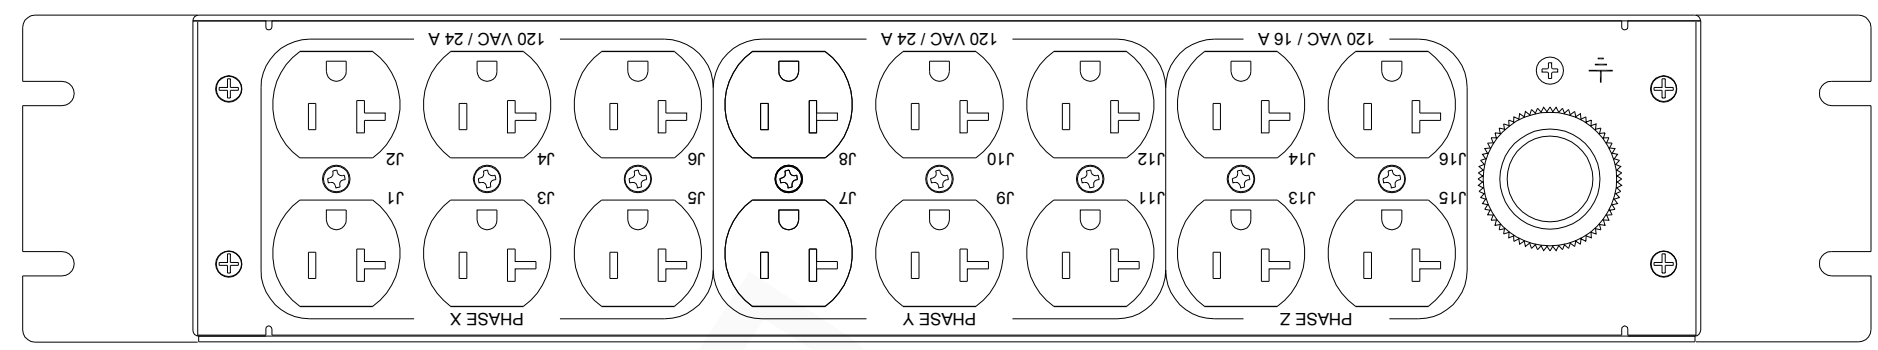

- NOTES:
- RACK MOUNT STEEL CHASSIS, GOLD ZINC PLATED
19.00" WIDE, WITH STANDARD RACK MOUNT BRACKETS
3.36" HIGH (2U)
13.00" DEEP
NOTE: CHASSIS SUPPORT BRACKETS OR SLIDES ARE REQUIRED
 - INPUT: 120/208 VAC 24A, 3 PHASE WYE, 50/60 Hz
CABLE: 15 FEET 10/5 SOOW, WITH NEMA L21-30 PLUG
 - OUTPUT:
SIX NEMA 5-20 OUTLETS PER PHASE
PHASE X: J1-J6, BACK PANEL, 24 AMPS
PHASE Y: J7-J12, BACK PANEL, 24 AMPS
PHASE Z: J13-J16, BACK PANEL, 16 AMPS
PHASE Z: J17-J18, FRONT PANEL, 8 AMPS
24 AMPS MAX PER PHASE
 - CIRCUIT BREAKERS:
ONE MAIN 3-POLE 30 AMP BREAKER
THREE 2-POLE 20 AMP BREAKERS, ONE PER PHASE
 - INDICATOR LIGHTS (4 GREEN):
ONE FOR MAIN BREAKER
ONE FOR EACH PHASE
 - FILTER: EMI/RFI FILTER, 30 AMP 3 PHASE
COMMON MODE, LINE TO GROUND
DIFFERENTIAL MODE, LINE TO LINE, LINE TO NEUTRAL
 - SPIKE/SURGE PROTECTION: NONE
 - UL/cUL LISTED PRODUCT

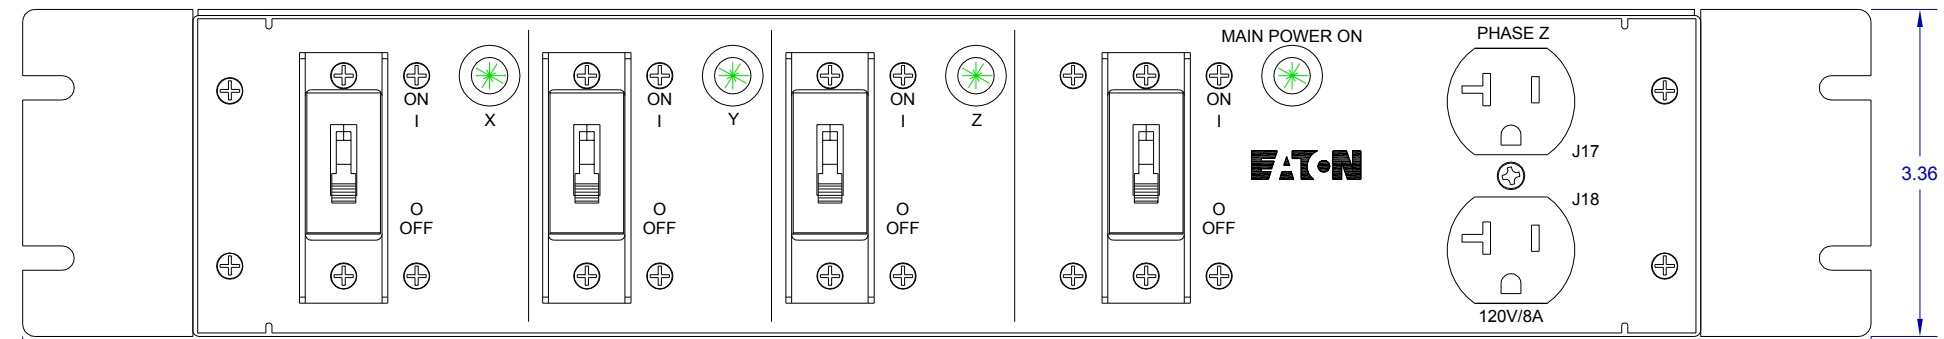

EATON APPROVAL

19.00

THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF EATON CORPORATION. EATON CORPORATION RESERVES ALL PATENT, PROPRIETARY, DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS THERETO, AND TO ANY ARTICLE DISCLOSED THEREIN, EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY PARTS. COPYRIGHT 2010 EATON CORP

		9650 Jeronimo Road, Irvine, California 92618 Phone (949) 452-9500 www.epdu.com	
DIMENSIONS IN INCHES TOLERANCES: DECIMALS ± 0.5" .XX ± 0.20 .XXX ± 0.10 UNLESS OTHERWISE SPECIFIED CAGE CODE 31795		TITLE ENGINEERING DRAWING FOR PC2646-D ASSY 2667	
DRAWN BY: MDV SCALE: 1:1	SHEET: 1 OF 1 SIZE: D	DWG FILENAME: PC_2646_D_2667_ME.DWG DWG NO.:	REV: F