


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

NOTES:

1. OPERATOR INTERFACE PANEL.
2. SCR MODULE.
3. MAIN INPUT CIRCUIT BREAKER.
4. SUB-FEED CIRCUIT BREAKER.
5. MOLDED CASE INPUT SWITCH.
6. MOLDED CASE BYPASS SWITCH.
7. MOLDED CASE ISOLATION SWITCH.
8. ALLOW A MINIMUM OF 21" CLEARANCE FOR FRONT DOOR SWING.
9. ALLOW A MINIMUM OF 21" CLEARANCE ON LEFT FOR SIDECAR DOOR SWING.
10. RECOMMEND A MINIMUM OF 6" CLEARANCE BETWEEN WALL & VENTILATED SIDES FOR PROPER COOLING.

FRONT VIEW
(DOORS AND COVERS REMOVED)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [] IN MILLIMETER ANGULAR: ±0.5° BEND ±1° TWO PLACE DECIMAL ±0.02 THREE PLACE DECIMAL ±0.005		THIS DRAWING CONTAINS CONFIDENTIAL & PROPRIETARY INFORMATION AND SHALL NOT BE DISCLOSED OR COPIED WITHOUT THE EXPRESSED, WRITTEN PERMISSION OF SMITHS POWER		
 THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		
APPROVALS		DATE		TITLE: STATIC SWITCH PRIMARY SYSTEM FRONT ACCESS WITH SUB-FEEDS
DRAWN MJP		1/14/16		
CHECKED				
ENG. APPR.				
		SIZE	DWG. NO.	REV
		B	SSP19574	
		PART NO.		SHEET 1 OF 2

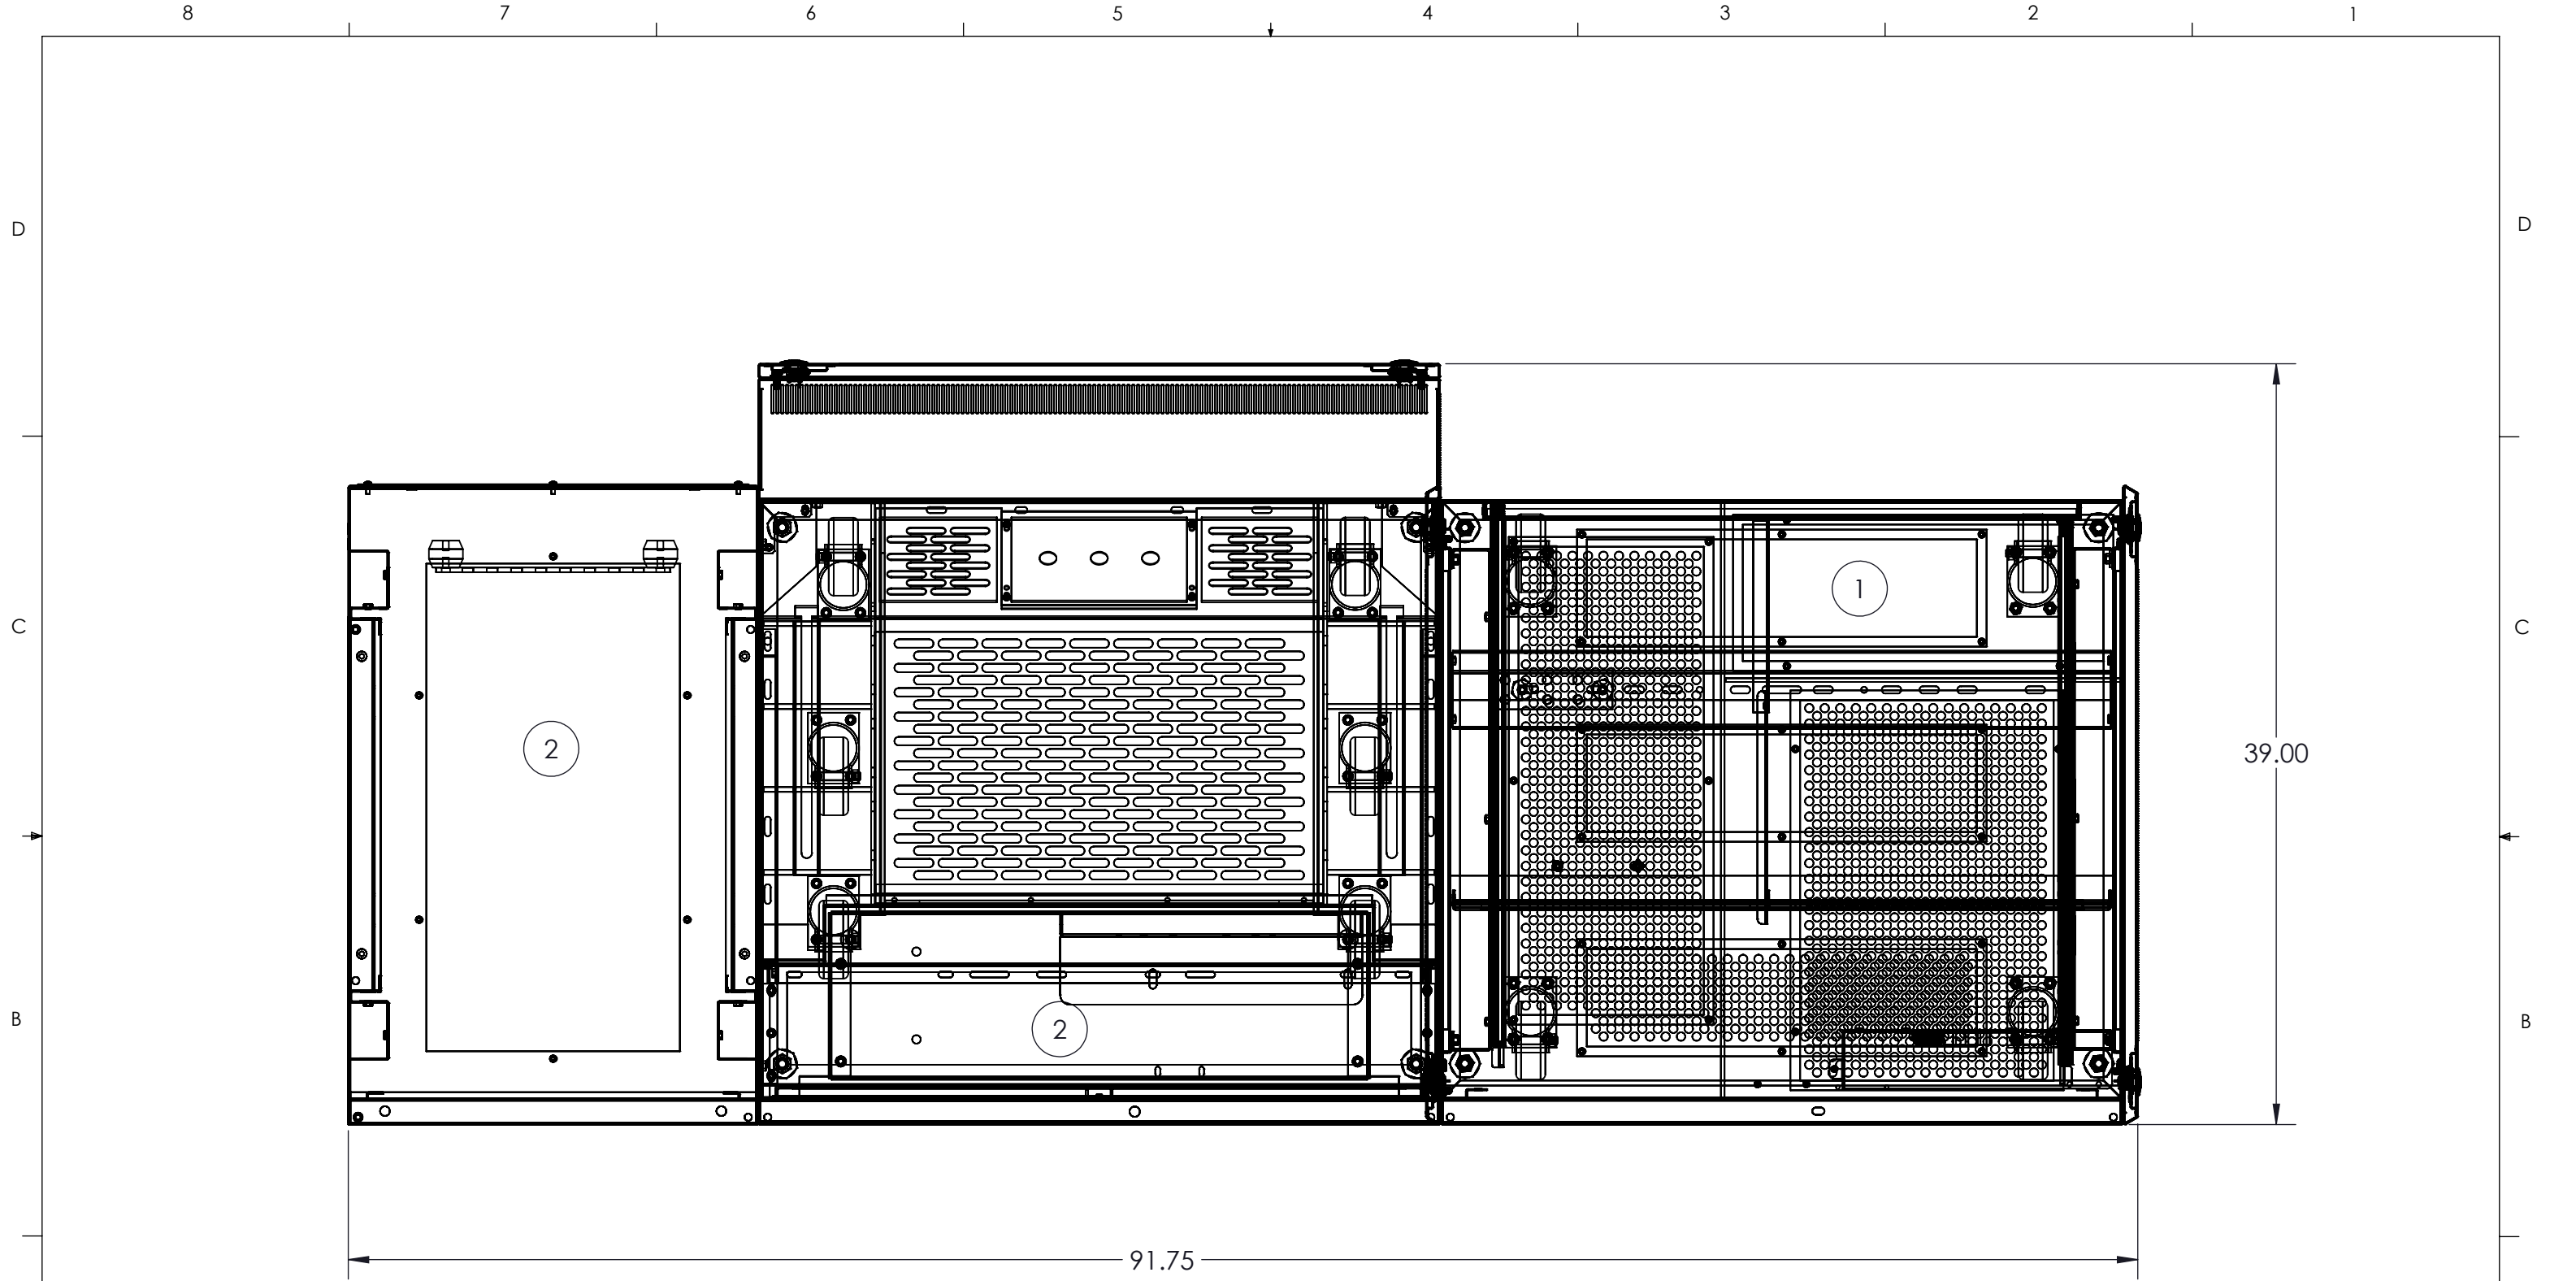

PLAN VIEW

NOTES:

- 1. INPUT CABLE AREA TO PUNCHED.
- 2. OUTPUT CABLE AREA TO PUNCHED.

SIZE	DWG. NO.	REV
B	SSP19574	
	PART NO.	SHEET 2 OF 2
	SSP19574	