


VIEW SHOWS BOTTOM ENTRY AND EXIT

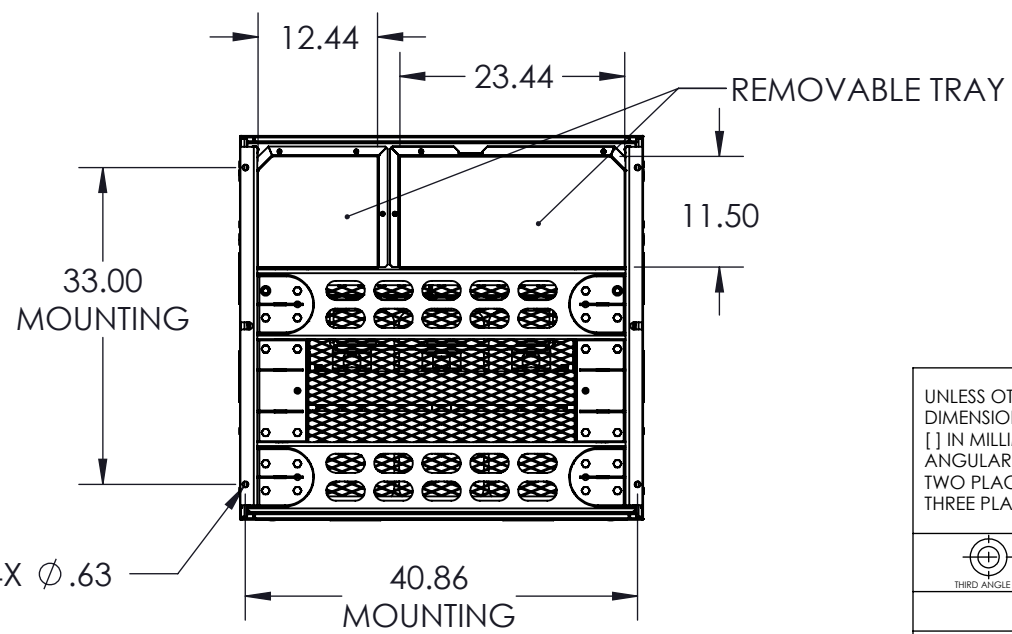

GENERAL SPECIFIED

CABINET CHARACTERISTIC:
ENCLOSURE : NEMA 1
LOCATION : INDOOR

MECHANICAL:
MOUNTING: BOLT TO CONCRETE FLOOR OR FLOOR STAND
MATERIAL: STEEL
WEIGHT : 3000 LBS. APPROX.

ELECTRICAL:
INPUT #1: 600 VAC MAX 3PH W/GND @ 60 HZ, 500A (MAX) (3 EA. # 3/0-500 MCM)
OUTPUT SUBFEED #1 - #5: 3-POLE, 600VAC MAX, 250A, 100% CONTINUOUS LOAD (3/0 - 350 MCM)

FRONT ACCESS FOR INSTALLATION AND MAINTENANCE
ALL OPERATOR CONTROL ARE FRONT ACCESS WITHOUT EXPOSE TO LIVE PARTS
MINIMUM 6" FOR SIDE AND REAR FOR VENTILATION

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
[] IN MILLIMETER
ANGULAR: ±0.5° BEND ±1°
TWO PLACE DECIMAL ±0.02
THREE PLACE DECIMAL ±0.005

THIS DRAWING CONTAINS
CONFIDENTIAL & PROPRIETARY
INFORMATION AND SHALL NOT
BE DISCLOSED OR COPIED
WITHOUT THE EXPRESSED,
WRITTEN PERMISSION OF
SMITHS POWER



THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	
APPROVALS		DATE	
DRAWN			
CHECKED			
ENG. APPR.			

TITLE: PP2 SUBMITTAL DRAWING (5) 250A SUBFEED, 300KVA		
SIZE B	DWG. NO. PDU56522	REV A
PART NO.		SHEET 1 OF 1