
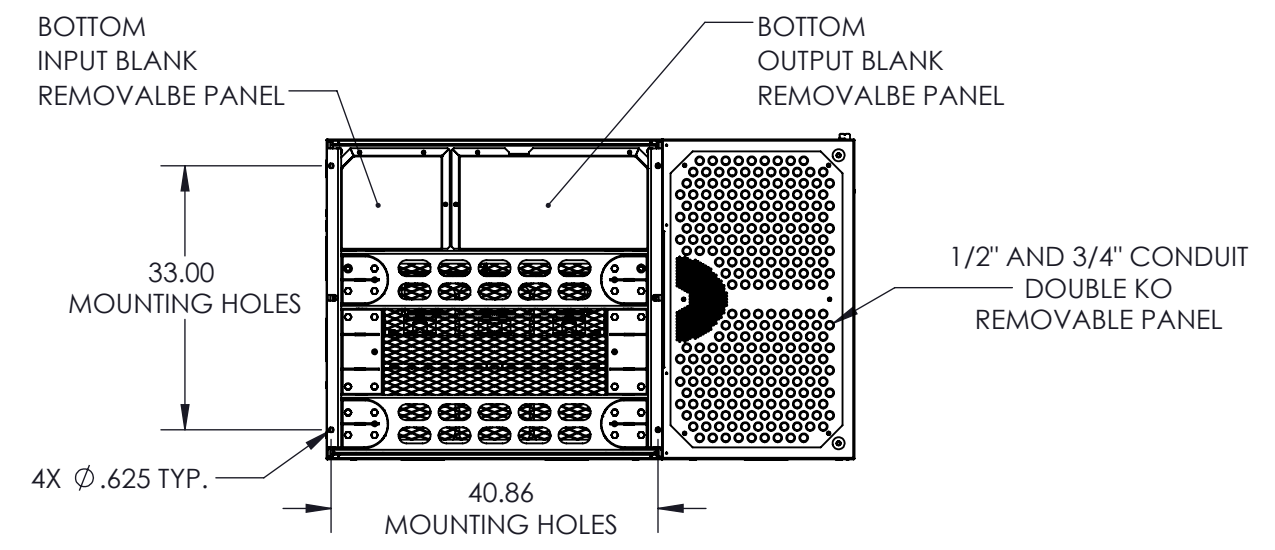
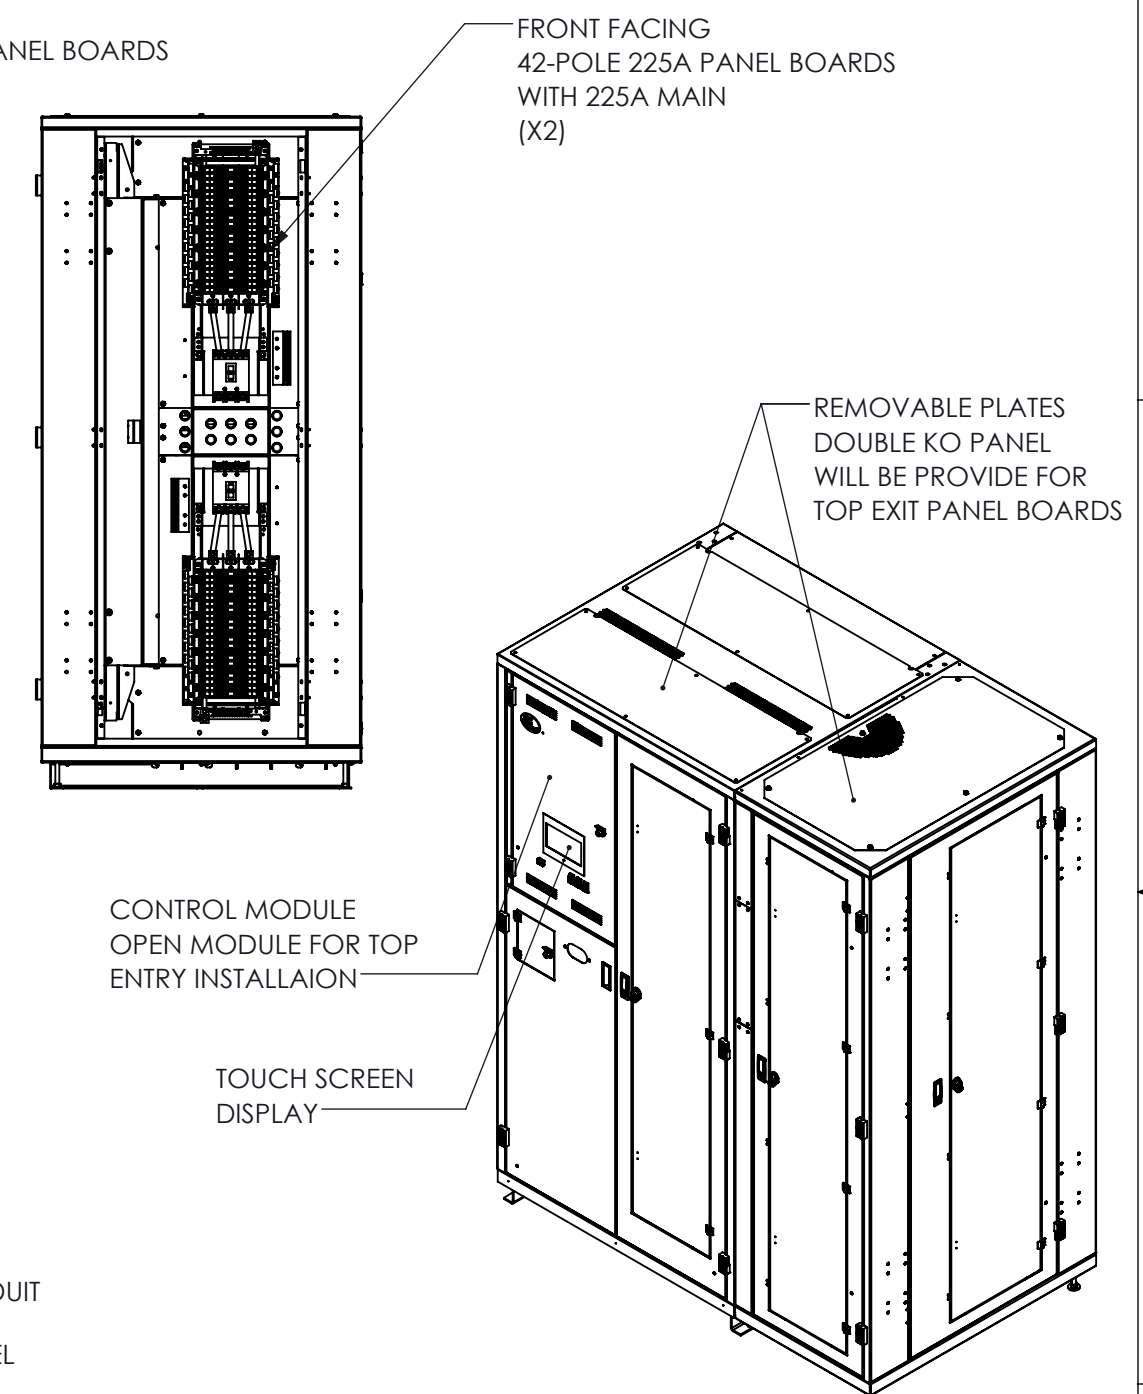
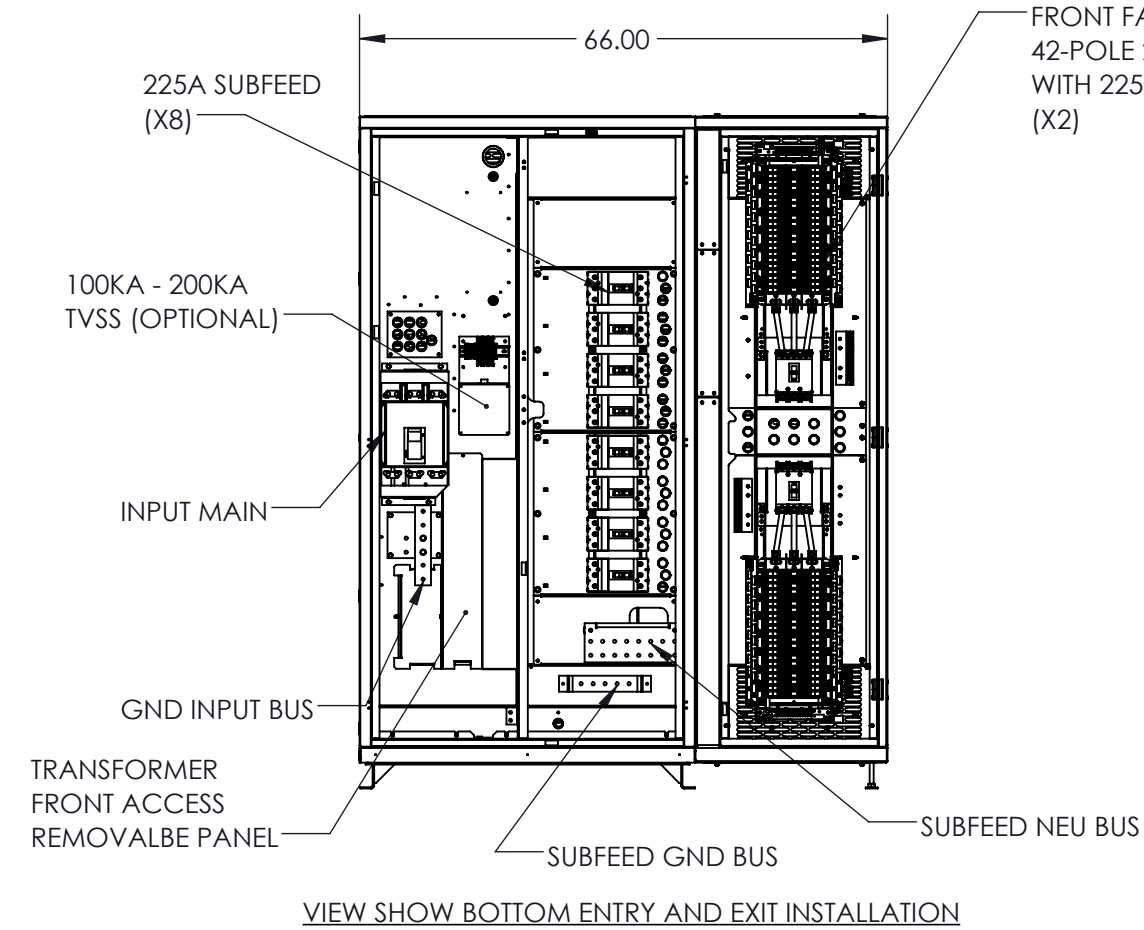


8 7 6 5 4 3 2 1

D
C
B
A

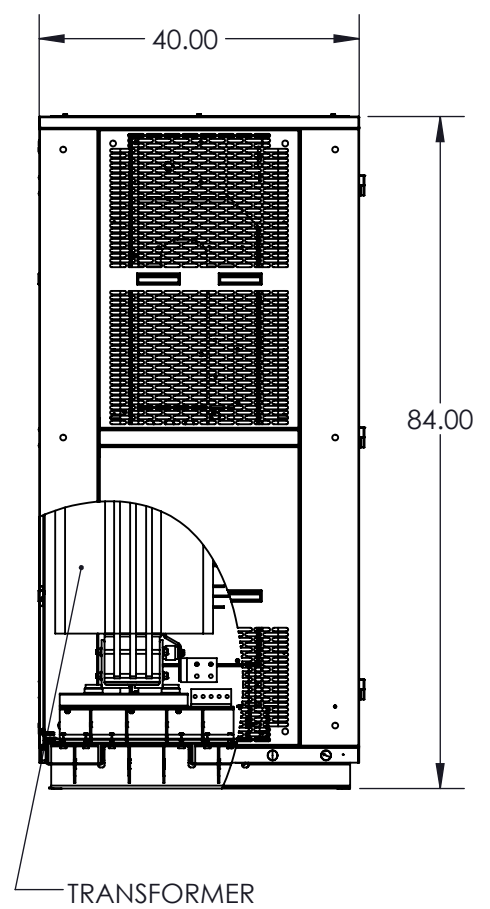

GENERAL SPECIFIED

CABINET CHARACTERISTIC:
ENCLOSURE : NEMA 1
LOCATION : INDOOR

MECHANICAL:
MOUNTING: BOLT TO CONCRETE OR FLOOR STAND
MATERIAL: STEEL
WEIGHT : 3500 LBS. APPROX.

ELECTRICAL:
INPUT #1: 480 VAC 3PH-3W W/GND(INPUT CABLES TO BREAKER DIRECTLY)
OUTPUT SUBFEED #1-8: 120/208 VAC, 225A (1 EA. # 3/O-350 MCM AL/CU)
OUTPUT PB #1-4: 42 POLE, BOLT ON CIRCUIT BREAKER (60 A MAX)

FRONT ACCESS FOR INSTALLATION AND MAINTENANCE
ALL OPERATOR CONTROL ARE FRONT ACCESS WITHOUT EXPOSE TO LIVE PARTS
MINIMUM 6" FOR SIDE AND REAR FOR VENTILATION

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
[] IN MILLIMETER
ANGULAR: ±0.5° BEND ±1°
TWO PLACE DECIMAL ±0.02
THREE PLACE DECIMAL ±0.005

THIS DRAWING CONTAINS
CONFIDENTIAL & PROPRIETARY
INFORMATION AND SHALL NOT
BE DISCLOSED OR COPIED
WITHOUT THE EXPRESSED,
WRITTEN PERMISSION OF
SMITHS POWER



THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	
APPROVALS		DATE	
DRAWN			
CHECKED			
ENG. APPR.			

TITLE: POWERPAK 2 SUBMITTAL (8) 225A SUBFEEDS (4) 225A PANEL BOARDS WITH MAIN		
SIZE B	DWG. NO. PDU56508	REV A
PART NO.		SHEET 1 OF 1

8 7 6 5 4 3 2 1