


Coordination chart for Kearney type K with type X fuse links

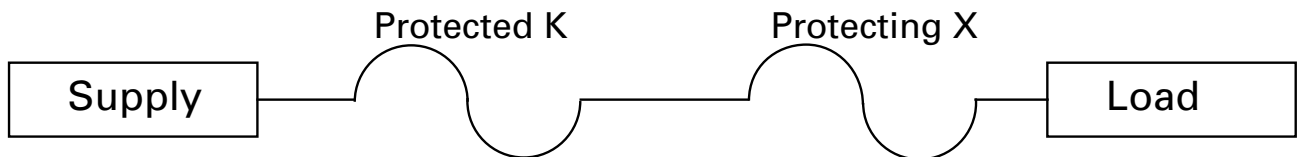

Protecting fuse type X	Protected fuse ampere rating type K												
	10	12	15	20	25	30	40	50	65	80	100	140	200
1/3 - 3/4	250	350	500	700	920	1200	1600	2000	2500	3200	4200	6600	10,000
1 - 2	180	300	450	660	900	1200	1600	2000	2500	3200	4200	6600	10,000
2 1/2		100	325	570	800	1100	1500	2000	2500	3200	4200	6600	10,000
2 3/4			60	150	600	1000	1400	1800	2400	3200	4200	6600	10,000
3 1/2				90	350	900	1300	1700	2400	3200	4200	6600	10,000
4					120	680	1200	1600	2300	3200	4200	6600	10,000
5 1/2 - 10						180	900	1500	2200	3000	4200	6600	10,000
15							150	800	1800	2700	3800	6500	10,000

Notes: This chart applies to Kearney Type K fuse links coordinated with Type X fuse links. The table is applicable for both Fit-All calbe fuse links and Trip-O-Link fuse links where the former is used in open and enclosed cutouts and the latter in open link cutouts. The chart is recommended for general use under usual conditions of service, subject to the general rule that the ratio of fuse link sizes should be as large as circumstances permit.

Intentionally left blank

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

Eaton's Power Systems Division
2300 Badger Drive
Waukesha, WI 53188
United States
Eaton.com/cooperpowerseries

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. TD325011EN
October 2017

Eaton is a registered trademark.

All trademarks are property
of their respective owners.

For Eaton's Cooper Power series product
information
call 1-877-277-4636 or visit:
www.eaton.com/cooperpowerseries.