


Coordination chart for Kearney type KS fuse links

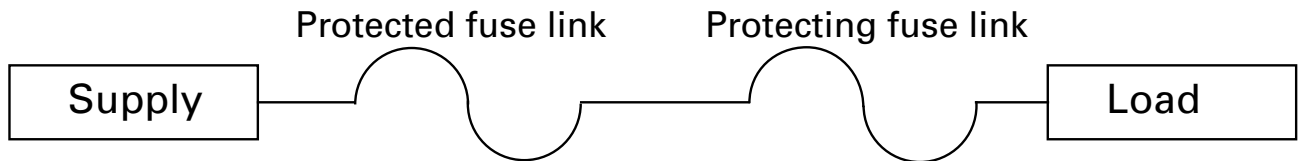

Effective October 2017

Protecting fuse link ampere rating	Protected fuse link ampere rating													
	5	7	10	15	20	25	30	40	50	65	80	100	125	150
Maximum R.M.S. amperes for safe coordination														
1, 2	330	650	1150	1500	1900	2450	3050	3800	5000	6400	7800	10,000	10,000	10,000
3	200	610	1100	1500	1900	2450	3050	3800	5000	6400	7800	10,000	10,000	10,000
5		440	990	1400	1800	2450	3050	3800	5000	6400	7800	10,000	10,000	10,000
7			630	1200	1650	2250	2950	3800	5000	6400	7800	10,000	10,000	10,000
10					1250	1950	2650	3600	4750	6400	7800	10,000	10,000	10,000
15						1550	2400	3300	4650	6200	7800	10,000	10,000	10,000
20							1900	3000	4400	6000	7500	9900	10,000	10,000
25								2350	3900	5500	7100	9600	10,000	10,000
30									3250	5100	6800	9400	10,000	10,000
40										4250	6050	8800	10,000	10,000
50											5000	7950	10,000	10,000
65												6000	9900	10,000
80													8800	10,000
100														9900
125														
150														

Notes: This chart applies to Kearney Type KS fuse links used in Kearney open and enclosed cutouts. It is recommended for general use under usual conditions of service, subject to the general rule that the ratio of fuse link sizes should be used large as circumstances permit.

Intentionally left blank

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

Eaton's Power Systems Division
2300 Badger Drive
Waukesha, WI 53188
United States
Eaton.com/cooperpowerseries

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. TD325006EN
October 2017

Eaton is a registered trademark.

All trademarks are property
of their respective owners.

For Eaton's Cooper Power series product
information
call 1-877-277-4636 or visit:
www.eaton.com/cooperpowerseries.