


NOTES:

1. OPERATOR INTERFACE PANEL.
2. DUAL MAIN INPUT BREAKERS (WITH KIRK KEYS).
3. SOLENOID KEY RELEASE.
4. 225A SECONDARY MAINS.
5. 225A 42P PANELBOARDS.
6. BCMS CT STRIPS (OPTIONAL).
7. BCMS MOTHERBOARD (OPTIONAL).
8. 800A I-LINE PANEL BOARD
9. CAM-LOK A, B, C AND G COOPER E1016-SERIES
10. RECOMMEND 6" CLEARANCE BETWEEN VENTILATED SIDES AND WALL FOR PROPER COOLING.
11. MINIMUM OF 21" CLEARANCE FOR DOORS SWING IN FRONT.
12. MINIMUM OF 32" CLEARANCE FOR DOOR SWING ON RIGHT SIDE.

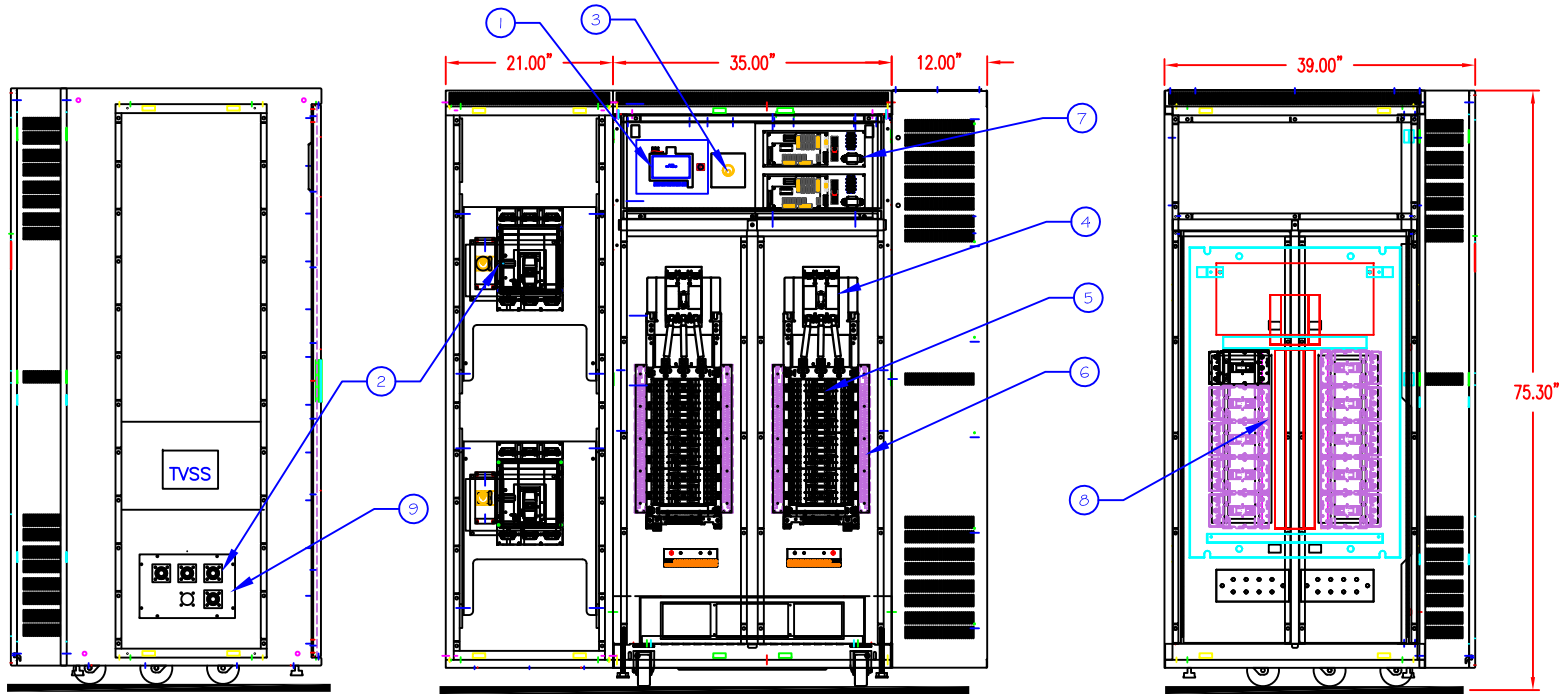

(DOOR AND COVERS REMOVED)

FOR PROPOSAL ONLY  
NOT FOR PRODUCTION

THIS DRAWING CONTAINS CONFIDENTIAL & PROPRIETARY INFORMATION AND SHALL NOT BE DISCLOSED OR COPIED WITHOUT THE EXPRESSED, WRITTEN PERMISSION OF POWER DISTRIBUTION INC.		TITLE		-OUTLINE-	
		MDP FRONT ACCESS 200-300kVA W CAM_LOK (2) 225A 42P PB 800A I-LINEW/ BCMS OPTION			
DWG. NUMBER	SHEET 1 OF 1	REVISION			
MDP18691		-C-			
DRAWN BY	LJN	CHECKED BY		RAE	
DATE	1/18/16	DATE		1/18/16	

