

NOTES:

- 1. OPERATOR INTERFACE PANEL.
- 2. ALLOW A MINIMUM OF 6" CLEARANCE FOR VENTILATION
- 3. ALLOW A MINIMUM OF 22" FOR FRONT DOOR SWING.
- 3. ALLOW A MINIMUM OF 18" FOR REAR INSTALLATION

THIS DRAWING CONTAINS
CONFIDENTIAL & PROPRIETARY
INFORMATION AND SHALL NOT
BE DISCLOSED OR COPIED
WITHOUT THE EXPRESSED,
WRITTEN PERMISSION OF
POWER DISTRIBUTION INC.

-OUTLINE-STATIC TRANSFER SWITCH 1000 AMP STAND ALONE UNIT


1 OF 3

DWG. NUMBER

DWG40028

DRAWN BY K. Harlow | REVISION | -A-



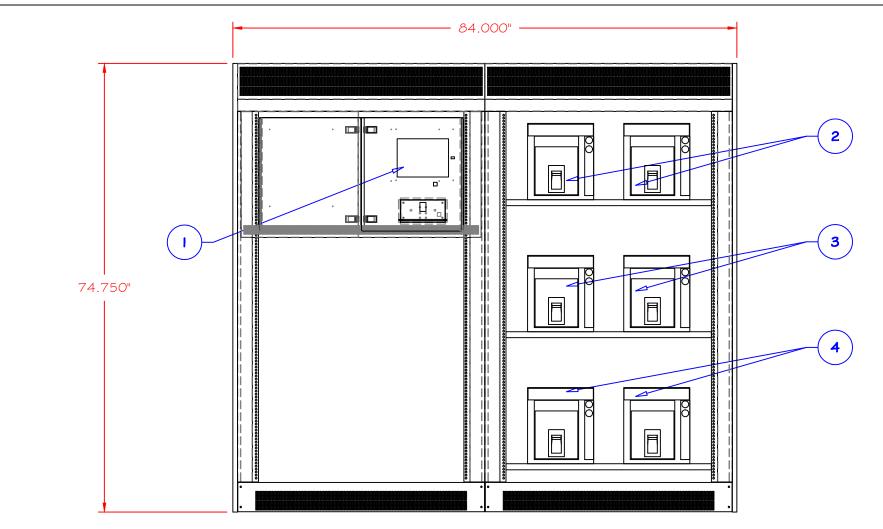

FRONT VIEW
(DOORS & COVERS REMOVED)

NOTES

- 1. OPERATOR INTERFACE PANEL.
- 2. MOLDED CASE INPUT SWITCH.
- 3. MOLDED CASE BYPASS SWITCH.
- 4. MOLDED CASE ISOLATION SWITCH (2nd SWITCH OPTIONAL).

THIS DRAWING CONTAINS CONFIDENTIAL & PROPRIETARY INFORMATION AND SHALL NOT BE DISCLOSED OR COPIED WITHOUT THE EXPRESSED, WRITTEN PERMISSION OF POWER DISTRIBUTION INC.

TITLE	-OUTLINE-
	STATIC TRANSFER SWITCH
	1000 AMP STAND ALONE UN


2 OF 3

DWG. NUMBER

DWG40028

DRAWN BY K. Harlow PREVISION —A—



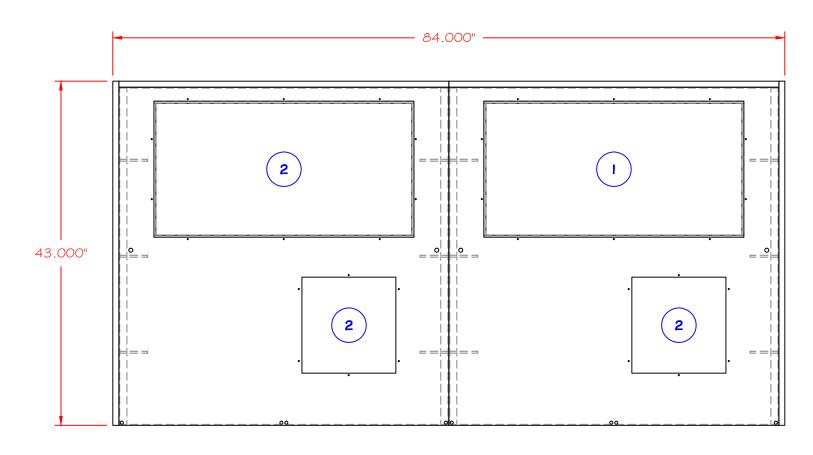

FOOT PRINT

NOTES:

1. CABLE INPUT AREA, TO BE PUNCHED.

2. VENTS FOR COOLING.

THIS DRAWING CONTAINS
CONFIDENTIAL & PROPRIETARY
INFORMATION AND SHALL NOT
BE DISCLOSED OR COPIED
WITHOUT THE EXPRESSED,
WRITTEN PERMISSION OF
POWER DISTRIBUTION INC.

-OUTLINE-
STATIC TRANSFER SWITCH
1000 AMP STAND ALONE UN

3 OF 3

DWG. NUMBER

DWG40028

