



FRONT VIEW
(DOORS AND COVERS REMOVED)

NOTES:

1. OPERATOR INTERFACE PANEL.
2. SCR MODULE.
3. MOLDED CASE INPUT SWITCH/CIRCUIT BREAKER.
4. MOLDED CASE BYPASS SWITCH/CIRCUIT BREAKER.
5. MOLDED CASE ISOLATION SWITCH(2nd SWITCH OPTIONAL).
6. TOP HAT
7. NEUTRAL SWITCHING CONTACTORS.
8. ALLOW 24" MINIMUM CLEARANCE FOR DOOR SWING.
8. RECOMMEND 6" CLEARANCE SIDE FOR COOLING.
8. RECOMMEND 36" CLEARANCE FOR REAR OR LEFT SIDE FOR INSTALLATION

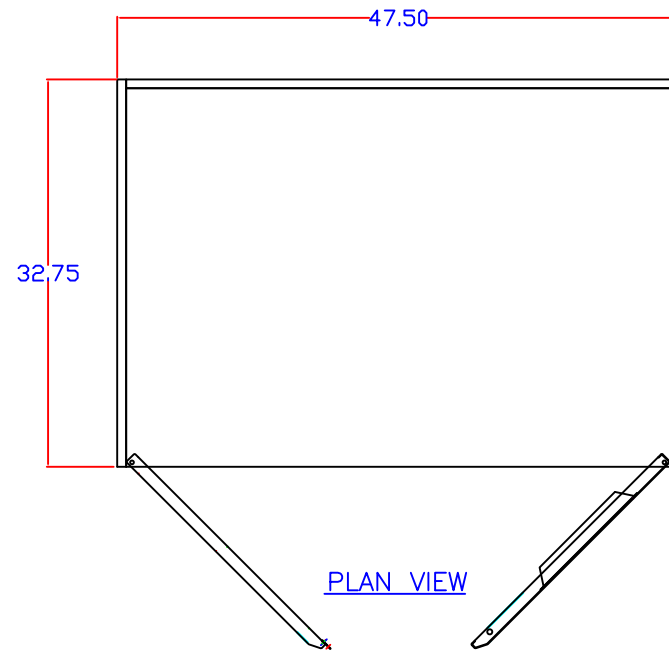

PLAN VIEW

<p>THIS DRAWING CONTAINS CONFIDENTIAL & PROPRIETARY INFORMATION AND SHALL NOT BE DISCLOSED OR COPIED WITHOUT THE EXPRESSED, WRITTEN PERMISSION OF POWER DISTRIBUTION INC.</p>	TITLE		-OUTLINE-
	STATIC TRANSFER SWITCH 250 AMP DUAL SWITCHED NEUTRALS W TOP HAT		
	DWG. NUMBER	1 OF 1	
	DWG40018_TH		
DRAWN BY	LJN	REVISION	
DATE	10/08/15	A	
			 creating the perfect wave