



TW SERIES THRU-WALL BARRIER™ CABLE/CONDUIT SEALING DEVICE

TWP 1, 3, 5, 6, 8 & 9 PLUGS

Installation Instructions

IF-878 7/82

TW THRU-WALL BARRIER Cable/Conduit Sealing Devices consist of TWF Frames assembled with TWB Sealing Block Assemblies. TWP Plugs are for use with TWB Sealing Block Assemblies to close unused openings. Select the TWP Plugs from the following table for use with the TWB Sealing Block Assemblies involved:

TWB Sealing Block Assemblies	TWP Plugs
TWB2111, TWB 1111, TWB2062, TWB2112	TWP1
TWB2063, TWB3054	TWP3
TWB3045, TWB30355	TWP5
TWB4036, TWB40366	TWP6
TWB5028, TWB60288	TWP8
TWB6029	TWP9

Insert the TWP Plug completely into the unused opening in the TWB Sealing Block Assembly. The TWP Plug should be recessed into the openings of the pressure plates of the TWB Sealing Block Assemblies to insure full engagement with elastometric material. (See Figure 1).

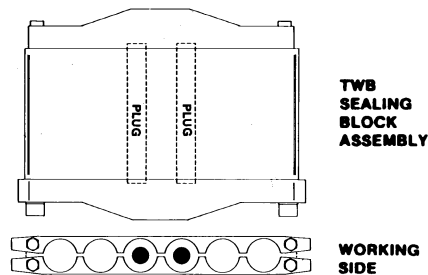


FIGURE 1.
SECTION VIEW SHOWING CORRECT POSITION OF TWP PLUGS

All statements, technical information and recommendations contained herein are based on information and tests we believe to be reliable. The accuracy or completeness thereof are not guaranteed. In accordance with Crouse-Hinds "Terms and Conditions of Sale", and since conditions of use are outside our control, the purchaser should determine the suitability of the product for his intended use and assumes all risk and liability whatsoever in connection herewith.

This instruction sheet should be retained for future use in maintenance.



TW SERIES THRU-WALL BARRIER™ CABLE/CONDUIT SEALING DEVICE

TWP 1, 3, 5, 6, 8 & 9 PLUGS

Installation Instructions

IF-878 7/82

TW THRU-WALL BARRIER Cable/Conduit Sealing Devices consist of TWF Frames assembled with TWB Sealing Block Assemblies. TWP Plugs are for use with TWB Sealing Block Assemblies to close unused openings. Select the TWP Plugs from the following table for use with the TWB Sealing Block Assemblies involved:

TWB Sealing Block Assemblies	TWP Plugs
TWB2111, TWB 1111, TWB2062, TWB2112	TWP1
TWB2063, TWB3054	TWP3
TWB3045, TWB30355	TWP5
TWB4036, TWB40366	TWP6
TWB5028, TWB60288	TWP8
TWB6029	TWP9

Insert the TWP Plug completely into the unused opening in the TWB Sealing Block Assembly. The TWP Plug should be recessed into the openings of the pressure plates of the TWB Sealing Block Assemblies to insure full engagement with elastometric material. (See Figure 1).

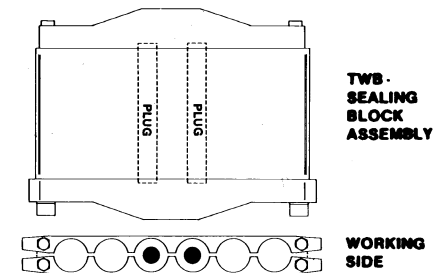


FIGURE 1.
SECTION VIEW SHOWING CORRECT POSITION OF TWP PLUGS

All statements, technical information and recommendations contained herein are based on information and tests we believe to be reliable. The accuracy or completeness thereof are not guaranteed. In accordance with Crouse-Hinds "Terms and Conditions of Sale", and since conditions of use are outside our control, the purchaser should determine the suitability of the product for his intended use and assumes all risk and liability whatsoever in connection herewith.

This instruction sheet should be retained for future use in maintenance.