

SG13811



Description

- High-quality residual current device / miniature circuit breaker combination, line voltage-independent
- Contact position indicator red - green
- Fault current tripping indicator white - blue
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories can be mounted subsequently
- Wide variety of rated tripping currents
- Rated currents up to 40 A
- Tripping characteristics B, C
- Rated breaking capacity 6 kA

$I_p/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
---------------------------	---------------------	-------------	----------------------

Type A**6 kA, 2-pole****Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, type A**

SG13811

**Characteristic B**

25/0.03	PKP62-25/2/B/003-A	113889	1/60
32/0.03	PKP62-32/2/B/003-A	113940	1/60
40/0.03	PKP62-40/2/B/003-A	113941	1/60
25/0.01	PKP62-25/2/B/01-A	113945	1/60
32/0.01	PKP62-32/2/B/01-A	113946	1/60
40/0.01	PKP62-40/2/B/01-A	113947	1/60

SG13811

**Characteristic C**

25/0.03	PKP62-25/2/C/003-A	113942	1/60
32/0.03	PKP62-32/2/C/003-A	113943	1/60
40/0.03	PKP62-40/2/C/003-A	113944	1/60
25/0.01	PKP62-25/2/C/01-A	113948	1/60
32/0.01	PKP62-32/2/C/01-A	113949	1/60
40/0.01	PKP62-40/2/C/01-A	113950	1/60

Type AC**6 kA, 2-pole****Conditionally surge current-proof 250 A, type AC**

SG13811

**Characteristic B**

10/0.03	PKP62-10/2/B/003	111589	1/60
13/0.03	PKP62-13/2/B/003	111590	1/60
16/0.03	PKP62-16/2/B/003	111591	1/60
20/0.03	PKP62-20/2/B/003	111592	1/60
25/0.03	PKP62-25/2/B/003	111593	1/60
32/0.03	PKP62-32/2/B/003	111594	1/60
40/0.03	PKP62-40/2/B/003	111595	1/60

SG13811

**Characteristic C**

6/0.03	PKP62-6/2/C/003	111614	1/60
10/0.03	PKP62-10/2/C/003	111615	1/60
13/0.03	PKP62-13/2/C/003	111616	1/60
16/0.03	PKP62-16/2/C/003	111617	1/60
20/0.03	PKP62-20/2/C/003	111618	1/60
25/0.03	PKP62-25/2/C/003	111619	1/60
32/0.03	PKP62-32/2/C/003	111620	1/60
40/0.03	PKP62-40/2/C/003	111621	1/60

Specifications | Combined RCD/MCB Devices PKP.2, 2-pole**Description**

- Combined RCD/MCB Devices
- Line voltage-independent tripping
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Guide for secure terminal connection
- Switching toggle (MCB component) in colour designating the rated current
- Contact position indicator red - green
- Fault current tripping indicator white - blue
- Comprehensive range of accessories can be mounted subsequently
- The test key "T" must be pressed every 6 month. The system operator must be informed of this obligation and his responsibility in a way that can be proven (self-adhesive RCD-label enclosed). The test interval of 6 month is valid for residential and similar applications. Under all other conditions (e.g. damply or dusty environments), it's recommended to test in shorter intervals (e.g. monthly).
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement (R_E), or proper checking of the earth conductor condition redundant, which must be performed separately.

Accessories:

Tripping signal switch for subsequent installation	ZP-IHK	286052
Shunt trip release	ZP-ASA/..	248438, 248439

Technical Data**PKP.2, 2-pole****Electrical**



Design according to	IEC/EN 61009
Current test marks as printed onto the device	
Line voltage-independent tripping	instantaneous 250 A (8/20 µs), surge current proof
Rated voltage	U_e 230 V AC; 50 Hz
Operational voltage range	196-253 V
Rated tripping current	$I_{\Delta n}$ 30, 100, 300 mA
Rated non-tripping current	$I_{\Delta n0}$ 0.5 $I_{\Delta n}$
Sensitivity	AC and pulsating DC
Selectivity class	3
Rated breaking capacity	I_{cn}
PKPM2	10 kA
PKP62	6 kA
PKP42	4.5 kA
Rated current	6 - 40 A
Rated impulse withstand voltage	U_{imp} 4 kV (1.2/50 µs)
Characteristic	B, C
Maximum back-up fuse (short circuit)	100 A gL (>10 kA)
Endurance	
electrical components	\geq 4,000 switching operations
mechanical components	\geq 20,000 switching operations

Mechanical

Frame size	45 mm
Device height	80 mm
Device width	35 mm (2MU)
Mounting	3-position DIN rail clip, permits removal from existing busbar system
Degree of protection, switch	IP20
Degree of protection, built-in	IP40
Upper and lower terminals	open mouthed/lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1 - 25 mm ²
Terminal torque	2 - 2.4 Nm
Busbar thickness	0.8 - 2 mm
Tripping temperature	-25°C to +40°C
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	according to IEC/EN 61009

Connection diagram

2-pole

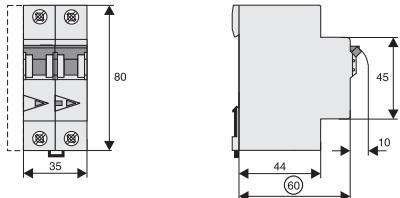**Dimensions (mm)**

PKPM2: Influence of ambient temperature on load carrying capacity


- Values = max. allowed current in Ampere at the specific temperature
- Temperature factor (%/K) = 0.5

		Ambient temperature / °C									
I _n [A]		-40	-30	-25	-20	-10	0	10	20	30	40
6		8.1	7.8	7.7	7.5	7.2	6.9	6.6	6.3	6.0	5.7
10		13.5	13.0	12.8	12.5	12.0	11.5	11.0	10.5	10.0	9.5
13		17.6	16.9	16.6	16.3	15.6	15.0	14.3	13.7	13.0	12.4
16		21.6	20.8	20.4	20.0	19.2	18.4	17.6	16.8	16.0	15.2
20		27.0	26.0	25.5	25.0	24.0	23.0	22.0	21.0	20.0	19.0

PKP62, PKP42: Influence of ambient temperature on load carrying capacity

- Values = max. allowed current in Ampere at the specific temperature
- Temperature factor (%/K) = 0.5

		Ambient temperature / °C									
I _n [A]		-40	-30	-25	-20	-10	0	10	20	30	40
6		8.1	7.8	7.7	7.5	7.2	6.9	6.6	6.3	6.0	5.7
10		13.5	13.0	12.8	12.5	12.0	11.5	11.0	10.5	10.0	9.5
13		17.6	16.9	16.6	16.3	15.6	15.0	14.3	13.7	13.0	12.4
16		21.6	20.8	20.4	20.0	19.2	18.4	17.6	16.8	16.0	15.2
20		27.0	26.0	25.5	25.0	24.0	23.0	22.0	21.0	20.0	19.0
25		33.8	32.5	31.9	31.3	30.0	28.8	27.5	26.3	25.0	23.8
32		43.2	41.6	40.8	40.0	38.4	36.8	35.2	33.6	32.0	30.4
40		54.0	52.0	51.0	50.0	48.0	46.0	44.0	42.0	40.0	38.0

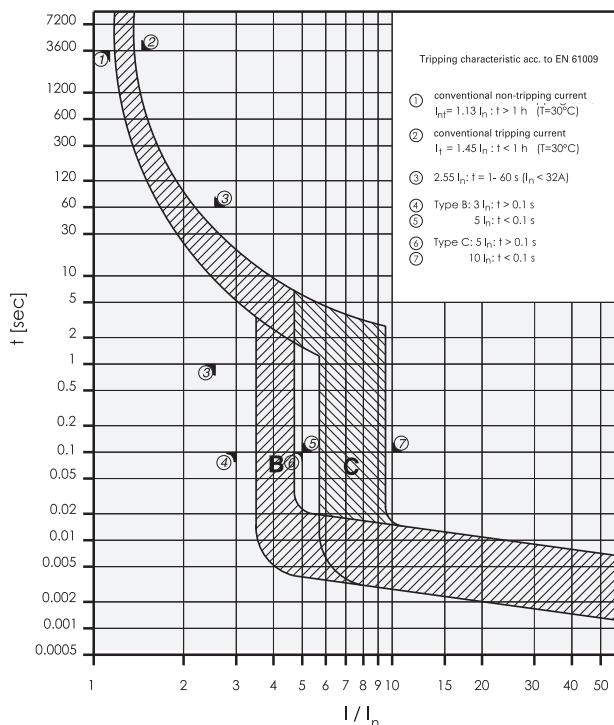Tripping Characteristic PKP.2, Characteristics B and C

Short Circuit Selectivity PKPM2 towards Neozed¹⁾ / Diazed²⁾ / NH00³⁾

Short circuit currents in kA, rated currents of fuses in A

Short circuit selectivity **PKPM2** towards **Neozed** ¹⁾

PKPM2 Neozed ¹⁾										
I_n [A]	16	20	25	32	35	40	50	63	80	100
B10	<0.5	0.5	0.9	2	2.3	3.7	8	10	10	10
B13	<0.5	0.5	0.8	1.7	1.9	3	6	10	10	10
B16		0.5	0.7	1.5	1.7	2.4	4.4	6.8	10	10
B20			0.7	1.4	1.5	2.2	3.9	6	9.2	10
C10	<0.5	0.5	0.8	1.7	1.9	3	6.1	10	10	10
C13	<0.5	0.5	0.7	1.6	1.8	2.8	5.5	9.5	10	10
C16		<0.5	0.7	1.3	1.5	2.2	4	6.2	10	10
C20			0.6	1.3	1.4	2.1	3.7	5.6	8.5	10

Short circuit selectivity **PKPM2** towards **Diazed** ²⁾

PKPM2 Diazed ²⁾										
I_n [A]	16	20	25	32	35	50	63	80	100	
B10	<0.5	0.5	0.9	1.8	2.9	5.6	10	10	10	
B13	<0.5	0.5	0.8	1.5	2.4	4.5	10	10	10	
B16		0.5	0.8	1.3	2	3.4	8	10	10	
B20			0.7	1.3	1.9	3.1	7.1	10	10	
C10	<0.5	0.5	0.8	1.5	2.4	4.4	10	10	10	
C13	<0.5	0.5	0.8	1.4	2.3	4.2	10	10	10	
C16		<0.5	0.7	1.2	1.9	3.2	7.6	10	10	
C20			0.7	1.2	1.8	2.9	6.5	9.7	10	

Short circuit selectivity **PKPM2** towards **NH00** ³⁾

PKPM2 NH00 ³⁾												
I_n [A]	16	20	25	32	35	40	50	63	80	100	125	160
B10	<0.5	<0.5	0.8	1.5	2.3	3.2	5.7	9.1	10	10	10	10
B13	<0.5	<0.5	0.8	1.3	1.9	2.7	4.4	6.5	10	10	10	10
B16		<0.5	0.7	1.1	1.6	2.2	3.4	4.8	8	10	10	10
B20			0.6	1	1.4	2	3.1	4.3	7	10	10	10
C10	<0.5	<0.5	0.7	1.3	1.9	2.7	4.5	6.9	10	10	10	10
C13	<0.5	<0.5	0.7	1.2	1.8	2.5	4.1	6.1	10	10	10	10
C16		<0.5	0.6	1	1.5	2	3.1	4.4	7.5	10	10	10
C20			0.6	0.9	1.4	1.9	2.9	4.1	6.5	10	10	10

Darker areas: no selectivity

¹⁾ SIEMENS Type 5SE2; Size: D01, D02, D03; Operating class gG; Rated voltage: AC 400 V/DC 250 V²⁾ SIEMENS Type 5SB2, 5SB4, 5SC2; Size: DII, DIII, DIV; Operating class gG; Rated voltage: AC 500 V/DC 500 V³⁾ SIEMENS Type 3NA3 8, 3NA6 8, 3NA7 8; Size: 000, 00; Operating class gG; Rated voltage: AC 500 V/DC 250 V

Short Circuit Selectivity PKP62 towards Neozed¹⁾ / Diazed²⁾ / NH00³⁾

Short circuit currents in kA, rated currents of fuses in A

Short circuit selectivity **PKP62** towards **Neozed** ¹⁾

PKP62	Neozed ¹⁾									
I_n [A]	16	20	25	32	35	40	50	63	80	100
B10	<0.5	0.5	0.9	2	2.3	3.7	6	6	6	6
B13	<0.5	0.5	0.8	1.7	1.9	3	6	6	6	6
B16		0.5	0.7	1.5	1.7	2.4	4.4	6	6	6
B20			0.7	1.4	1.5	2.2	4	6	6	6
B25				1.2	1.3	1.8	3.1	4.7	6	6
B32					1.2	1.7	2.7	3.8	5.5	6
B40						1.3	1.7	2.2	2.7	4.2
C10	<0.5	0.5	0.8	1.7	1.9	3	6	6	6	6
C13	<0.5	0.5	0.7	1.6	1.8	2.8	5.5	6	6	6
C16		<0.5	0.7	1.3	1.5	2.2	4	6	6	6
C20			0.6	1.3	1.4	2.1	3.7	5.6	6	6
C25				1.1	1.3	1.8	2.8	3.9	5.6	6
C32					1.2	1.7	2.6	3.6	5.1	6
C40						1.3	1.9	3.3	3.2	5.8

Short circuit selectivity **PKP62** towards **Diazed** ¹⁾

PKP62	Diazed ²⁾									
I_n [A]	16	20	25	32	35	50	63	80	100	
B10	<0.5	0.5	0.9	1.8	2.9	5.6	6	6	6	
B13	<0.5	0.5	0.8	1.5	2.4	4.5	6	6	6	
B16		0.5	0.8	1.3	2	3.4	6	6	6	
B20			0.7	1.3	1.9	3.1	6	6	6	
B25				1.1	1.5	2.4	5.5	6	6	
B32					1.4	2.1	4.3	6	6	
B40						1.4	2.4	2.9	5.1	
C10	<0.5	0.5	0.8	1.5	2.4	4.4	6	6	6	
C13	<0.5	0.5	0.8	1.4	2.3	4.2	6	6	6	
C16		<0.5	0.7	1.2	1.9	3.2	6	6	6	
C20			0.7	1.2	1.8	2.9	6	6	6	
C25				1.1	1.5	2.3	4.4	6	6	
C32					1.4	2.2	4.1	5.6	6	
C40						1.6	2.8	3.6	6	

Short circuit selectivity **PKP62** towards **NH00** ³⁾

PKP62	NH00 ³⁾											
I_n [A]	16	20	25	32	35	40	50	63	80	100	125	160
B10	<0.5	<0.5	0.8	1.5	2.3	3.2	5.7	6	6	6	6	6
B13	<0.5	<0.5	0.8	1.3	1.9	2.7	4.4	6	6	6	6	6
B16		<0.5	0.7	1.1	1.6	2.2	3.4	4.8	6	6	6	6
B20			0.6	1	1.4	2	3.1	4.3	6	6	6	6
B25				0.9	1.2	1.6	2.4	3.4	5.5	6	6	6
B32					1.1	1.4	2.1	2.9	4.3	6	6	6
B40						1.4	1.9	2.8	4.1	6	6	6
C10	<0.5	<0.5	0.7	1.3	1.9	2.7	4.5	6	6	6	6	6
C13	<0.5	<0.5	0.7	1.2	1.8	2.5	4.1	6	6	6	6	6
C16		<0.5	0.6	1	1.5	2	3.1	4.4	6	6	6	6
C20			0.6	0.9	1.4	1.9	2.9	4.1	6	6	6	6
C25				0.9	1.2	1.6	2.3	3	4.6	6	6	6
C32					1.1	1.5	2.1	2.8	4.3	6	6	6
C40						1.5	2.1	3.1	5.4	6	6	6

Darker areas: no selectivity

¹⁾ SIEMENS Type 5SE2; Size: D01, D02, D03; Operating class gG; Rated voltage: AC 400 V/DC 250 V²⁾ SIEMENS Type 5SB2, 5SB4, 5SC2; Size: DII, DIII, DIV; Operating class gG; Rated voltage: AC 500 V/DC 500 V³⁾ SIEMENS Type 3NA3 8, 3NA6 8, 3NA7 8; Size: 000, 00; Operating class gG; Rated voltage: AC 500 V/DC 250 V

Short Circuit Selectivity PKP42 towards Neozed¹⁾ / Diazed²⁾ / NH00³⁾

Short circuit currents in kA, rated currents of fuses in A

Short circuit selectivity **PKP42** towards **Neozed** ¹⁾

PKP42	Neozed ¹⁾									
I_n [A]	16	20	25	32	35	40	50	63	80	100
B10	<0.5	0.5	0.9	2	2.3	3.7	4.5	4.5	4.5	4.5
B13	<0.5	0.5	0.8	1.7	1.9	3	4.5	4.5	4.5	4.5
B16		0.5	0.7	1.5	1.7	2.4	4.4	4.5	4.5	4.5
B20			0.7	1.4	1.5	2.2	4	4.5	4.5	4.5
B25				1.2	1.3	1.8	3.1	4.7	4.5	4.5
B32					1.2	1.7	2.7	3.8	4.5	4.5
B40						1.3	1.7	2.2	2.7	4.2
C10	<0.5	0.5	0.8	1.7	1.9	3	4.5	4.5	4.5	4.5
C13	<0.5	0.5	0.7	1.6	1.8	2.8	4.5	4.5	4.5	4.5
C16		<0.5	0.7	1.3	1.5	2.2	4	4.5	4.5	4.5
C20			0.6	1.3	1.4	2.1	3.7	4.5	4.5	4.5
C25				1.1	1.3	1.8	2.8	3.9	4.5	4.5
C32					1.2	1.7	2.6	3.6	4.5	4.5
C40						1.3	1.9	3.3	3.2	4.5

Short circuit selectivity **PKP42** towards **Diazed** ¹⁾

PKP42	Diazed ²⁾									
I_n [A]	16	20	25	32	35	50	63	80	100	
B10	<0.5	0.5	0.9	1.8	2.9	4.5	4.5	4.5	4.5	4.5
B13	<0.5	0.5	0.8	1.5	2.4	4.5	4.5	4.5	4.5	4.5
B16		0.5	0.8	1.3	2	3.4	4.5	4.5	4.5	4.5
B20			0.7	1.3	1.9	3.1	4.5	4.5	4.5	4.5
B25				1.1	1.5	2.4	4.5	4.5	4.5	4.5
B32					1.4	2.1	4.3	4.5	4.5	4.5
B40						1.4	2.4	2.9	4.5	4.5
C10	<0.5	0.5	0.8	1.5	2.4	4.4	4.4	4.5	4.5	4.5
C13	<0.5	0.5	0.8	1.4	2.3	4.2	4.5	4.5	4.5	4.5
C16		<0.5	0.7	1.2	1.9	3.2	4.5	4.5	4.5	4.5
C20			0.7	1.2	1.8	2.9	4.5	4.5	4.5	4.5
C25				1.1	1.5	2.3	4.4	4.5	4.5	4.5
C32					1.4	2.2	4.1	4.5	4.5	4.5
C40						1.6	2.8	3.6	4.5	4.5

Short circuit selectivity **PKP42** towards **NH00** ³⁾


PKP42	NH00 ³⁾											
I_n [A]	16	20	25	32	35	40	50	63	80	100	125	160
B10	<0.5	<0.5	0.8	1.5	2.3	3.2	4.5	4.5	4.5	4.5	4.5	4.5
B13	<0.5	<0.5	0.8	1.3	1.9	2.7	4.4	4.5	4.5	4.5	4.5	4.5
B16		<0.5	0.7	1.1	1.6	2.2	3.4	4.5	4.5	4.5	4.5	4.5
B20			0.6	1	1.4	2	3.1	4.3	4.5	4.5	4.5	4.5
B25				0.9	1.2	1.6	2.4	3.4	4.5	4.5	4.5	4.5
B32					1.1	1.4	2.1	2.9	4.3	4.5	4.5	4.5
B40						1.4	1.9	2.8	4.1	4.5	4.5	4.5
C10	<0.5	<0.5	0.7	1.3	1.9	2.7	4.5	4.5	4.5	4.5	4.5	4.5
C13	<0.5	<0.5	0.7	1.2	1.8	2.5	4.1	4.5	4.5	4.5	4.5	4.5
C16		<0.5	0.6	1	1.5	2	3.1	4.4	4.5	4.5	4.5	4.5
C20			0.6	0.9	1.4	1.9	2.9	4.1	4.5	4.5	4.5	4.5

Darker areas: no selectivity


¹⁾ SIEMENS Type 5SE2; Size: D01, D02, D03; Operating class gG; Rated voltage: AC 400 V/DC 250 V²⁾ SIEMENS Type 5SB2, 5SB4, 5SC2; Size: DII, DIII, DIV; Operating class gG; Rated voltage: AC 500 V/DC 500 V³⁾ SIEMENS Type 3NA3 8, 3NA6 8, 3NA7 8; Size: 000, 00; Operating class gG; Rated voltage: AC 500 V/DC 250 V

Let-through Energy PKP2-../2


Let-through Energy PKPM2, Characteristic B, 2-pole

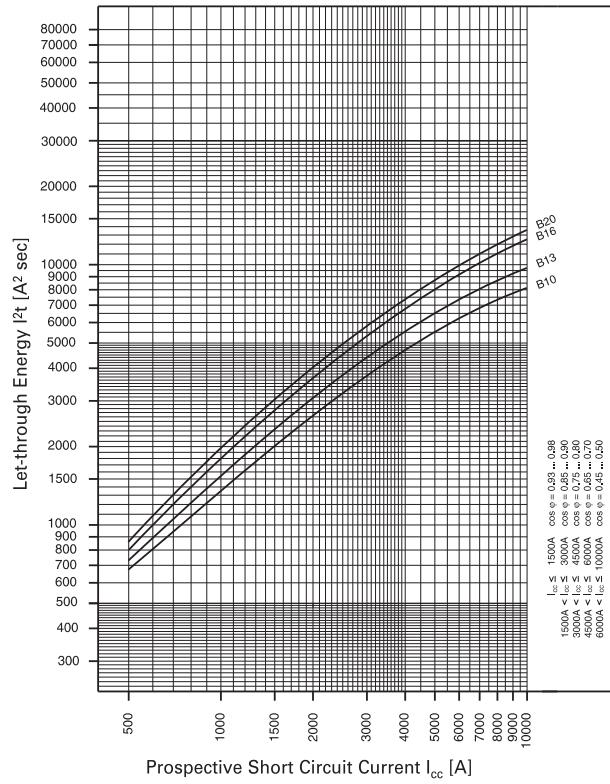


Let-through Energy PKPM2, Characteristic C, 2-pole

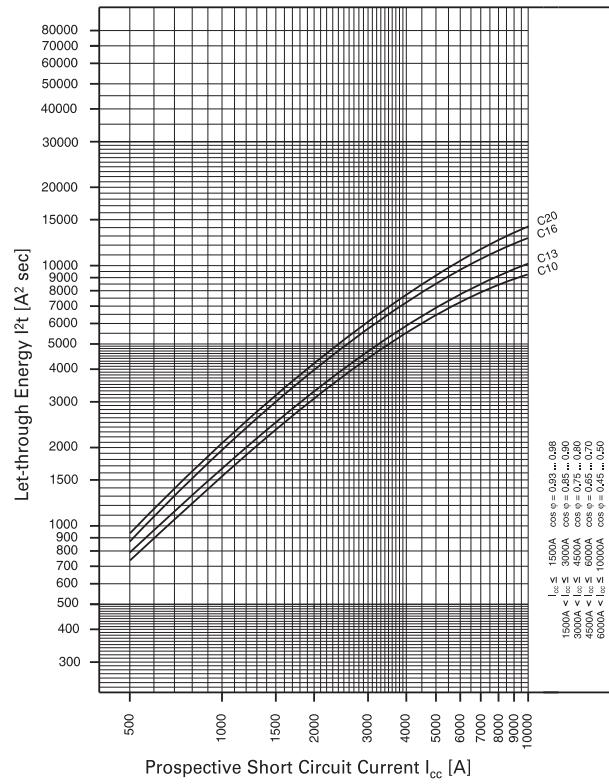


Let-through Energy PKP62, Characteristic B, 2-pole

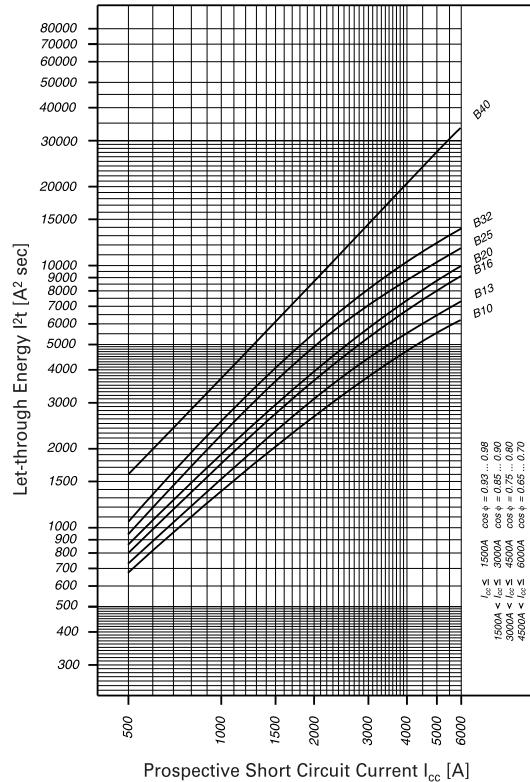

Let-through Energy PKP62, Characteristic C, 2-pole

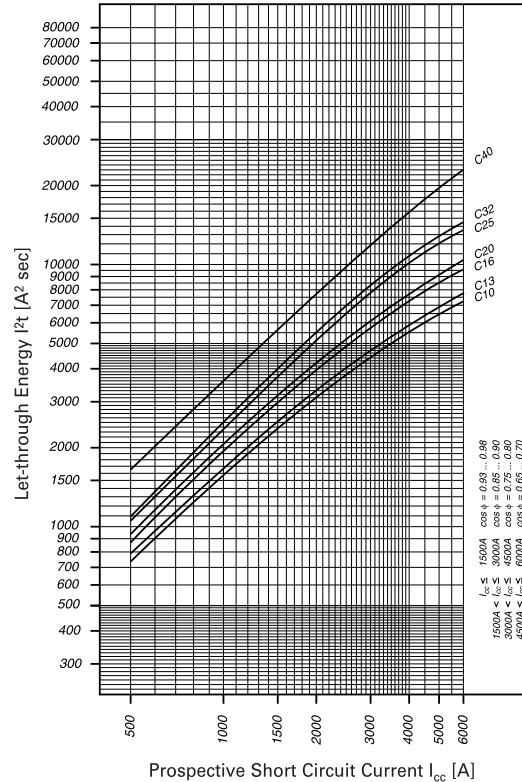

Let-through Energy PKP42, Characteristic B, 2-pole

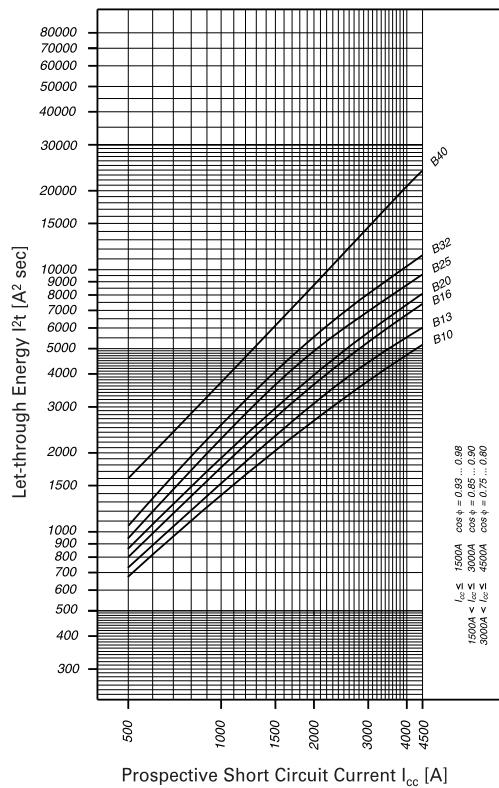

Let-through Energy PKP42, Characteristic C, 2-pole

