

SG65212



Description

- High-quality miniature circuit breakers for commercial and household applications
- Contact position indicator red - green
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 50 A
- Tripping characteristic C
- Rated breaking capacity 10 kA according to IEC/EN 60947-2
- Up to 250 V DC per pole

Miniature Circuit Breakers mCMDC for direct current application

Rated current I_n (A)	Type Designation	Article No.	Units per package
----------------------------	---------------------	-------------	----------------------

10 kA, Characteristic C

SG66212



1-pole

1	mCMDC-C1/1	168552	12/120
2	mCMDC-C2/1	129624	12/120
4	mCMDC-C4/1	129625	12/120
6	mCMDC-C6/1	129626	12/120
10	mCMDC-C10/1	129627	12/120
13	mCMDC-C13/1	129628	12/120
16	mCMDC-C16/1	129629	12/120
20	mCMDC-C20/1	129630	12/120
25	mCMDC-C25/1	129631	12/120
32	mCMDC-C32/1	129632	12/120
40	mCMDC-C40/1	129633	12/120
50	mCMDC-C50/1	129634	12/120

SG66012



2-pole

1	mCMDC-C1/2	168553	1/60
2	mCMDC-C2/2	129635	1/60
3	mCMDC-C3/2	168564	1/60
4	mCMDC-C4/2	129636	1/60
6	mCMDC-C6/2	129637	1/60
10	mCMDC-C10/2	129638	1/60
13	mCMDC-C13/2	129639	1/60
16	mCMDC-C16/2	129640	1/60
20	mCMDC-C20/2	129641	1/60
25	mCMDC-C25/2	129642	1/60
32	mCMDC-C32/2	129643	1/60
40	mCMDC-C40/2	129644	1/60
50	mCMDC-C50/2	129645	1/60

Specifications | Miniature Circuit Breakers mMCMDC

Description

- High selectivity between MCB and back-up fuse due to low let-through energy
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Meets the requirements of insulation co-ordination, distance between contacts ≥ 4 mm, for secure isolation
- Rated breaking capacity 10 kA according to IEC/EN 60947
- Rated voltage to 250 V (per pole), $\tau = 4$ ms
- Take into account polarity!

Accessories:


Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal switch for subsequent installation	ZP-NHK	248437
Remote control and automatic switching device	Z-FW/LP	248296
Shunt trip release	ZP-ASA/..	248438, 248439
Undervoltage release	Z-USA/..	248288-248291
Compact enclosure	KLV-TC-2	276240
	KLV-TC-4	276241
Additional terminal 35 mm ²	Z-HA-EK/35	263960
Switching interlock	Z-IS/SPE-1TE	274418

Technical Data


	mMCMDC	
Electrical		
Design according to	IEC/EN 60947-2	
Current test marks as printed onto the device		
Rated voltage DC	1-2 A types: 220 V (per pole) 3-50 A types: 250 V (per pole)	
Rated frequency	50/60 Hz	
Rated breaking capacity according to IEC/EN 60947-2	10 kA	
Characteristic	C	
Back-up fuse	max. 100 A gL	
Selectivity class	3	
Rated impulse withstand voltage	U_{imp}	4 kV (1.2/50 μ s)
Endurance		
electrical components	$\geq 4,000$ switching operations	
mechanical components	$\geq 20,000$ switching operations	
Line voltage connection	at will (above/below)	
Mechanical		
Frame size	45 mm	
Device height	80 mm	
Device width	17.5 mm per pole (1MU)	
Mounting	quick fastening with 3 lock-in positions on DIN rail IEC/EN 60715	
Degree of protection	IP20	
Upper and lower terminals	open mouthed/lift terminals	
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274	
Terminal capacity	1-25 mm ²	
Terminal torque	2-2.4 Nm	
Busbar thickness	0.8 - 2 mm	
Mounting	independent of position	

Note: not for PV string protection!

Connection diagrams




Dimensions (mm)

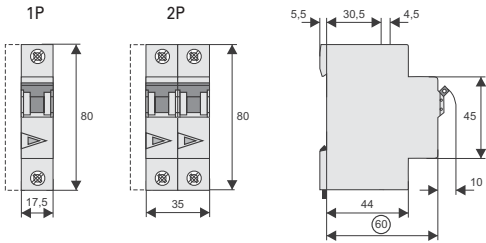


Connection examples

Connection example at 250 V=, 1-pole

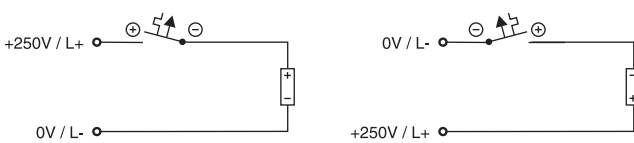


Connection example at 500 V=, 2-pole

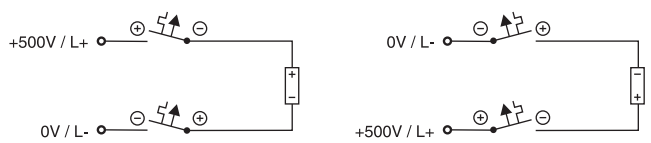

Tripping characteristic mMCMDC

Type C

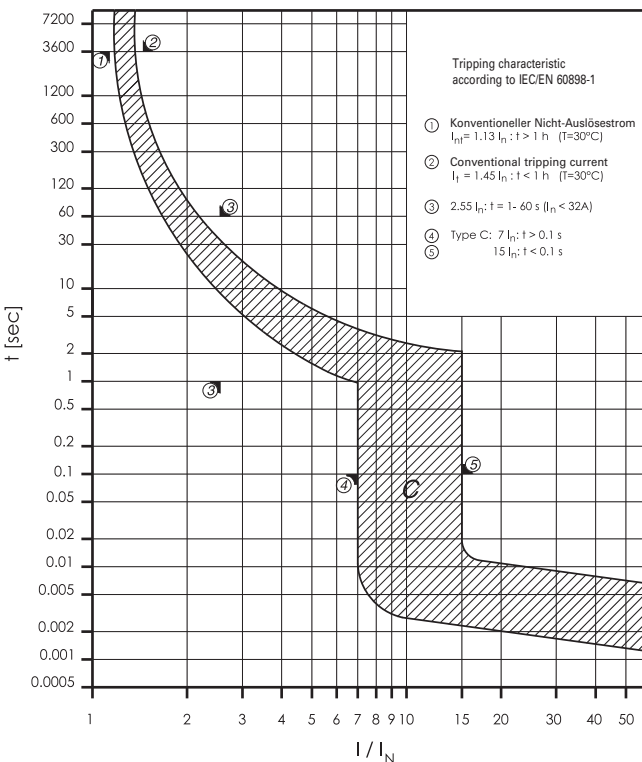

Let-through Energy mMCMDC

Type C, 250 V d.c., $\tau = 5$ ms (according to IEC/EN 60947-2)

