



Power Xpert Release (PXR) electronic trip units


MCCB PXR 25 trip unit

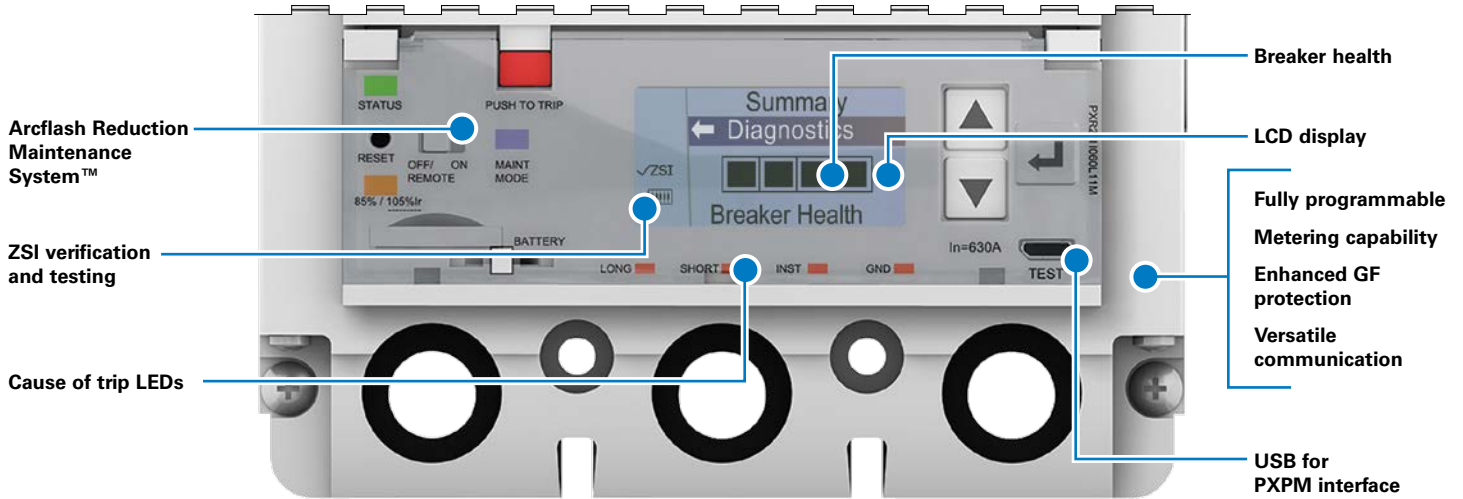

MCCB PXR 10

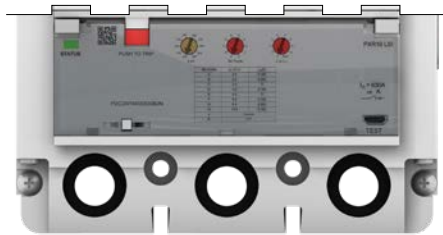

MCCB PXR 20

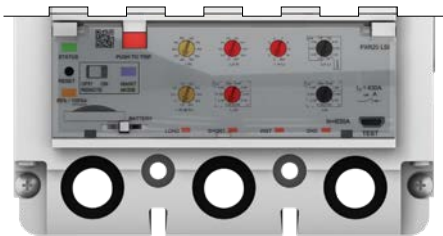

MCCB PXR features

Features	PXR 10	PXR 20	PXR 25
Protection types	LSI	LSI/LSIG	LSI/LSIG
Status indication	●	●	●
USB secondary injection testing	●	●	●
Programmable by USB port (PXPM)	●	●	●
Independent instantaneous adjustment	●	●	●
Adjustable L, S, I, G pickup and time		●	●
Cause of trip indication	▲	●	●
Load alarm indication with 2 levels		●	●
Programmable load alarm levels			●
Ground fault protection and alarm		○	○
Arcflash Reduction Maintenance System		○	○
Available PD3, PD4, PD5, PD6 to meet NEC 240.87 requirements			
Zone selective interlocking (ZSI) with indication		○	○
Programmable relays		○	●
Modbus® RTU communication		○	●
CAM module communication		○	○
Rotatable LCD display			●
Breaker health and diagnostic monitoring		▲	●
Current metering accuracy		2.0%	0.5%
Voltage metering accuracy			0.5%
Power and energy metering accuracy			1.0%

● Standard ○ Optional ▲ Available through USB port (PXPM)



Eaton
 1000 Eaton Boulevard
 Cleveland, OH 44122
 United States
 Eaton.com

© 2024 Eaton
 All Rights Reserved
 Printed in USA
 Publication No. PA012024EN / Z28205
 January 2024

Follow us on social media to get the latest product and support information.



Eaton is a registered trademark.

All other trademarks are property of their respective owners.