

# EREC3006AL

## Hyperfast soft recovery rectifier



Photo is representative


### Product features

- Plastic package UL 94V-0
- Low reverse leakage current
- Hyperfast recovery time and soft recovery characteristics
- Low recovery loss
- Insulation (2500 Vrms) allows placement on same heatsink as MOSFET and flexible heatsinking on common or separate heatsink

### Mechanical data

- Case: TO-220A-2L molded plastic over passivated junction
- Terminals: Tin plated
- Weight: 2.1 gram typical

### Package diagram/size and schematic



TO-220A-2L

### Applications

- Discontinuous current mode (DCM) power factor correction (PFC)
- Active PFC in air conditioners
- Switched-mode power supplies
- DC/DC converters

### Environmental compliance and general specifications



### Ordering part number

E	R	E	C	30	06	AL
1	2	3	4	5	6	7

1	E=Eaton
2	R=Rectifier
3	E=Epitaxial process
4	C=Hyperfast
5	30= $I_T(AV)$ : 30 A
6	06= $V_{RRM}$ : 600 V
7	AL=Package: TO-220A-2L

### Absolute maximum ratings

(Rating at +25 °C ambient temperature unless otherwise specified)

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	$V_{RRM}$	600	V
Maximum RMS voltage	$V_{RMS}$	420	V
Maximum DC blocking voltage	$V_{DC}$	600	V
Average forward current at $T_{mb} \leq 90$ °C	$I_{F(AV)}$	30	A
Peak forward surge current: 10 ms single half sinewave superimposed on rated load	$I_{FSM}$	200	A
Peak forward surge current: 8.3 ms single half sinewave superimposed on rated load		220	
Operating junction and storage temperature range	$T_j, T_{stg}$	-55 to +150	°C

### Electrical characteristics


(Rating at +25 °C ambient temperature unless otherwise specified)

Parameter	Test condition	Symbol	Minimum	Typical	Maximum	Unit
Forward voltage @ $I_F=30$ A	$T_j=25$ °C	$V_F$	-	2	2.75	V
	$T_j=150$ °C		-	1.38	1.8	
Reverse current at rated DC blocking voltage	$T_j=25$ °C	$I_R$	-	-	5	µA
	$T_j=150$ °C		-	-	400	
Reverse recovery time	$I_F=1$ A, $V_R=30$ V, $dI_F/dt=50$ A/µs, $T_j=25$ °C	$t_{rr}$	-	-	35	ns
	$I_F=30$ A, $V_R=200$ V, $dI_F/dt=200$ A/µs, $T_j=25$ °C		-	35	-	
	$I_F=30$ A, $V_R=200$ V, $dI_F/dt=200$ A/µs, $T_j=125$ °C		-	70	-	
Peak reverse recovery current	$I_F=30$ A, $V_R=200$ V, $dI_F/dt=200$ A/µs, $T_j=25$ °C	$I_{RM}$	-	3.5	-	A
	$I_F=30$ A, $V_R=200$ V, $dI_F/dt=200$ A/µs, $T_j=125$ °C		-	7.6	-	
Reverse recovery charge	$I_F=30$ A, $V_R=200$ V, $dI_F/dt=200$ A/µs, $T_j=25$ °C	$Q_{rr}$	-	50	-	nC
	$I_F=30$ A, $V_R=200$ V, $dI_F/dt=200$ A/µs, $T_j=125$ °C		-	280	-	
RMS isolation voltage	50 Hz ≤ $f$ ≤ 60 Hz; $RH$ ≤ 65%; from all pins to external heat-sink; sinusoidal waveform; clean and dust free	$V_{isol}(RMS)$	-	-	2500	V
Isolation capacitance	from cathode to external heatsink	$C_{isol}$	-	10	-	pF

### Thermal resistances

Symbol	Parameter	Minimum	Typical	Maximum	Unit
$R_{th(j-a)}$	Thermal resistance from junction to ambient	-	60	-	°C /W
$R_{th(j-mb)}$	Thermal resistance from junction to mounting base	-	-	2.1	°C /W

**Mechanical drawing- mm**

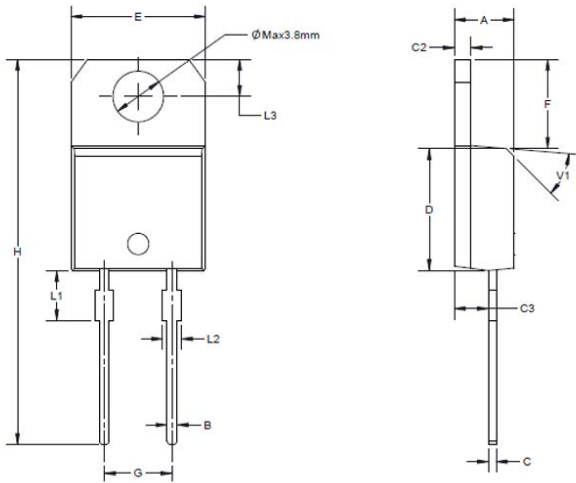

Dimension	Minimum	Typical	Maximum
A	4.4	-	4.6
B	0.61	-	0.88
C	0.46	-	0.7
C2	1.21	-	1.32
C3	2.4	-	2.72
D	8.6	-	9.7
E	9.8	-	10.4
F	6.55	-	6.95
G	-	5.08	-
H	28	-	29.8
L1	-	3.75	-
L2	1.14	-	1.7
L3	2.65	-	2.95
V1	-	45°	-

**Marking**



**Product information**


C	Hyperfast
30	$I_{F(AV)}$ : 30 A
06	$V_{RRM}$ : 600 V
AL	Package: TO-220A-2L
F35	Date code

**Packaging information**


Outline	Unit weight (g/pcs) typical	Tube (pcs)	Per carton (pcs)
TUBE	2.1	50	5,000

**Typical characteristics**


**Typical forward characteristics**

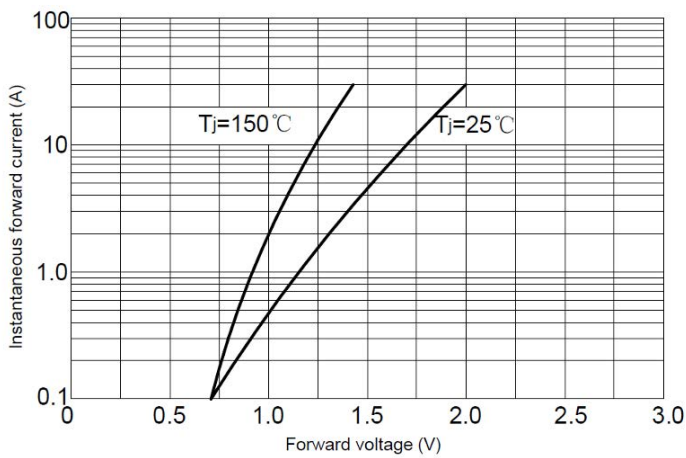


**Typical reverse characteristics**

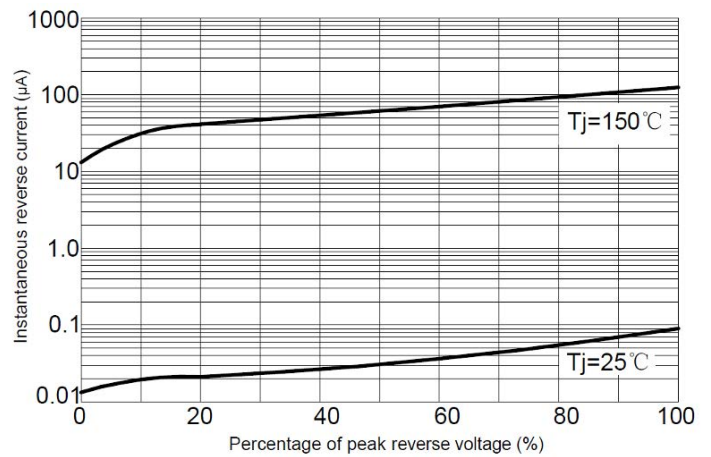

**Maximum non-repetitive peak forward surge current (10 ms single half sine-wave) (+25 °C)**

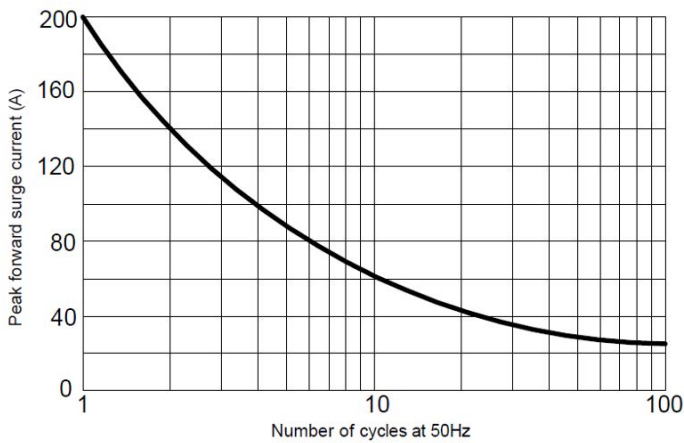


**Maximum non-repetitive peak forward surge current (8.3 ms single half sine-wave) (+25 °C)**

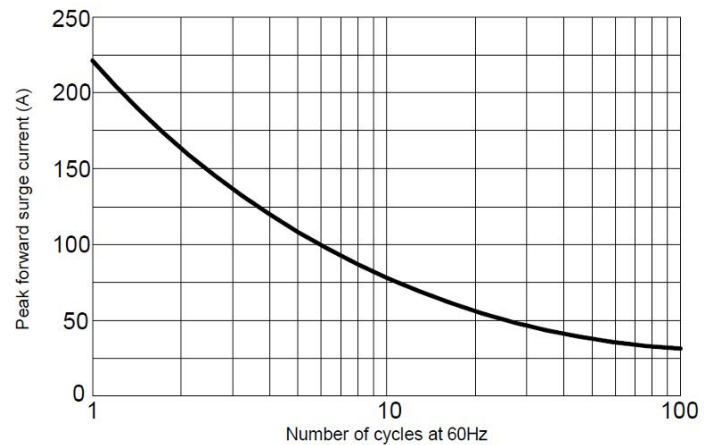


**Typical characteristics**

**Forward current derating curve**

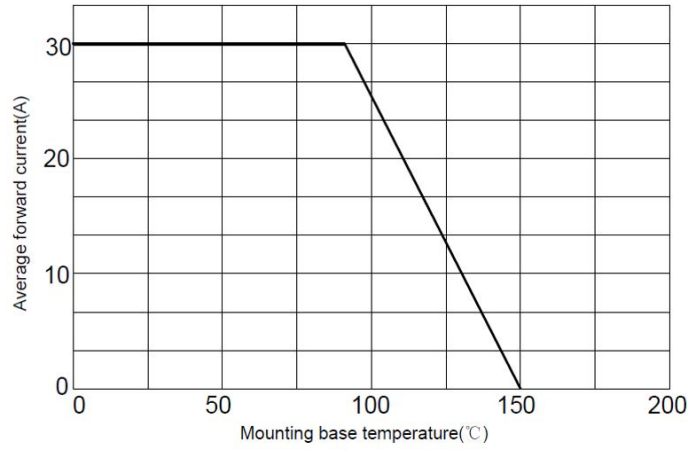

### Wave solder profile

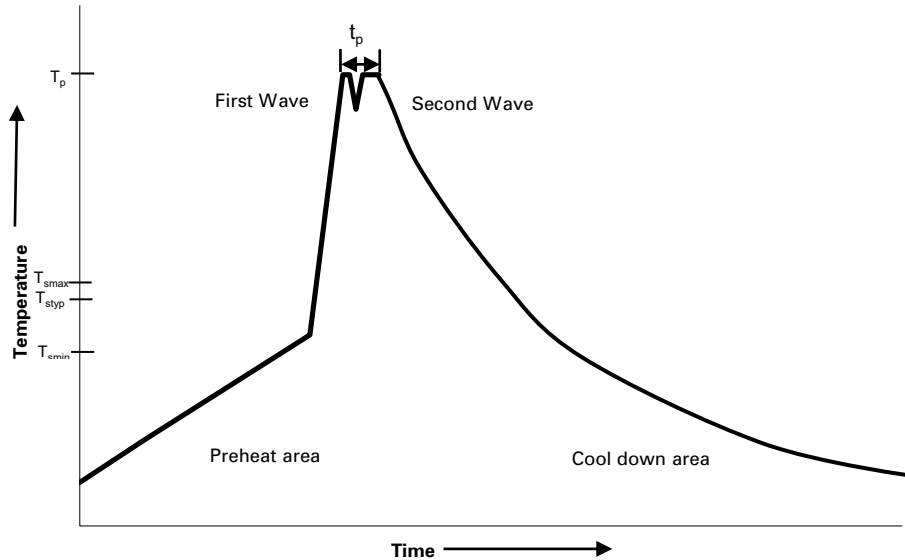

### Reference EN 61760-1:2006

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat		
• Temperature min. ( $T_{smin}$ )	100 °C	100 °C
• Temperature typ. ( $T_{styp}$ )	120 °C	120 °C
• Temperature max. ( $T_{smax}$ )	130 °C	130 °C
• Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )	70 seconds	70 seconds
$\Delta$ preheat to max Temperature	150 °C max.	150 °C max.
Peak temperature ( $T_p$ )*	235 °C – 260 °C	250 °C – 260 °C
Time at peak temperature ( $t_p$ )	10 seconds max 5 seconds max each wave	10 seconds max 5 seconds max each wave
Ramp-down rate	~ 2 K/s min ~3.5 K/s typ ~5 K/s max	~ 2 K/s min ~3.5 K/s typ ~5 K/s max
Time 25 °C to 25 °C	4 minutes	4 minutes

### Manual solder

Use a 20 watt soldering iron with tip diameter of 1.0 mm maximum. +350 °C, 4-5 seconds maximum, generally manual, hand soldering is not recommended

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com/electronics

© 2023 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. ELX1348 BU-ELX22214  
July 2023

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

