

LOFMET™ titanium and stainless steel filter cartridges

Eaton's LOFMET filter cartridges are designed for a variety of applications including corrosive liquids and gases, cryogenic fluids, high viscosity solutions, process steam, high temperature liquids and gases and catalyst recovery.

Porous titanium or stainless steel 316 filter cartridges are designed for applications involving extreme operating conditions and aggressive fluids and gases. The rugged, fixed pore structure is constructed from sintered titanium powder. The result is a filter element that can withstand heat, high pressures and repeated cleaning/backwash cycles. Mechanical strength and corrosion resistance are the results of a seamless design.

Features and benefits

- High corrosion resistance
- All sintered titanium or stainless steel 316 construction
- Backwashable for reuse and maximum economy
- Multiple end configurations and gasket/o-rings to fit most filter housings

Design

Filter materials

Titanium or stainless steel 316

End caps

Titanium or stainless steel 316

Gaskets/O-rings

EPDM, Buna-N, silicone, FPM, FEP encapsulated (O-Rings only), PTFE (gasket only)

Retention ratings

0.5, 1, 5, 10, 15, 35, 50, 100 μm
@ 99.5% efficiency

Technical data

Nominal lengths

5", 9.75", 10", 20", 30", 40"
(127, 248, 254, 508, 762, 1016 mm)

Outside diameter

2.36" (60 mm); 2.48" (63 mm)

Max. operating temperature

700 °F (371 °C)*

Max. differential pressures

250 psid (17.4 bar) forward
50 psid (3.5 bar) reverse

* Max. temperature applicable to NPT style filters only (no O-rings or gaskets). Consult Eaton for guidance on specific chemical/temperature compatibility.




Powering Business Worldwide

LOFMET filter cartridges


Flow rate*

(70°F/21°C per 10" filter cartridge for water)

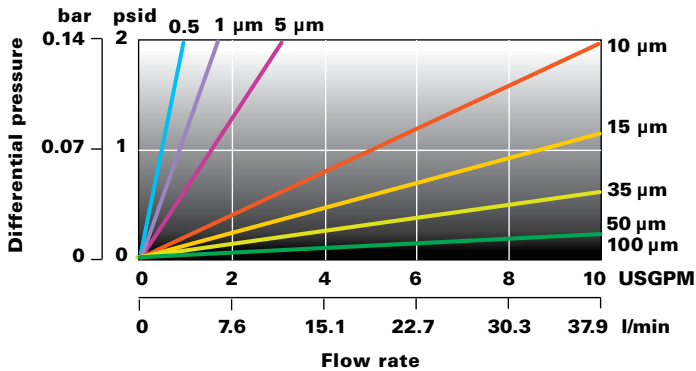

* For liquids other than water, multiply pressure drop by fluid viscosity in centipoise.

Ordering code

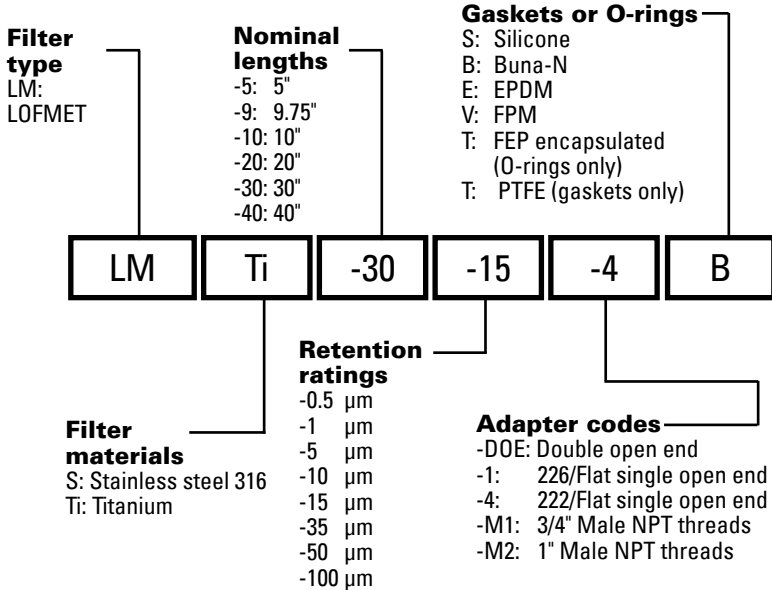

Efficiency of retention

Beta ratio retention of efficiency	Beta 200 99.5%	Beta 20 95%	Beta 10 90%
0.5 µm	0.5	0.3	0.1
1 µm	1	0.8	0.4
5 µm	5	3	1
10 µm	10	8	5
15 µm	15	12	10
35 µm	35	32	28

$$\text{Beta ratio} = \frac{\text{Upstream particle counts}}{\text{Downstream particle counts}}$$

The micron ratings shown at various efficiency and beta ratio value levels were determined through laboratory testing, and can be used as a guide for selecting cartridges and estimating their performance. Under actual field conditions, results may vary somewhat from the values shown due to the variability of filtration parameters. Testing was conducted using the single-pass test method, water at 3 gpm/10" cartridge (9.45 l/min). Contaminants included latex beads, coarse and fine test dust. Removal efficiencies were determined using dual laser source particle counters.



LOFMET filter cartridges are available with a variety of gasket and end cap configurations.

North America
44 Apple Street
Tinton Falls, NJ 07724
Toll Free: 800 656-3344
(North America only)
Tel: +1 732 212-4700

China
No. 3, Lane 280,
Linhong Road
Changning District, 200335
Shanghai, P.R. China
Tel: +86 21 5200-0099

Europe/Africa/Middle East
Auf der Heide 2
53947 Nettersheim, Germany
Tel: +49 2486 809-0

Singapore
100G Pasir Panjang Road #07-08
Singapore 118523
Tel: +65 6825-1668

Friedensstraße 41
68804 Altlußheim, Germany
Tel: +49 6205 2094-0
An den Nahewiesen 24
55450 Langenlonsheim, Germany
Tel: +49 6704 204-0

Brazil
Rua Clark, 2061 - Macuco
13279-400 - Valinhos, Brazil
Tel: +55 11 3616-8400

For more information, please email us at filtration@eaton.com or visit www.eaton.com/filtration

US
EF-LM
05-2018

© 2018 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

