FOR DIMENSION
TABLES SEE
AFC-3300-IB-DT001

$\phi\frac{3}{4}$
[ϕ19]
MOUNTING HOLES
4 PLACES

4
[102]

OUTLET/INLET

DRAIN — 3"

SEE
AFC-3300-IB-RE001
FOR RIGHT SIDE
VIEW
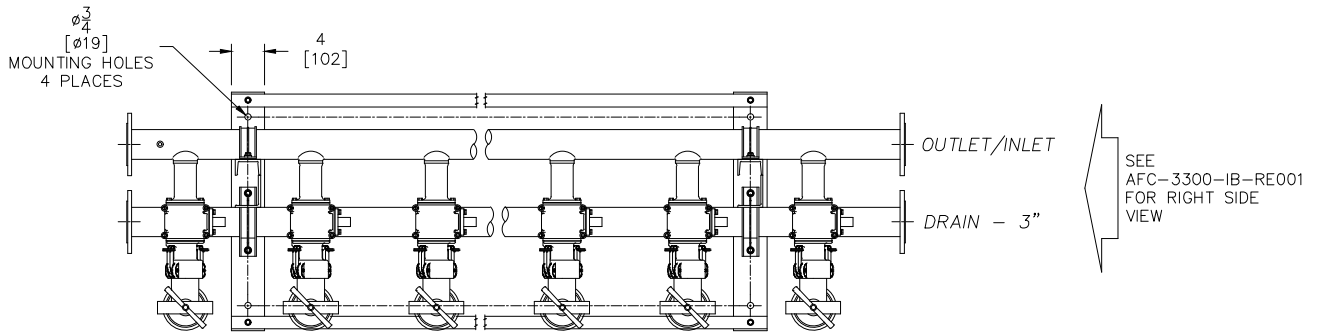
SEE
AFC-3300-IB-GA001
FOR FRONT VIEW

NOTES:
1. ALL FLANGED PROCESS CONNECTIONS ARE LAP JOINT TYPE WITH ZINC PLATED CARBON STEEL BACKUP RINGS.
2. PROCESS FLANGE CONNECTIONS ARE DRILLED TO ANSI, CLASS 150 OR DIN ND16.
3. HEADERS MAY BE PIPED AT EITHER END; BLIND FLANGES (PURCHASER SUPPLIED) REQUIRED FOR OPPOSITE END.
4. CONTROL PANEL IS EXCLUSIVE TO AUTOMATED UNITS.
5. 1/4" VALVES (ON INLET/OUTLET HEADERS) ARE EXCLUSIVE TO AUTOMATED UNITS. MANUAL UNITS ARE EQUIPPED WITH GAUGES (1/4" NPT) AT THESE POSITIONS.
6. HANDLE EXTENSIONS ARE PROVIDED AT EACH STATION ON MANUAL UNITS.
7. ALL METALLIC WETTED PARTS ARE 316 STAINLESS STEEL.
8. AUTOMATION AIR REQUIREMENTS: 5 SCFM [142 LITERS/MIN] MAXIMUM DEMAND AT 60 PSI [4.1 BAR] MIN, 120 PSI [8.2 BAR] MAX.
9. ALL DIMENSIONS ARE IN INCHES [MM].
10. FILTER ELEMENTS ARE DESIGNED TO WITHSTAND 150 PSI [10.3 BAR] DIFFERENTIAL PRESSURE.
11. OPERATING PRESSURE IS (SEE SHEET AFC3300IB-4). HYDROSTATIC TEST PRESSURE IS (SEE SHEET AFC3300IB-4).
12. EXTERIOR FINISH:
    TOP COAT: 1 MIL MINIMUM.
    COLOR: SILVER.