


	DIM 'A'	DIM 'B'
2218	26-1/2" [673]	38-3/4" [985]
2236	44-15/16" [1141]	57-3/16" [1453]

NORDEL (EPT)	VITON (VIT)			
1000 PSI [69 BAR]	1000 PSI [69 BAR]			
300°F [149°C]	350°F [176°C]			

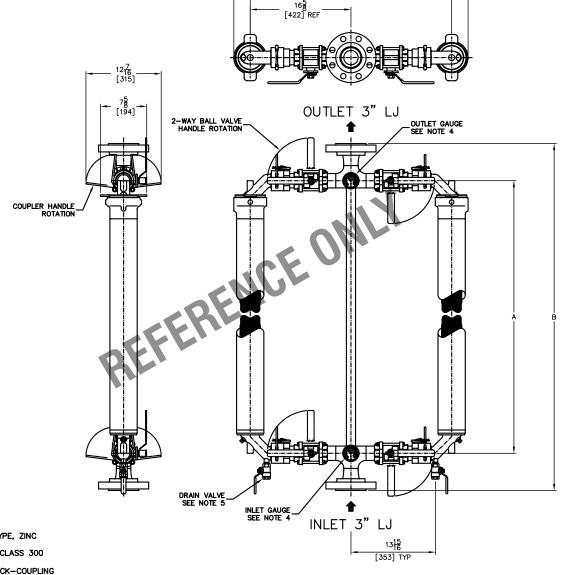

38<mark>5</mark> [981]

> 33<u>3</u> [843] REF

NOTES:

- 1. ALL FLANGED PROCESS CONNECTIONS ARE LAP JOINT TYPE, ZINC PLATED CARBON STEEL.
- 2. PROCESS FLANGE CONNECTIONS ARE DRILLED TO ANSI, CLASS 300 OR 600, OR CUSTOMER SPECIFIED DIN EQUIVALENT.
- FILTER SERVICE CONNECTIONS ARE 2", LEVER-LOCK QUICK-COUPLING TYPE.
- 4. INLET AND OUTLET GAUGES (AS SHOWN) ARE OPTIONAL. 1/4" NPT PIPE PLUGS ARE PROVIDED AS STANDARD.
- 5. 1/2" NPT STAINLESS STEEL DRAIN VALVES (AS SHOWN) ARE OPTIONAL.
- 6. ALL METALLIC WETTED PARTS ARE 316 STAINLESS STEÉL.
- 7. ALL DIMENSIONS ARE IN INCHES WITH METRIC EQUIVALENTS IN
- BRACKETS [].

 9. FILTER ELEMENTS ARE DESIGNED TO WITHSTAND 150 PSI
 [10.3 BAR] DIFFERENTIAL PRESSURE.
- OPERATING PRESSURE IS UP TO 1000 PSI [69 BAR].
 HYDROSTATIC TEST PRESSURE IS 1000 PSI [69 BAR].
- 11. EXTERIOR FINISH: TOP COAT: 1 MIL MINIMUM. COLOR: SILVER



EATON FILTRATION, LLC RONNINGEN-PETTER PRODUCTS 9151 SHAVER ROAD PORTAGE, MICHIGAN 49024-6798 USA THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF EATON CORPORATION. IT IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC. THIS DRAWING IS LOANED SUBJECT TO RETURN ON DEMAND, AND IS NOT TO BE USED DIRECTLY OR INDIRECTLY, IN ANY WAY DETRIMENTAL TO THE INTERESTS OF EATON FILTRATION, LLC.

REVISIONS

ENGINEERING APPROVAL . SALES/MKTG APPROVAL	DRAWN BY B. STUCK SCALE	DSS-2218/2236-HP-1000 STRATE-THRU DUO FILTER			
•	NONE ENGINEERING SPECIFICATION	DATE 01 /02 /07	SIZE	DWG FILENAME	REV
		01/02/03	A	DUO-2200-DST-GA003	A