## **Tefzel-Lined Basket Strainer**



# Model 72L

- Carbon steel with Tefzel® liner
- Corrosion resistant
- Sizes 1" to 6"
- Flanged

## Features

- Excellent corrosion resistance
- Abrasion resistant 1/8" Tefzel lining
- Tefzel-coated baskets
- Service temperatures to 149 °C
- Quick opening covers
- Large capacity baskets
- Flanged drain
- Low cost alternative to exotic alloy strainers

## Options

- MONEL<sup>®</sup> baskets
- HASTELLOY<sup>®</sup> C baskets
- Consult Eaton for available perf and mesh sizes

Tefzel® and Viton® are registered trademarks of E. I. du Pont de Nemours and company. MONEL® is a registered trademark of Special Metals Corporation group of Companies. HASTELLOY® is a registered trademark of Haynes International Inc. A continuous lining of advanced fluoropolymer resin makes the Eaton Model 72L simplex strainer an excellent low cost alternative to exotic alloy strainers in a wide variety of corrosive or abrasive lined piping applications. These applications include wastewater treatment, paper mills, hazardous materials, flue gas systems, ultra pure water handling, chemical and petrochemical processing. The basic design of the Model 72L is Eaton's time tested Model 72 simplex basket strainer.


The body and cover of the Model 72L are lined, not just coated with Tefzel. This protects all wetted surfaces of the strainer, making it impervious to attack by chemicals that can cause rapid deterioration of other types of plastics and all but the most costly metal alloys.

The Tefzel fluoropolymer lining is inert to strong mineral acids, inorganic bases, halogens and metal salt solutions. Even carboxylic acids, anhydrides, aromatic and aliphatic hydrocarbons, alcohols, aldehydes, ketones, ethers, esters, chlorocarbons and classic polymer solvents have no effect on the Tefzel lining. Service temperatures can range up to 149 °C in many applications. The lining also displays excellent mechanical strength when handling abrasive slurries.


Fitted with fluoropolymer coated perforated baskets or mesh baskets made of MONEL or HASTELLOY C, these strainers can be used in almost any lined piping or similar corrosive/abrasive strainer application.



## Model 72L Tefzel-Lined Basket Strainer

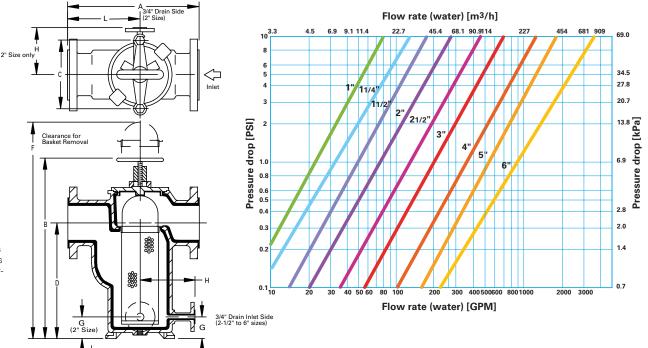

Dimensions and weights are for reference only. Contact Eaton for certified drawings.



Sel	ection	chart
<b>U</b> U	Couon	Gilait

Size	Material	End connections	Seals	Pressure rating
1" to 6"	Carbon steel with	Flanged 150#	Viton®	13.8 bar @ 38 °C
	Tefzel liner			

#### size (in) area (in<sup>2</sup>) area (in<sup>2</sup>) size (in) 1/32 0.86 195

Tefzel-coated basket

Pipe

Per

Basket & screen effective area -

Pipe

Screen

Free

area (in²)

Free/pipe

ratio

	20	1"	1/32	0.86	19.5	5.2	6.1	
2"	72	I	1/32	0.00	19.0	J.Z	0.1	
2-1/2"	135	2"	1/16	3.35	50.9	15.8	4.7	
3"	170	2-1/2"	1/16	4.78	80.2	24.9	5.2	
-	3 170		5/32	7.39	114.5	72.1	9.8	
4"	350	3"	3/32	7.00	114.0	72.1	5.0	
6"	880	4"	5/32	12.73	168.3	106.0	8.3	
0	000	6"	5/32	28.90	324.2	204.2	71	
For water with clean,		0	5/52	20.00	524.2	204.2	7.1	

\* For perforated basket

C<sub>v</sub> factors\*

Value

23

Size

1

### Dimensions (in/mm)

Pipe size	А	В	C	D	F	G	Н	J	К	L	Dry wt kg
1	7.88 / <mark>200</mark>	9.00 / 229	4.00 / 102	5.00 / 127	12 / <mark>305</mark>	2.75 / <mark>70</mark>	-	-	-	4.50 / 114	7
2	10.75 / <mark>273</mark>	13.75 / <mark>349</mark>	6.75 / 1 <mark>7</mark> 2	7.63 / <mark>194</mark>	20 / 508	1.88 / <mark>48</mark>	5.63 / <mark>143</mark>	5.50 / <mark>140</mark>	2.50 / <mark>64</mark>	5.88 / <mark>149</mark>	22
2-1/2	11.88 / <mark>302</mark>	15.75 / <mark>400</mark>	8.00 / <mark>203</mark>	8.88 / 226	23 / 584	2.19 / <mark>56</mark>	6.25 / <mark>159</mark>	6.50 / <mark>165</mark>	2.88 / <mark>73</mark>	6.50 / <mark>165</mark>	32
3	13.75 / <mark>349</mark>	18.75 / <mark>476</mark>	8.00 / <mark>203</mark>	12.00 / <mark>305</mark>	27 / <mark>686</mark>	2.31 / <mark>59</mark>	6.38 / <mark>162</mark>	7.00 / <mark>118</mark>	3.13 / <mark>80</mark>	7.38 / <mark>187</mark>	43
4	17.50 / <mark>445</mark>	20.00 / <mark>508</mark>	10.75 / <mark>273</mark>	10.69 / <mark>272</mark>	30 / <mark>76</mark> 2	2.38 / <mark>60</mark>	7.75 / <mark>197</mark>	10.00 / <mark>254</mark>	3.88 / <mark>99</mark>	9.75 / <mark>248</mark>	63
6	19.88 / <mark>505</mark>	28.25 / <mark>718</mark>	10.75 / <mark>273</mark>	18.31 / <mark>465</mark>	46 / 1168	2.19 / <mark>56</mark>	7.88 / <mark>200</mark>	10.00 / <mark>254</mark>	5.00 / 127	11.00 / <mark>279</mark>	113

orth America 44 Apple Street Tinton Falls, NJ 07724 Toll Free: 800 656-3344 (North America only) Tel: +1 732 212-4700

Europe/Africa/Middle East Auf der Heide 2 53947 Nettersheim, Germany Tel: +49 2486 809-0

Friedensstraße 41 68804 Altlußheim, Germany Tel: +49 6205 2094-0

An den Nahewiesen 24 55450 Langenlonsheim, Germany Tel: +49 6704 204-0

China No. 3, Lane 280, Linhong Road Changning District, 200335 Shanghai, P.R. China Tel: +86 21 5200-0099

Singapore 100G Pasir Panjang Road #07-08 Singapore 118523 Tel: +65 6825-1668

#### Brazil Rua Clark, 2061 - Macuco

13279-400 - Valinhos, Brazil Tel: +55 11 3616-8400

#### For more information, please email us at filtration@eaton.com or visit www.eaton.com/filtration

© 2018 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommenda-tions appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to be enable. However, it is used to be a responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete. since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

ΕN EF-SSEA-8 08-2018



