

# CHAMP<sup>®</sup> VOYAGER nR<sup>™</sup> STAINLESS STEEL FLOODLIGHT DOOR REPLACEMENT KIT

**COOPER** Crouse-Hinds

**IF 1533**

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE


The following instructions provide the procedure for replacement of the door on the SSFMV, 150, 250 & 400 watts high pressure sodium (HPS) and 175, 250 & 400 watt metal halide (MH) series floodlights.

## SSFMV DOOR REPLACEMENT

### **⚠ WARNING**

Electrical power must be OFF before and during installation or maintenance.

1. Use a punch and hammer to loosen the hinge-pin so it is sticking out on one end.
2. With pliers, pull the hinge-pin completely out, releasing the door.

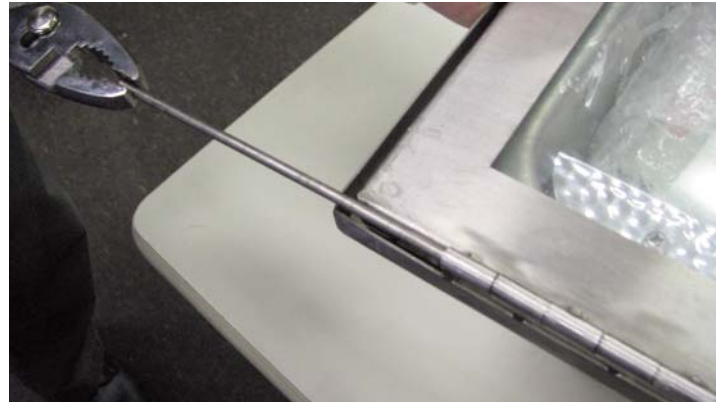

3. Replace with the new door, inserting the new hinge-pin all the way through the door hinges.



All statements, technical information and recommendations contained herein are based on information and tests we believe to be reliable. The accuracy or completeness thereof are not guaranteed. In accordance with Crouse-Hinds "Terms and Conditions of Sale," and since conditions of use are outside our control, the purchaser should determine the suitability of the product for his intended use and assumes all risk and liability whatsoever in connection therewith.

**COOPER** Crouse-Hinds

Cooper Industries Inc.  
Crouse-Hinds Division  
PO Box 4999, Syracuse, New York 13221 • U.S.A.  
Copyright© 2007, Cooper Industries, Inc.

IF1533  
Revision 1  
Revised 07/07