

# IQ and Power Xpert<sup>®</sup> Meter 2000 Comparison



Feature	IQ130	IQ140	IQ150	IQ250	IQ260	PXM2250	PXM2260	PXM2270	PXM2280	PXM2290
<b>Instrumentation</b>										
Current, per phase	•	•	•	•	•	•	•	•	•	•
Current demand	•	•	•	•	•	•	•	•	•	•
Calculated neutral current	•	•	•	•	•	•	•	•	•	•
Voltage, per phase (L-L, L-N)	•	•	•	•	•	•	•	•	•	•
Min/Max Readings I, V	•	•	•	•	•	•	•	•	•	•
Min/Max Readings I, V, PF, F, W, VAR, VA		•	•	•	•	•	•	•	•	•
Frequency		•	•	•	•	•	•	•	•	•
<b>Power</b>										
Real, reactive and apparent power, (W, VAR, VA)		•	•	•	•	•	•	•	•	•
Power factor, total		•	•	•	•	•	•	•	•	•
Real, reactive and apparent power demand		•	•	•	•	•	•	•	•	•
<b>Demand Methods</b>										
Block interval (sliding, fixed)		•	•	•	•	•	•	•	•	•
<b>Energy</b>										
Real, reactive and apparent energy, total (Wh, VAR, Vah)			•	•	•	•	•	•	•	•
<b>Data Logging</b>										
Storage				Opt 128KB	Opt 128KB	256MB	512MB	768MB	768MB	768MB
<b>THD</b>										
% THD Amps and Volts (To 40th)					•		•	•	•	•
<b>Waveform</b>										
Waveform recording, samples/cycle									Up to 64	Up to 512
Ind. Bar Harmonics view								•	•	•
Single cycle waveform view								•	•	•
<b>Communications</b>										
RS-485, Modbus RTU/ASCII, KYZ Output	Opt	Opt	Opt	•	•	•	•	•	•	•
DNP 3.0				•	•	•	•	•	•	•
<b>Digital I/O</b>										
Digital Input				Opt	Opt	Opt	Opt	Opt	Opt	Opt
Digital Output				Opt	Opt	Opt	Opt	Opt	Opt	Opt
<b>Analog I/O</b>										
Analog Output				Opt	Opt	Opt	Opt	Opt	Opt	Opt
<b>Ethernet</b>										
HTTP (Web pages)				*	*	•	•	•	•	•
SMTP (Email)				*	*	•	•	•	•	•
NTP (Time Sync)				*	*	•	•	•	•	•
Modbus TCP/IP (RJ-45)	Opt	Opt	Opt	*	*	•	•	•	•	•
BACnet/IP						•	•	•	•	•
SNMP				*	*	•	•	•	•	•
Phasor Diagram (Web View - Wye Connected)				*	*	•	•	•	•	•
<b>Revenue Accuracy</b>										
ANSI C12.20 (0.5 or 0.2%)	0.5%	0.5%	0.5%	0.2%	0.2%	0.2%	0.2%	0.2%	0.2%	0.2%


\*Note: Option can be added later by upgrading to a Power Xpert Meter 2000 series using a Power Xpert Meter 2000 Gateway Card Kit (PXM2000-GCK).




Powering Business Worldwide

# Ordering Information


**Table 1. IQ 100 Meter Catalog Numbering System**

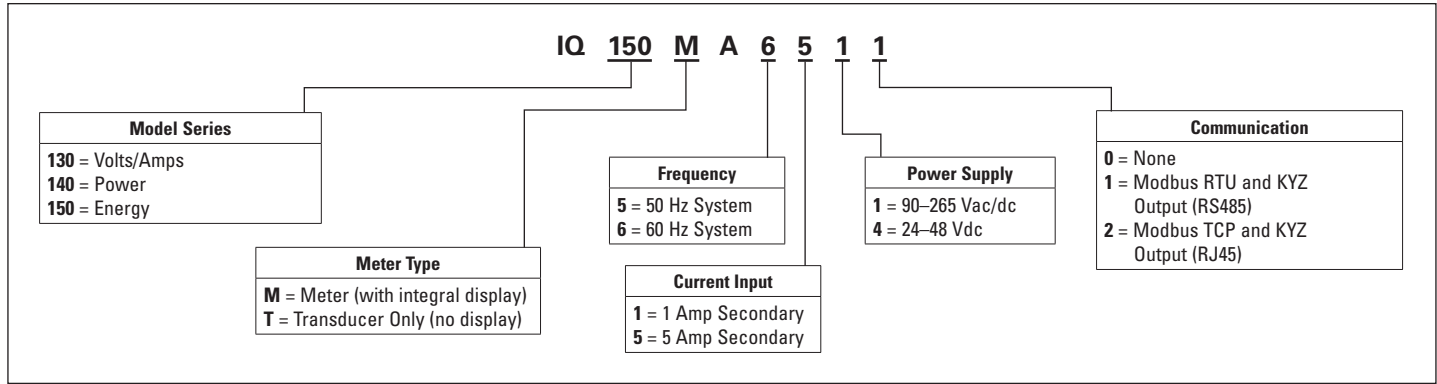

**Table 2. IQ 250/260 Meter Catalog Numbering System**

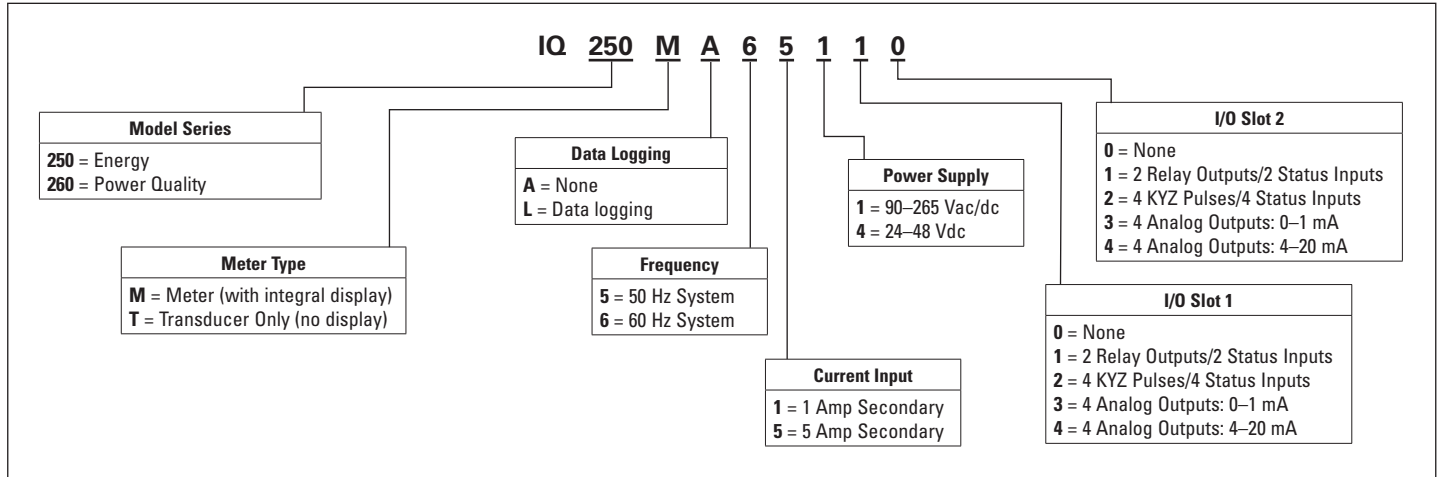

**Table 3. Power Xpert Meter 2000 Catalog Numbering System**

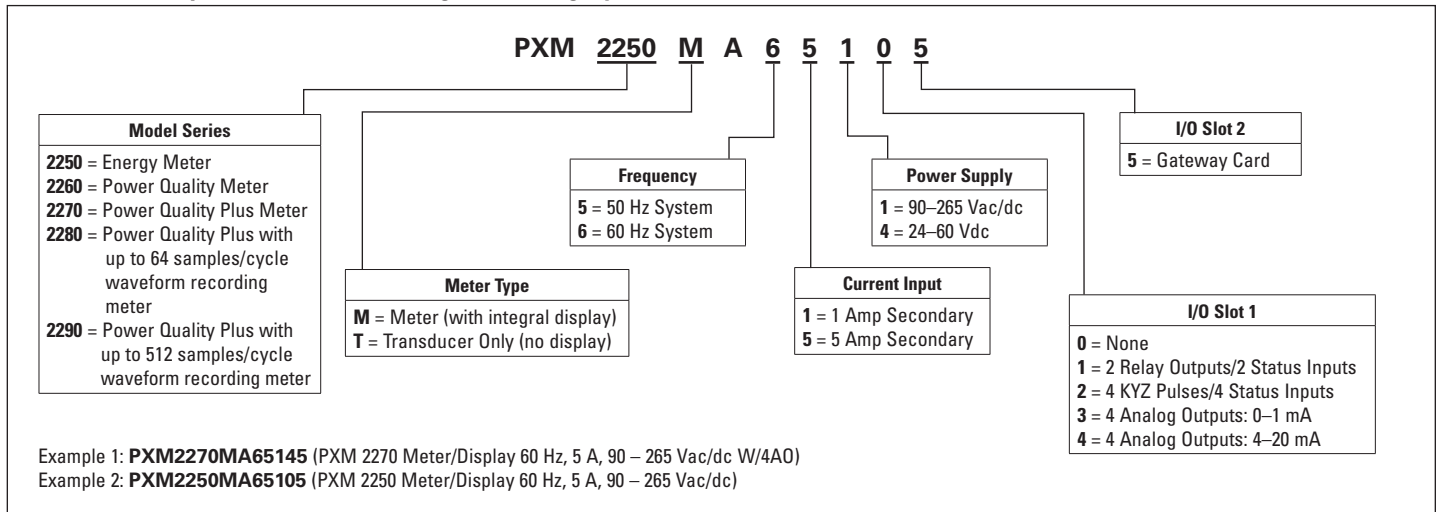

**Table 4. IQ Meter Accessories**

Description	Catalog Number
Panel Mounting Adapter Kit for retrofitting an IQ 100 meter, an IQ 250/260 meter or a Power Xpert Meter 2000 to an IQ Analyzer/IQ DP-4000/IQ Data Cutout	<b>IQ250-PMAK</b>
PXM 2000 Gateway Card Kit to Upgrade an IQ 250/260 to a PXM 2000	<b>PXM2000-GCK</b>

**Table 5. Power Xpert Meter 2000 & IQ 250/260 I/O Cards**

Description	Catalog Number
PXM 2000 & IQ 250/260 I/O Card-2 Relay Outputs/2 Status Inputs	<b>IQ250/260-I01</b>
PXM 2000 & IQ 250/260 I/O Card-4 KYZ Pulses/4 Status Inputs	<b>IQ250/260-I02</b>
PXM 2000 & IQ 250/260 I/O Card-4 Analog Outputs - 0–1 mA	<b>IQ250/260-I03</b>
PXM 2000 & IQ 250/260 I/O Card-4 Analog Outputs - 4–20 mA	<b>IQ250/260-I04</b>

**Eaton Corporation**  
 Electrical Sector  
 1111 Superior Ave.  
 Cleveland, OH 44114  
 United States  
 877-ETN-CARE (877-386-2273)  
 Eaton.com/meters

© 2012 Eaton Corporation  
 All Rights Reserved  
 Printed in USA  
 SA02601007E / TN  
 April 2012



Eaton and Power Xpert are registered trademarks of Eaton Corporation.

All other trademarks are property of their respective owners.