

**TIME-CURRENT CHARACTERISTIC CURVES**

MINIMUM MELT 15.5V MINI-MID RANGE, AMULTI-COIL ELSP  
BACKUP TYPE OIL-IMMERSIBLE CURRENT LIMITING FUSE

Tests made at LOW Volts or at HIGH pf at 25°C with no initial load

Standards used as basis for data: ANSI C37.47-1991 (R1992)


MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE PLUS

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

**COOPER Power Systems**  
COMPONENTS AND PROTECTIVE EQUIPMENT

DRAWN BY ALJ (CHKD) GTB  
DATE 02/14/03 DATE 02/19/03  
REPLACES [REV 0] REQ NO. 21537  
DWG NO. 42 39732 B 00

Reference Data  
R240-91-72  
Page 1 of 2

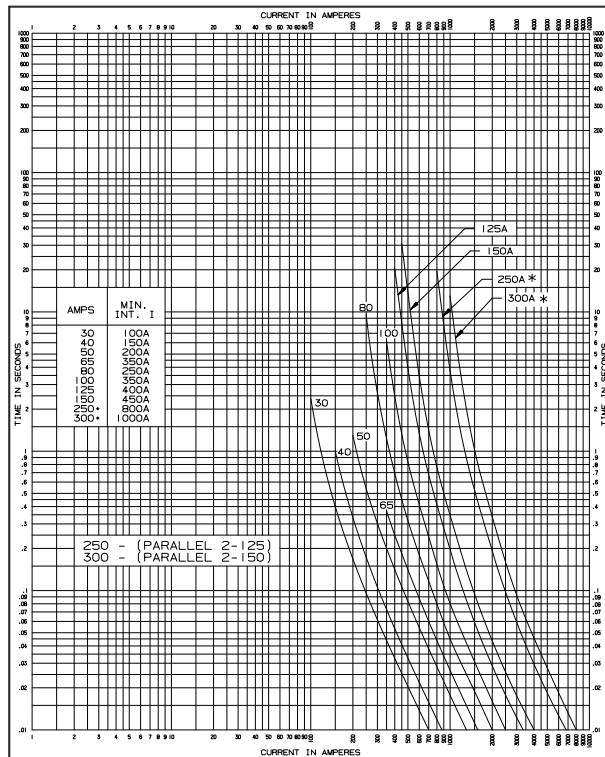

**TIME-CURRENT CHARACTERISTIC CURVES**

MAXIMUM CLEAR 15.5V MINI-MID RANGE, AMULTI-COIL ELSP  
BACKUP TYPE OIL-IMMERSIBLE CURRENT LIMITING FUSE

Tests made at RATED Volts or at LOW pf at 25°C with no initial load

Standards used as basis for data: ANSI C37.47-1991 (R1992)

MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE MINUS

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

**COOPER Power Systems**  
COMPONENTS AND PROTECTIVE EQUIPMENT

DRAWN BY ALJ (CHKD) GTB  
DATE 02/14/03 DATE 02/19/03  
REPLACES [REV 0] REQ NO. 21537  
DWG NO. 42 39732 B 00

Reference Data  
R240-91-72  
Page 2 of 2