

**COOPER** Power Systems  
COMPONENTS AND PROTECTIVE EQUIPMENT

**TIME-CURRENT CHARACTERISTIC CURVES**

MINIMUM MELT  
15.5KV NX (C-RATED)

Tests made at LOW Volts or at HIGH pf at 25°C with no initial load


Standards used as basis for data: ANSI C37.47-1991 (R1992)

MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE PLUS

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

DRAWN BY JFR [CKW]  
DATE 11-27-00  
REPLACES 06/71 [REV 00] REQ NO. 19892  
DWG NO. 42 39647 B 00

Reference Data  
R240-91-35  
Page 1 of 2

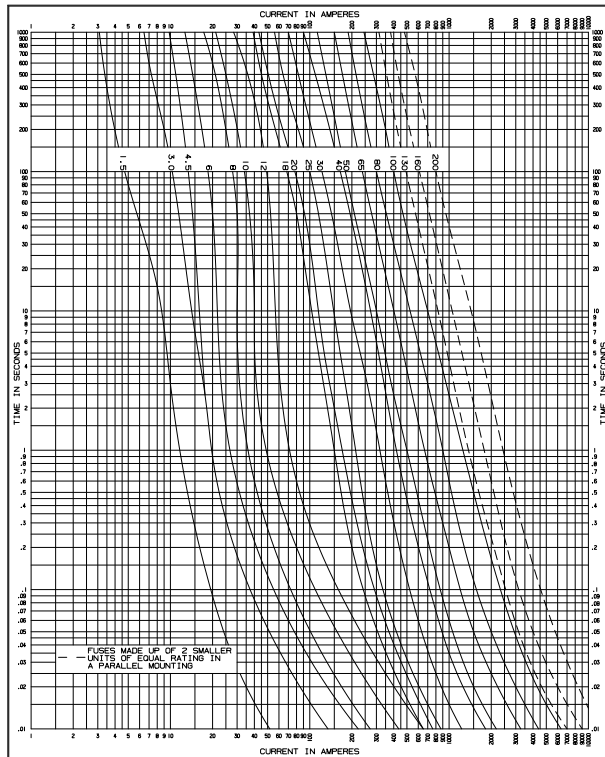

**COOPER** Power Systems  
COMPONENTS AND PROTECTIVE EQUIPMENT

**TIME-CURRENT CHARACTERISTIC CURVES**

MAXIMUM CLEAR  
15.5KV NX (C-RATED)

Tests made at RATED Volts or at LOW pf at 25°C with no initial load

Standards used as basis for data: ANSI C37.47-1991 (R1992)

MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE MINUS

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

DRAWN BY JFR [CKW]  
DATE 11-27-00  
REPLACES 06/71 [REV 00] REQ NO. 19892  
DWG NO. 42 39647 B 00

Reference Data  
R240-91-35  
Page 2 of 2