

**COOPER Power Systems**  
COMPONENTS AND PROTECTIVE EQUIPMENT

**TIME-CURRENT CHARACTERISTIC CURVES**  
MINIMUM MELT 23.0V MINI-MID RANGE, AMULTI-COIL ELSP BACKUP TYPE OIL IMMERSIBLE CURRENT LIMITING FUSE


Tests made at LOW Volts ac at HIGH pf at 25°C with no initial load  
Standards used as basis for data: ANSI C37.47-1991 (R1992)

MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE PLUS

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

Reference Data  
R240-91-73  
Page 1 of 2

DRAWN BY ALJ [CWD] DATE 02/14/03  
 REPLACES [REV 0] REG NO. 21537  
 DWG NO. 42 39734 B 00

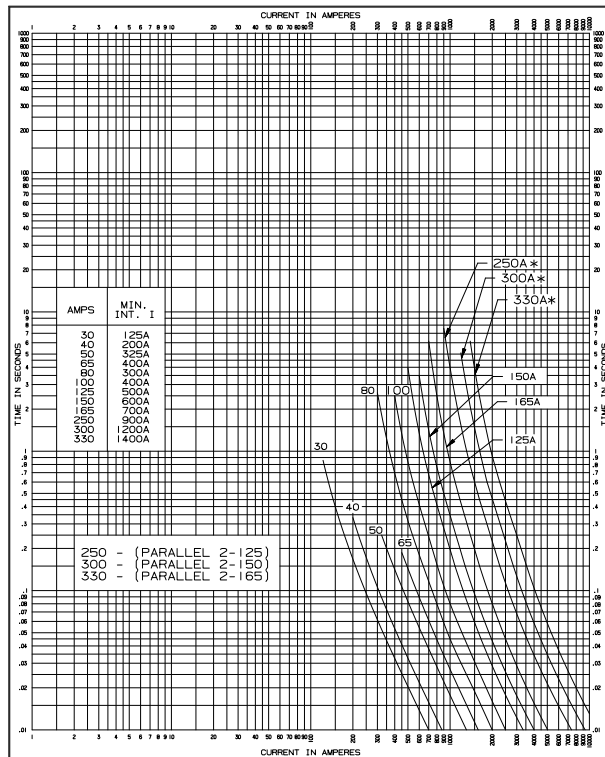

**COOPER Power Systems**  
COMPONENTS AND PROTECTIVE EQUIPMENT

**TIME-CURRENT CHARACTERISTIC CURVES**  
MAXIMUM CLEAR 23.0V MINI-MID RANGE, AMULTI-COIL ELSP BACKUP TYPE OIL IMMERSIBLE CURRENT LIMITING FUSE

Tests made at RATED Volts ac at LOW pf at 25°C with no initial load  
Standards used as basis for data: ANSI C37.47-1991 (R1992)

MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE MINUS

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

Reference Data  
R240-91-73  
Page 2 of 2

DRAWN BY ALJ [CWD] DATE 02/14/03  
 REPLACES [REV 0] REG NO. 21537  
 DWG NO. 42 39734 B 00