

COOPER Power Systems
COMPONENTS AND PROTECTIVE EQUIPMENT


TIME-CURRENT CHARACTERISTIC CURVES

MINIMUM MELT
5.5KV X-LIMITER "E" RATED 2.0 DIA (BUSSMANN)


DRAWN BY	DG	CHK'D	NRH
DATE	11-8-06	DATE	11-16-06
REPLACES	/	REV	00
		REQ NO.	23753
DWG NO.	CT TCC207	B	00

Tests made at LOW Volts ac at HIGH pf at 25°C with no initial load
Standards used as basis for data: ANSI C37.46-1981 (RI992)
MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE PLUS
THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

CURRENT IN AMPERES

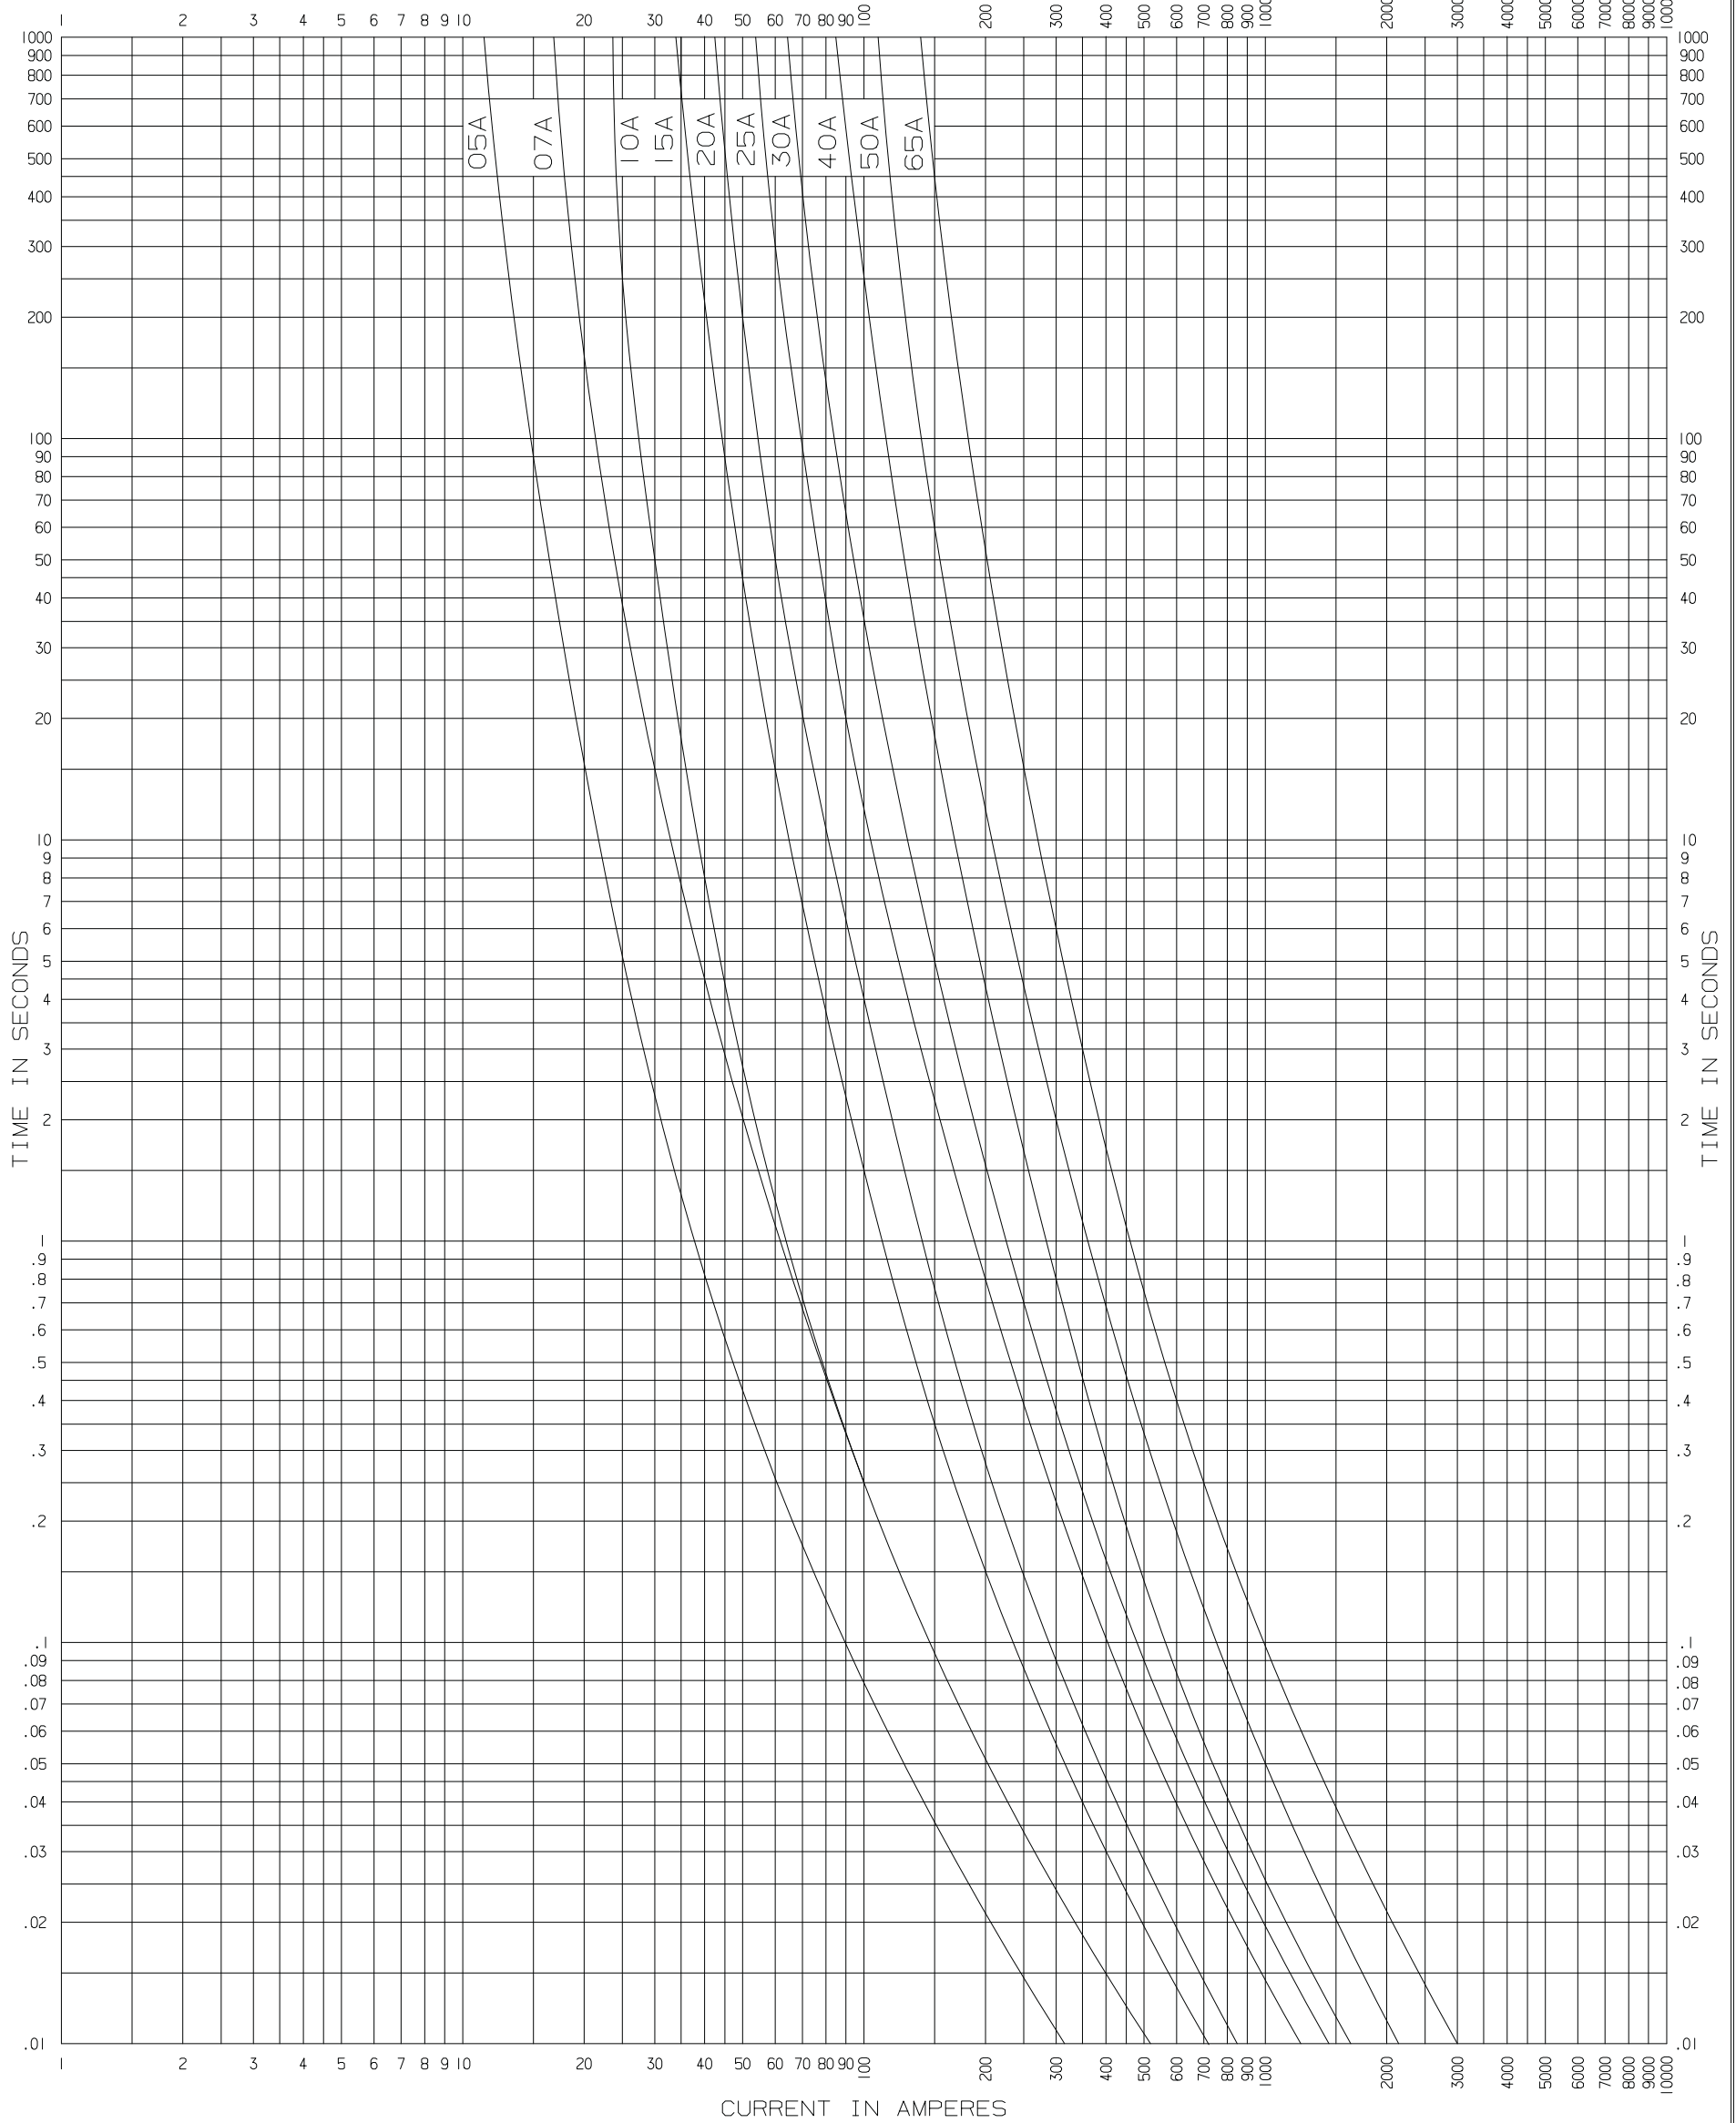

CURRENT IN AMPERES

 <p>COMPONENTS AND PROTECTIVE EQUIPMENT</p>	<p>TIME-CURRENT CHARACTERISTIC CURVES</p> <p>MAXIMUM CLEAR</p> <p>5.5KV X-LIMITER "E" RATED 2.0 DIA (BUSSMANN)</p>	
	DRAWN BY DG CHK'D NRH DATE 11-8-06 DATE 11-16-06 REPLACES / REV 00 REQ NO. 23753 DWG NO. CT TCC207 B 00	Tests made at RATED Volts ac at LOW pf at 25°C with no initial load Standards used as basis for data: ANSI C37.46-1981 (R1992) MAXIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE MINUS THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.