

**COOPER** Power Systems  
COMPONENTS AND PROTECTIVE EQUIPMENT

TIME-CURRENT CHARACTERISTIC CURVES

MINIMUM MELT  
8,3KV NX (C-RATED)

Tests made at LOW  $V_{LL}$  or at HIGH  $p_f$  at 25°C with no initial load


Standards used as basis for data: ANSI C37.47-1991 (R1992)

MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE PLUS

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

DRAWN BY JFR [CWD] DATE 11-17-00  
REPLACES 06/71 [REV 00] REG NO. 19892  
DWG NO. 42 39646 B 00

Reference Data  
R240-91-52  
Page 1 of 2

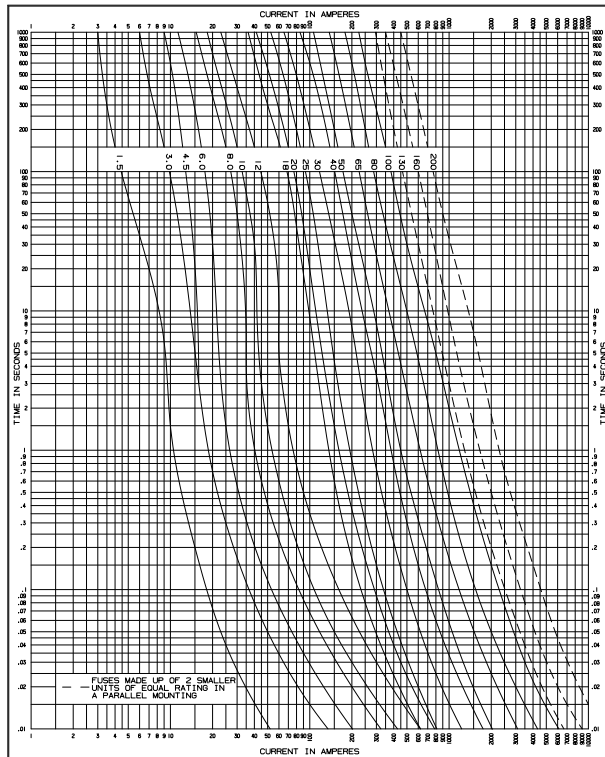

**COOPER** Power Systems  
COMPONENTS AND PROTECTIVE EQUIPMENT

TIME-CURRENT CHARACTERISTIC CURVES

MAXIMUM CLEAR  
8,3KV NX (C-RATED)

Tests made at RATED  $V_{LL}$  or at LOW  $p_f$  at 25°C with no initial load

Standards used as basis for data: ANSI C37.47-1991 (R1992)

MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE MINUS

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

DRAWN BY JFR [CWD] DATE 11-17-00  
REPLACES 06/71 [REV 00] REG NO. 19892  
DWG NO. 42 39646 B 00

Reference Data  
R240-91-52  
Page 2 of 2