


TIME-CURRENT CHARACTERISTIC CURVES

MINIMUM MELT 8.3kV MID-RANGE ELSF  
BACKUP OIL IMMERSIBLE CURRENT LIMITING FUSE

DRAWN BY: EKS	CHKD: [ ]	Tests made at LOW Volts ac at HIGH pf at 25°C with no initial load
DATE: 07-18-97	DATE: [ ]	Standards used as basis for data: ANSI C37.47-1991 (R1992)
REPLACES: 1/93/REV 03	REG NO. 17661	MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE PLUS
DWG NO. 42 39043 B 00		THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

Reference Data  
R240-91-82  
Page 1 of 2

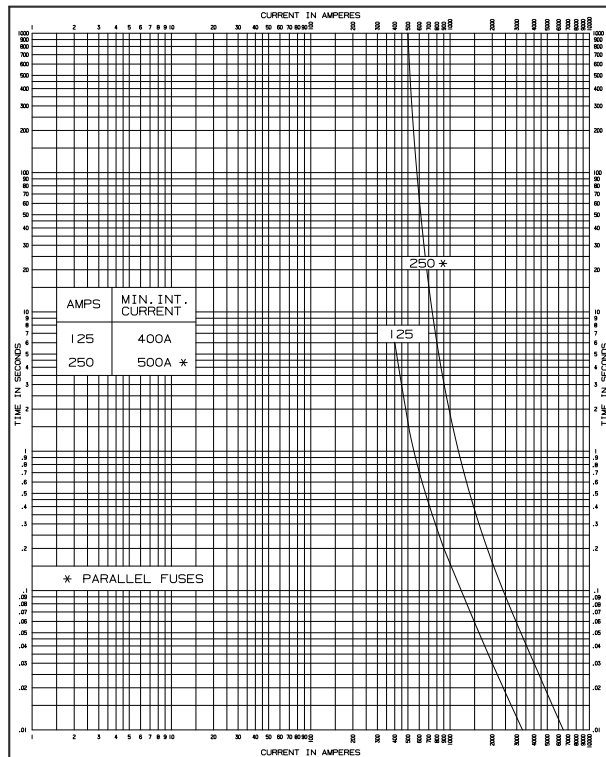

TIME-CURRENT CHARACTERISTIC CURVES

MAXIMUM CLEAR 8.3kV MID-RANGE ELSF  
BACKUP OIL IMMERSIBLE CURRENT LIMITING FUSE

DRAWN BY: EKS	CHKD: [ ]	Tests made at RATED Volts ac at LOW pf at 25°C with no initial load
DATE: 07-18-97	DATE: [ ]	Standards used as basis for data: ANSI C37.47-1991 (R1992)
REPLACES: 1/93/REV 03	REG NO. 17661	MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE MINUS
DWG NO. 42 39043 B 00		THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

Reference Data  
R240-91-82  
Page 2 of 2