

TIME-CURRENT CHARACTERISTIC CURVES

MINIMUM MELT
FOR TYPE C-TIN

Tests made at RATED Volts ac at LOW pf at 25°C with no initial load

Standards used as basis for data: ANSI C37.47-1991 (R1992)

MAXIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE MINUS

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

Reference Data
R240-91-8
Page 1 of 2




COMPONENTS AND PROTECTIVE EQUIPMENT

DRAWN BY JFR [CWD]

DATE 9-22-00 DATE

REPLACES 02/70 [REV 00] REG NO. 19892

DWG NO. 42 3964 | B | 00

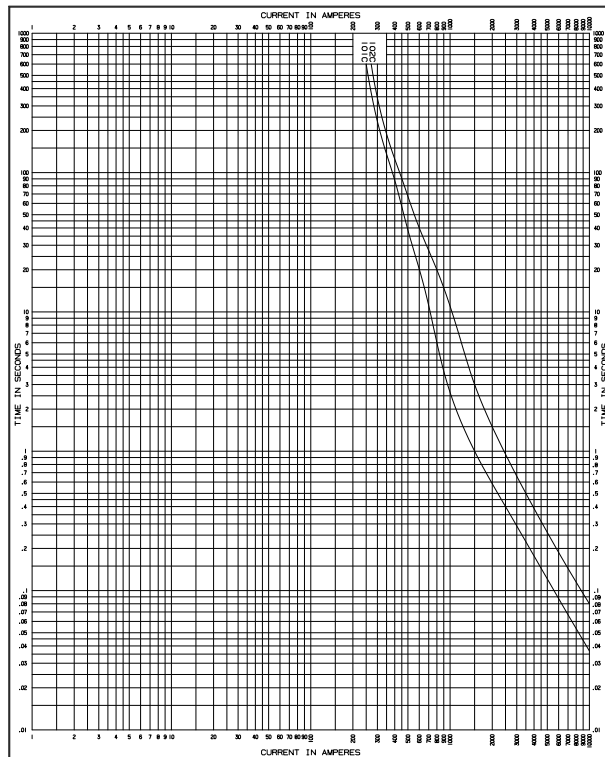

TIME-CURRENT CHARACTERISTIC CURVES

MAXIMUM CLEAR
FOR TYPE C-TIN

Tests made at RATED Volts ac at LOW pf at 25°C with no initial load

Standards used as basis for data: ANSI C37.47-1991 (R1992)

MAXIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE MINUS

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

Reference Data
R240-91-8
Page 2 of 2



COMPONENTS AND PROTECTIVE EQUIPMENT

DRAWN BY JFR [CWD]

DATE 9-22-00 DATE

REPLACES 02/70 [REV 00] REG NO. 19892

DWG NO. 42 3964 | B | 00