
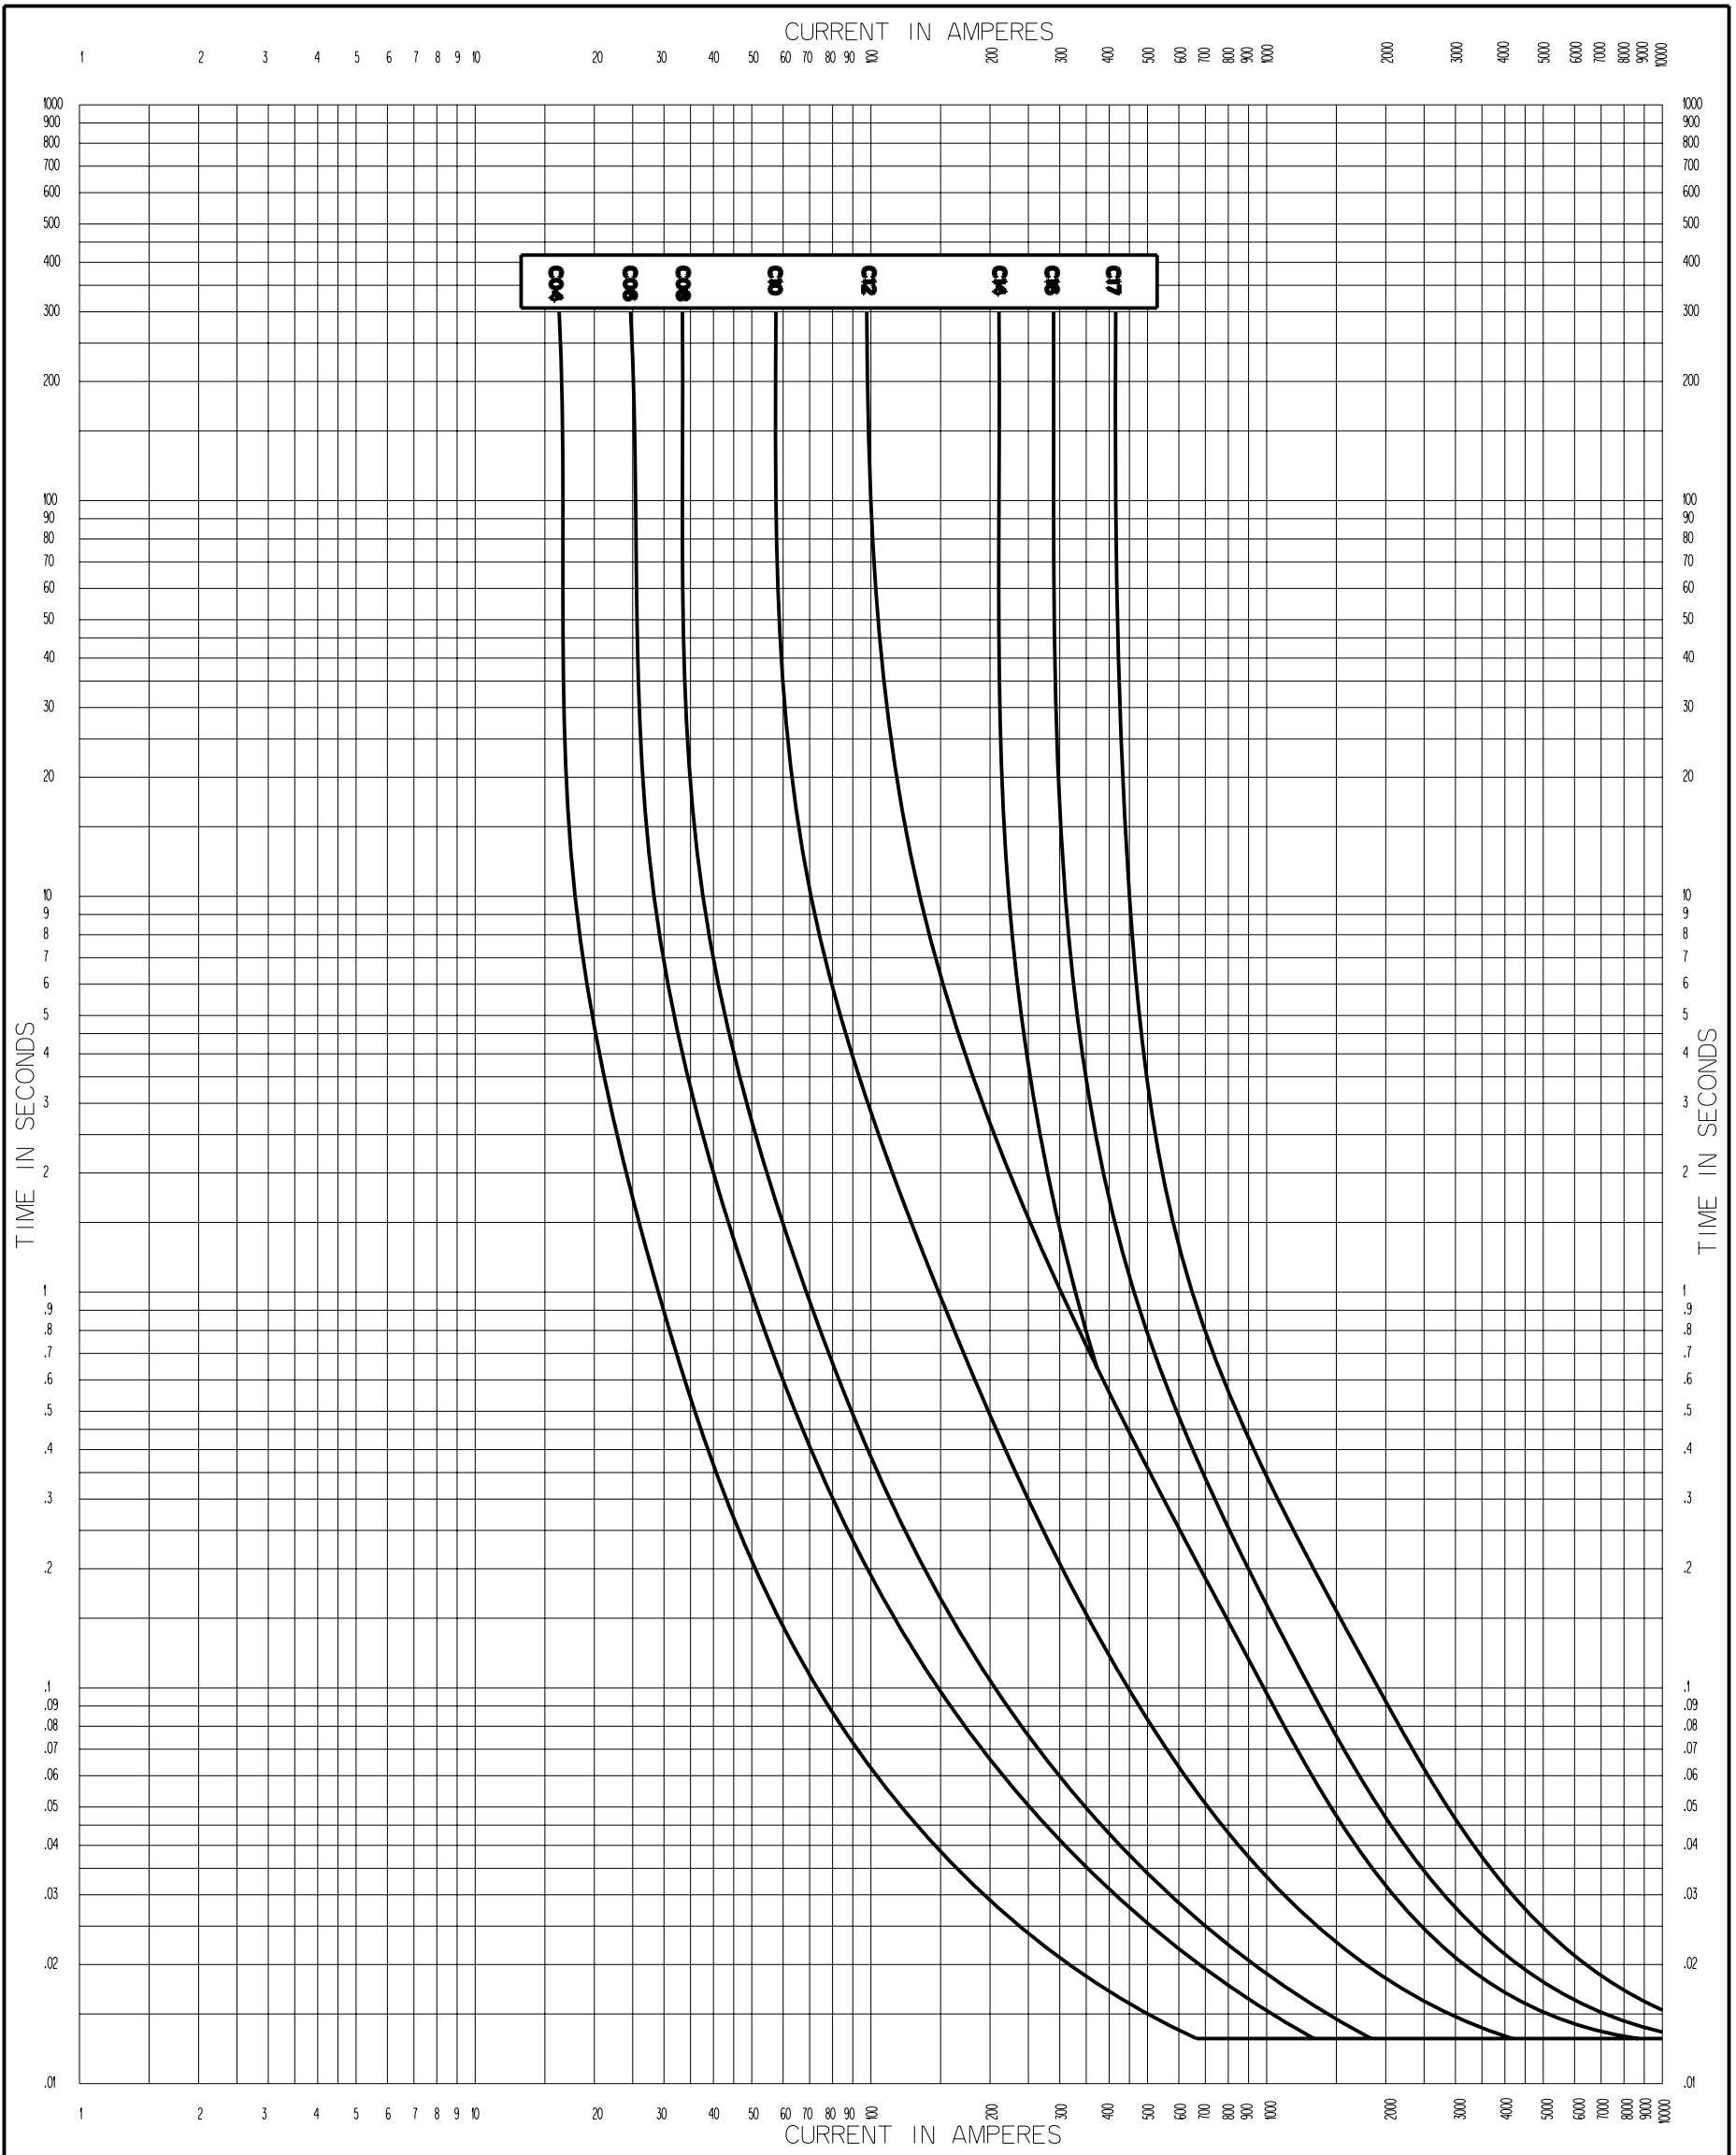


**MINIMUM MELT TIME CURRENT CHARACTERISTIC CURVES
BAY-O-NET CURRENT SENSING 353C FUSE LINKS IN TRANSFORMER OIL**

TESTS MADE AT LOW VOLTS AC AT HIGH PF AT 25°C WITH NO INITIAL LOAD

MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE PLUS


 <p>COOPER Power Systems LINE INSTALLATION AND PROTECTIVE EQUIPMENT</p>	DRAWN BY TAH	DWG DATE 05/03/11
	REQ 26514	REV DATE Supersedes 7/97
	APPROVAL NRH 06/15/2011	
COOPER POWER SYSTEMS CONFIDENTIAL	DOC NO. R240-91-50	REV 00
CAT NO. 4000353CXX	SHEET 1 OF 2	



**MAXIMUM CLEAR TIME CURRENT CHARACTERISTIC CURVES
BAY-O-NET CURRENT SENSING 353C FUSE LINKS IN TRANSFORMER OIL**

TESTS MADE AT RATED VOLTS AC AT LOW PF AT 25°C WITH NO INITIAL LOAD

MAXIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE MINUS

 <p>COOPER Power Systems LINE INSTALLATION AND PROTECTIVE EQUIPMENT</p>	DRAWN BY	TAH	DWG DATE	05/03/11
	REQ	26514	REV DATE	Supersedes 7/97
	APPROVAL	NRH 06/15/2011		
COOPER POWER SYSTEMS CONFIDENTIAL	DOC NO.	R240-91-50		REV 00

CAT NO.

4000353CXX