

TIME-CURRENT CHARACTERISTIC CURVES

MINIMUM MELT
FOR TYPE "D" FUSE LINK

Tests made at LOW Volts ac at HIGH pf at 25°C with no initial load

Standards used as basis for data: ANSI C37.47-1991 (R1992)


MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE PLUS

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

Reference Data
R240-91-16
Page 1 of 2

COOPER Power Systems
COMPONENTS AND PROTECTIVE EQUIPMENT

DRAWN BY **DS** [CWD] DATE **3-3-00**
REPLACES **1/95** REV **03** REG NO. **19586**
DWG NO. **42 38888 B 00**

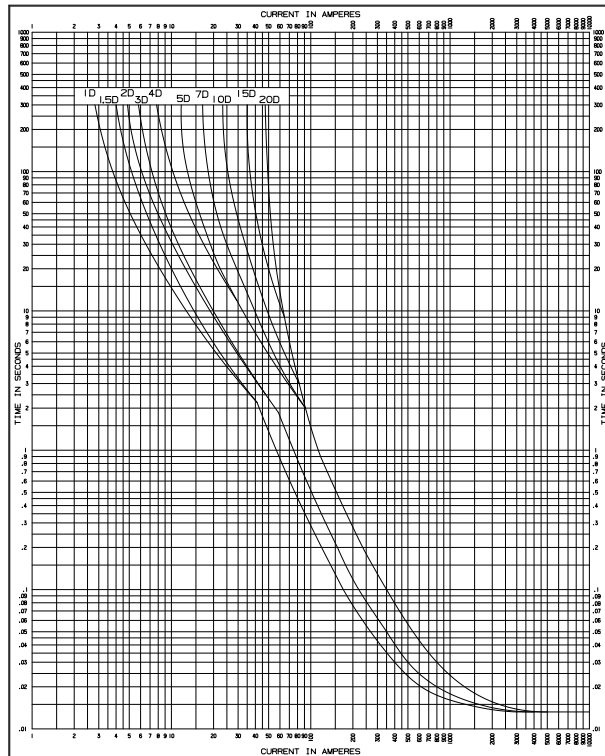

TIME-CURRENT CHARACTERISTIC CURVES

MAXIMUM CLEAR
FOR TYPE "D" FUSE LINK

Tests made at HIGH Volts ac at LOW pf at 25°C with no initial load

Standards used as basis for data: ANSI C37.47-1991 (R1992)

MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE MINUS

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

Reference Data
R240-91-16
Page 2 of 2

COOPER Power Systems
COMPONENTS AND PROTECTIVE EQUIPMENT

DRAWN BY **DS** [CWD] DATE **3-3-00**
REPLACES **1/95** REV **03** REG NO. **19586**
DWG NO. **42 38888 B 00**