


TIME-CURRENT CHARACTERISTIC CURVES

MINIMUM MELT TIME CURRENT CHARACTERISTIC CURVES
HIGH SURGE TYPE H FUSE LINK

COOPER Power Systems
COMPONENTS AND PROTECTIVE EQUIPMENT

DRAWN BY RJC CHK'D
DATE 4-16-96 DATE
REPLACES 1191 REV 01 REG NO. 16566
DWG NO. 42 39033 B 00

Tests made at LOW Volts ac at HIGH pf at 25°C with no initial load
Standards used as basis for data: ANSI C37.47-1991 (R1992)
MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE PLUS
THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.

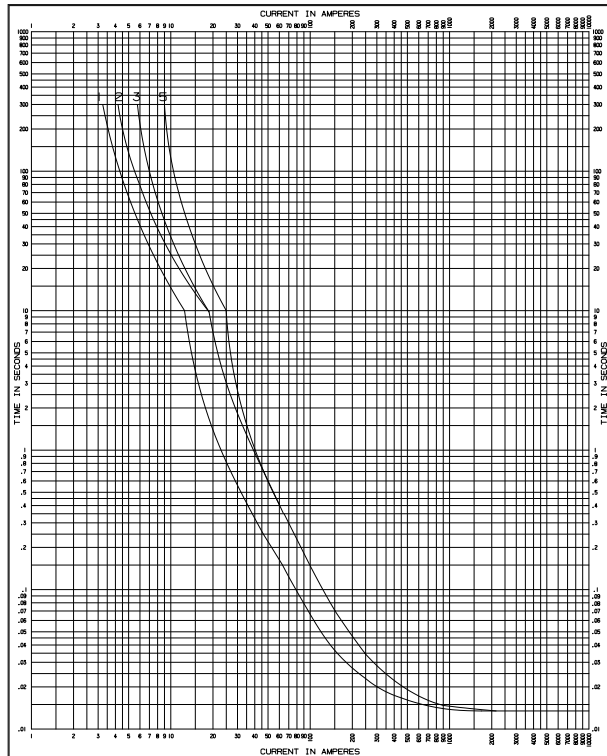

TIME-CURRENT CHARACTERISTIC CURVES

MAXIMUM CLEAR TIME CURRENT CHARACTERISTIC CURVES
HIGH SURGE TYPE H FUSE LINK

COOPER Power Systems
COMPONENTS AND PROTECTIVE EQUIPMENT

DRAWN BY RJC CHK'D
DATE 4-16-96 DATE
REPLACES 1191 REV 01 REG NO. 16566
DWG NO. 42 39033 B 00

Tests made at RATED Volts ac at LOW pf at 25°C with no initial load
Standards used as basis for data: ANSI C37.47-1991 (R1992)
MAXIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE MINUS
THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.