

COOPER POWER SYSTEMS DIVISION
COMPONENTS & PROTECTIVE EQUIPMENT

TIME-CURRENT CHARACTERISTIC CURVES

MINIMUM MELT

8.3, 15.5, 23.0 KV X-LIMITER FULL RANGE PARALLEL MOUNTED FUSE

DRAWN BY ALJ CHK'D *[Signature]*

Tests made at **LOW** Volts ac at **HIGH** pf at 25°C with no initial load

DATE 3/24/97 DATE 3/27/97

Standards used as basis for data: ANSI C37.47-1981 (R1992)


REPLACES 08/93 REV 01 REQ NO.

MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE PLUS

DWG NO. TCC305 M 00

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM. ANY MANUAL REVISION WILL VOID IT

Reference Data
R240-91-112
Page 1

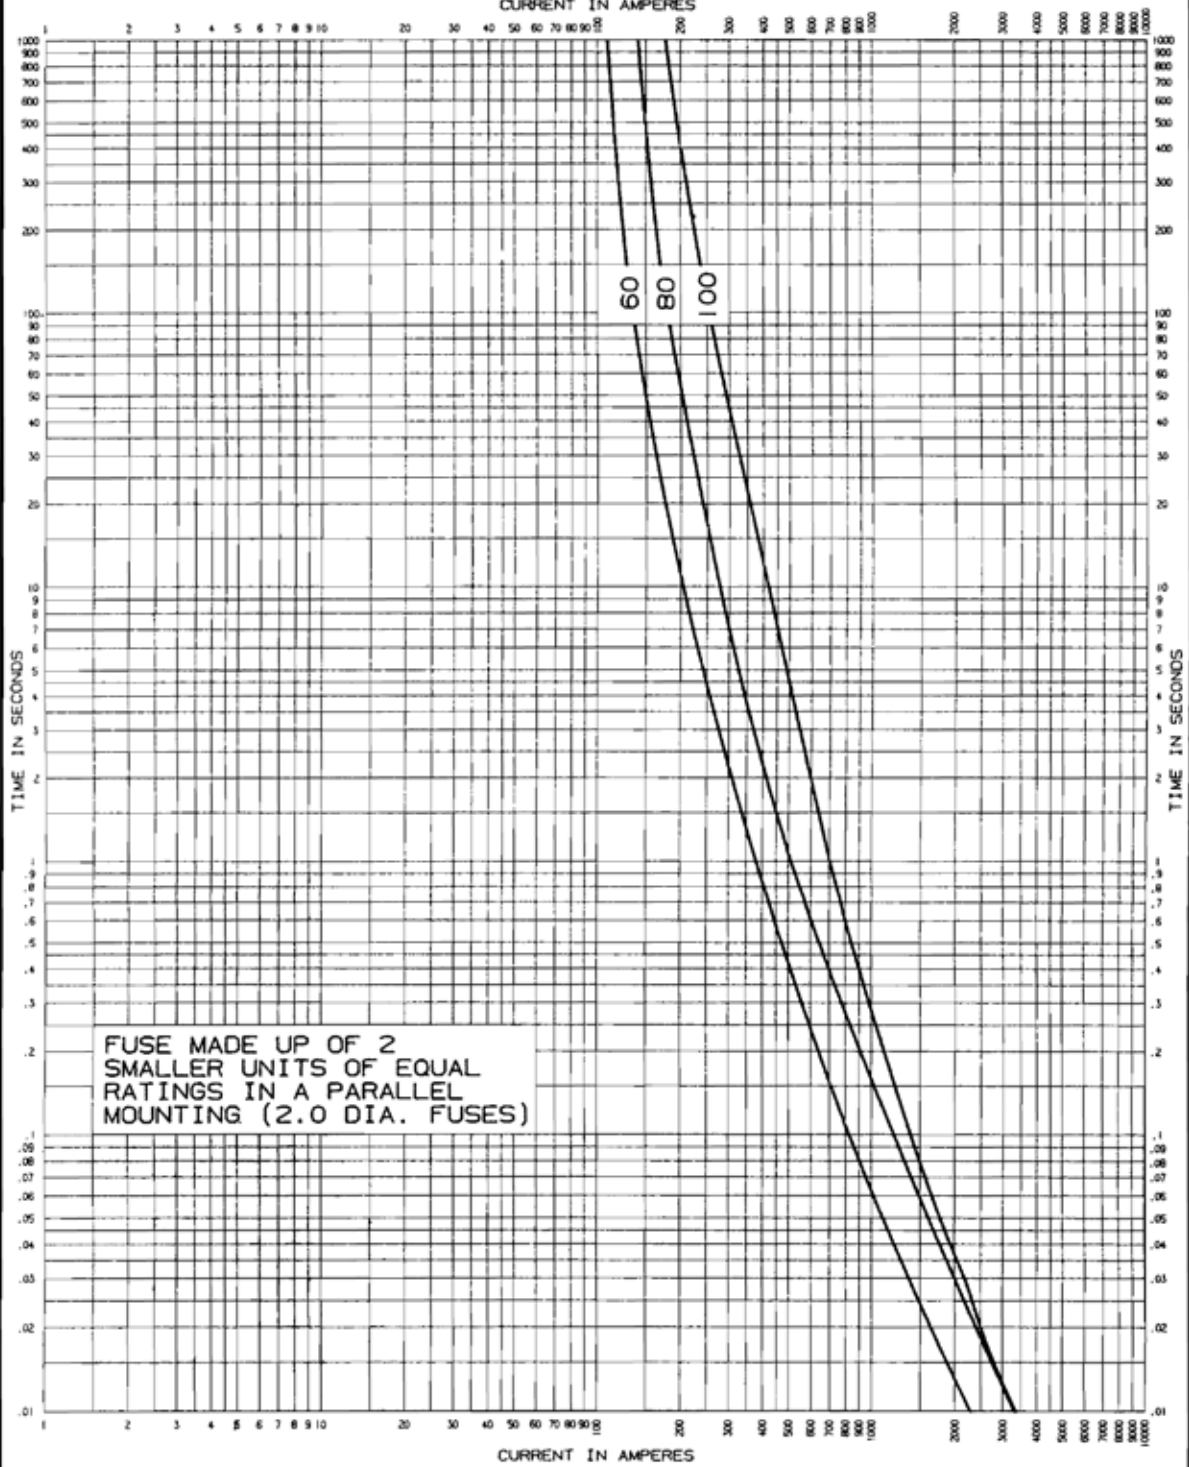

COOPER
COOPER POWER SYSTEMS DIVISION
COMPONENTS & PROTECTIVE EQUIPMENT

DRAWN BY ALJ CHK'D *[Signature]*
DATE 3/24/97 DATE 3/27/97
REPLACES 03/93 REV 01 REG NO.
DWG NO. TCC305 C 00

TIME-CURRENT CHARACTERISTIC CURVES
MAXIMUM CLEAR
8.3, 15.5, 23.0 KV X-LIMITER FULL RANGE PARALLEL MOUNTED FUSE

Tests made at RATED Volts ac at LOW pf at 25°C with no initial load
Standards used as basis for data: ANSI C37.47-1981 (R1992)
MAXIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE MINUS

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.