


# Coordination chart for Kearney type KS with type X fuse links

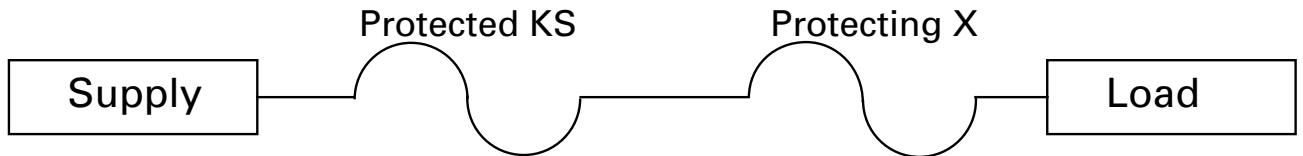

Protecting fuse type X	Protected fuse ampere rating type KS														
	5	7	10	15	20	25	30	40	50	65	80	100	125	150	200
1/3 - 3/4	370	680	1100	1500	1900	2400	3000	3800	5000	6200	7600	10,000	10,000	10,000	10,000
1 - 2	330	660	1100	1500	1900	2400	3000	3800	5000	6200	7600	10,000	10,000	10,000	10,000
2 1/2	120	540	1000	1400	1850	2400	3000	3800	5000	6200	7600	10,000	10,000	10,000	10,000
2 3/4		36	840	1300	1750	2300	2900	3700	4800	6200	7600	10,000	10,000	10,000	10,000
3 1/2			700	1200	1700	2300	2900	3700	4800	6200	7600	10,000	10,000	10,000	10,000
4			55	1100	1600	2200	2900	3700	4800	6200	7600	10,000	10,000	10,000	10,000
5 1/2 - 10				65	1350	2000	2800	3600	4800	6200	7600	10,000	10,000	10,000	10,000
15					110	1500	2300	3300	4500	5800	7500	10,000	10,000	10,000	10,000

**Notes:** This chart applies to Kearney Type KS fuse links coordinated with Type X fuse links. The table is applicable for both Fit-All cable fuse links and Trip-O-Link fuse links where the former is used in open and enclosed cutouts and the latter in open link cutouts. The chart is recommended for general use under usual conditions of service, subject to the general rule that the ratio of fuse link sizes should be as large as circumstances permit.

Intentionally left blank

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com

**Eaton's Power Systems Division**  
2300 Badger Drive  
Waukesha, WI 53188  
United States  
Eaton.com/cooperpowerseries

© 2017 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. TD325010EN  
October 2017

Eaton is a registered trademark.

All trademarks are property  
of their respective owners.

For Eaton's Cooper Power series product  
information  
call 1-877-277-4636 or visit:  
[www.eaton.com/cooperpowerseries](http://www.eaton.com/cooperpowerseries).