


Coordination chart for Kearney type T with type X fuse links

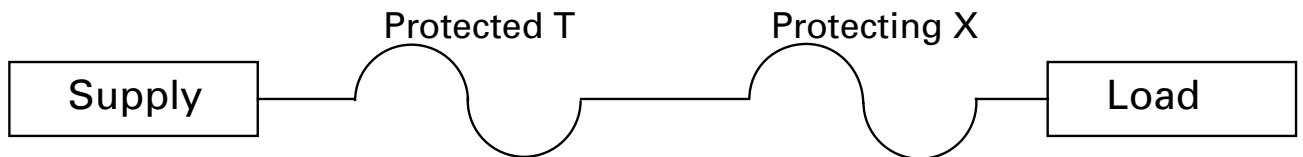

Protecting fuse type X	Protected fuse ampere rating type T												
	10	12	15	20	25	30	40	50	65	80	100	140	200
1/3 - 3/4	540	780	1050	1400	1700	2200	2800	3500	4500	5500	7200	10,000	10,000
1 - 2	500	740	1000	1400	1700	2200	2800	3500	4500	5500	7200	10,000	10,000
2 1/2	370	650	950	1300	1650	2200	2800	3500	4500	5500	7200	10,000	10,000
2 3/4		250	780	1200	1600	2100	2700	3500	4500	5500	7200	10,000	10,000
3 1/2		43	600	1050	1500	2000	2600	3500	4500	5500	7200	10,000	10,000
4			55	900	1400	1950	2600	3500	4500	5500	7200	10,000	10,000
5 1/2 - 10				70	1150	1800	2500	3400	4500	5500	7200	10,000	10,000
15					110	1200	2100	3000	4200	5400	7200	10,000	10,000

Notes: This chart applies to Kearney Type T fuse links coordinated with Type X Fuse Links. The table is applicable for both Fit-All fuse links and Trip-O-Link cable fuse links where the former is used in open and enclosed cutouts and the latter in open link cutouts. The chart is recommended for general use under usual conditions of service, subject to the general rule that the ratio of fuse link sizes should be as large as circumstances permit.

Intentionally left blank

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

Eaton's Power Systems Division
2300 Badger Drive
Waukesha, WI 53188
United States
Eaton.com/cooperpowerseries

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. TD325008EN
October 2017

Eaton is a registered trademark.

All trademarks are property
of their respective owners.

For Eaton's Cooper Power series product
information
call 1-877-277-4636 or visit:
www.eaton.com/cooperpowerseries.