

# Accessories for weatherproof Telephones



## Overview

The Secondary Receiver Set is used for connection to the weatherproof telephones ResistTel and ResistTel MB (analog version only). The receiver enables a third person to take part in telephone conversation. Moreover, it can be used to reduce disturbing environmental noises during a telephone call.

The Headset may be connected to all weatherproof telephones from the ResistTel line (analog and IP) and FernTel IP4 to improve communication in noisy environments, protect the user from harmful environmental noise and enable telephone calls while carrying out tasks that require the use of both hands.

The Headset and Secondary Receiver Set both include the mounting bracket as well as the required screws and cable glands for an installation at the telephone.

## Features

- Ingress protection IP54
- Secondary receiver enables a third person to take part in a telephone conversation
- Headset with approx. 15 m connection cable allows making telephone calls while carrying out tasks that require the use of both hands


### Technical data secondary receiver

Housing material	Polyurethan-Elastomer
Ingress protection	IP 54
Dimensions	Approx. 100 x 68 x 50 mm
Weight	Approx. 0,2 kg
Handset cable	Spiral cord, 2-pole
Temperature range	-20 °C to +60 °C

### Technical data headset

Connection cable	80 cm cord with connecting plug +14 m cord
Microphone	Electret noise-cancelling microphone with windshield and flexible goose-neck
Earpiece	Dynamic capsule
Ingress protection	IP 54
Temperature range	-30 °C to +70 °C

General arrangement  
all dimensions in mm

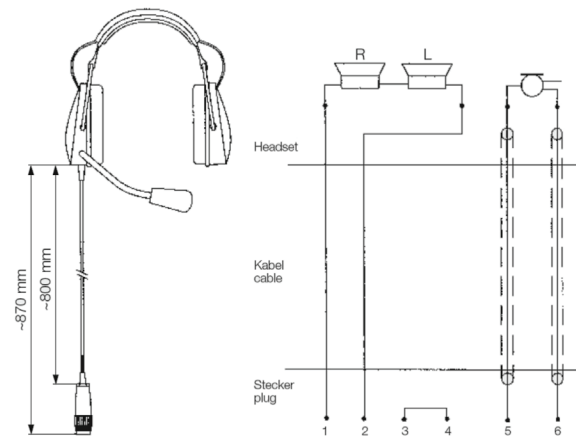

## Order requirements

Designation	Article number
Secondary Receiver Set	FHF 112 861 03
Headset	FHF 112 643 04