


Planète 400 Disc Emergency lighting
Product Brochure

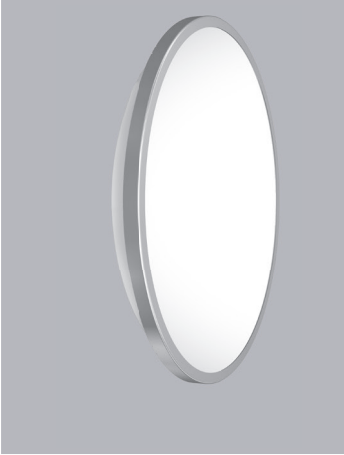

Planète400
DISC

EcoFriendly Emergency Lighting and Anti-Panic solutions
Versions : Self-contained / Luminaires for Central Battery system

Safety finds the light


EATON

Powering Business Worldwide



web

Planète 400 DISCRETE

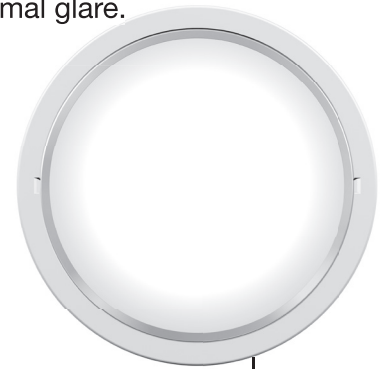

Discrete & unobtrusive

- Seamlessly integrates with the pure architectural lines of the building.
- Fits into the all-round light-theme concept.
- Shares the same standard diameter as most popular downlights.
- The standby-mode LED lighting (when mains-connected) is soft with a minimal glare.
- Recessed-mounting Recessed-mounting integration (close-fit mounting < 2mm thick - colors on request).

PRODUIT	Référence	Flash (Cd)	Flux en Lumens	IP	IK	Lampe	Batterie Ni-Cd	Conso
PLANETE 400 DISC	LUM17044	-	360	41	07	Leds	Eco Safe by SAFT 10 x 1,2 V / 0,6 Ah	1,5 W
PLANETE 400 DISC DL	LUM17045	white/100	360	41	07			



Delivery terms on request

PRODUIT	Référence	Alim.	Flux en Lumens	IP	IK	Lampe	Consommation	
							en CA (VA)	en CC (W)
PLANETE 24-48 /400 DISC	LUM22132	20 à 54 Vcc	400	41	07	LED	-	6
PLANETE 220 /400 DISC	LUM22133	220 Vcc-ca	360	41	07	LED	14	6,5
PLANETE 220 /400 DISC CG-S	LUM22136	220 Vcc-ca Adressable	360	41	07	LED	14	6,5

Delivery terms on request

Delivery terms on request

Delivery terms on request

Accessoires



TLU (LUM10312)

Safety baffle hanger CAP008893

Recessed-mounting trim LUM10541

Recessed-mounting trim in colour LUM10541COL



Colours on request, RAL to be specified.



> NF EN 60 598.2.22
Unit : NFC 71 820 NFC 71 801
Luminaire : C 71 802



> NF 413 (unit)
> NF 467 (luminaire)



> Power consumption : 1,4 W
> ESC* -eligible



> Zero relamping
Low maintenance



> Self-testing
Simple streamlined inspections
> Supervision



> All-coverage 4 year warranty + 6-year
step-down warranty on the battery

Qualité environnementale

All SC Planete 400 DISC units and luminaires have been ecodesigned for lower environmental impact throughout the product life-cycle (design, manufacturing, operational service, recycling). All are NF ENVIRONNEMENT-certified.



Get your old units picked up for recycling free from anywhere in France (find out more at www.recyclum.com)



EATON provides design engineers with PEPs (Product Environmental Profiles) that double up as environmental ID cards for the devices.

* Energy Savings Certificate



Glare control and photobiological safety

Invisible LED, deep-baffled so no direct glare.

Photobiological safety : LED lighting classified as danger-free according to standard NF EN 62471 and ANSES (French Agency for OHS) recommendations.



Innovations



360-lumens output in an ultra-slim 25-mm ø 190 disk.

High-performance micro-lens light diffuser.

Disk delivers uniform downlighting:

Homogeneous illumination for optimal visual comfort ($L_{max}/L_{min} > 1.5$).

Eco-designed unit with self-test technology (SATI) useable in ADDRESSABLE mode.

Unit offers long-life service of 10-plus years.



Fast-fit installation

Screwler terminal strips: automatic connectors.

Built-in housing for quick-and-easy mounting of the safety baffle hanger (metal cable thread).

Recessed-mounting trim options for structural or dropped ceilings:

- ø 200 mm downlight holesaw
- Shallow 65 mm recess.



Recommendations for Special Technical Specifications [CCTP], cover the bold-faced features



Powering Business Worldwide

Cooper Sécurité SAS (Groupe Eaton)

PEE II - Rue Beethoven
63204 Riom, France

Tél. 0 820 867 867 (0.118€/min)

Fax. 0 820 888 526

www.cooperfrance.com

www.eaton.com

The technical characteristics and dimensions given in this document may be modified at any time for technical, normative, regulatory or economic reasons. Eaton may in no way be held liable for the content of this information.

Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton.