Note: Iss D-E ECN 1670

solista maxi

9 ~ 60VDC											
Start-up current: < 22mA Courant de démarrage: < 22mA											
			Continuous			Single Flash			Double Flash		
			Low 0011	Med 0001	High 0000	Low 0011	Med 0001	High 0000	Low 0011	Med 0001	High 0000
	Red	12V	3mA	4mA	10mA	5mA	8mA	13mA	5mA	8mA	14mA
		24V	3mA	5mA	9mA	5mA	5mA	11mA	3mA	5mA	12mA
		48V	4mA	6mA	10mA	3mA	4mA	10mA	3mA	6mA	8mA
	Green	12V	3mA	4mA	10mA	5mA	8mA	13mA	5mA	8mA	14mA
		24V	3mA	5mA	9mA	5mA	5mA	11mA	3mA	5mA	12mA
		48V	4mA	6mA	10mA	3mA	4mA	10mA	3mA	6mA	8mA
	Amber	12V	3mA	4mA	10mA	5mA	8mA	13mA	5mA	8mA	14mA
		24V	3mA	5mA	9mA	5mA	5mA	11mA	3mA	5mA	12mA
		48V	4mA	6mA	10mA	3mA	4mA	10mA	3mA	6mA	8mA
	White	12V	3mA	4mA	10mA	5mA	8mA	13mA	5mA	8mA	14mA
		24V	3mA	5mA	9mA	5mA	5mA	11mA	3mA	5mA	12mA
		48V	4mA	6mA	10mA	3mA	4mA	10mA	3mA	6mA	8mA
	Blue	12V	3mA	5mA	15mA	6mA	12mA	15mA	5mA	10mA	10mA
		24V	3mA	5mA	12mA	4mA	9mA	21mA	3mA	9mA	7mA
		48V	4mA	6mA	12mA	5mA	7mA	12mA	3mA	5mA	7mA
2 2 0.5mm ~ 2.5mm											
-10°C ~ +55°C											
FR ABS & Polycarbonate Translucent											
S IP 21C	D IP 65										
1 Hz											

WARNING:
Do NOT use high voltage testers if ANY equipment is connected to the system.

ATTENTION:
Ne PAS utitliser de testeurs haute tension lorsqu'un équipement est connecté au system.

Fulleon Ltd, Llantarnam Park, Cwmbran, NP44 3AW
www.fulleon.com

25-8289-E



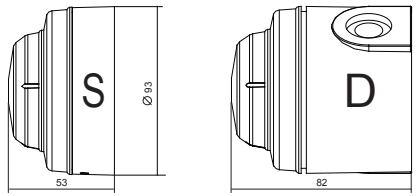



(i) Earth screen must be continuous along entire length of loop.
(i) Option: l'ensemble du câble peut être protégé par écran.



		Switches/Interrupteurs			
		1	2	3	4
Flash rate	Continuous	0 1	0 0		
	1Flash	1	1		
	2Flash	0	1		
Current setting	Low			1	1
	Medium			0	1
	High			1 0	0 0



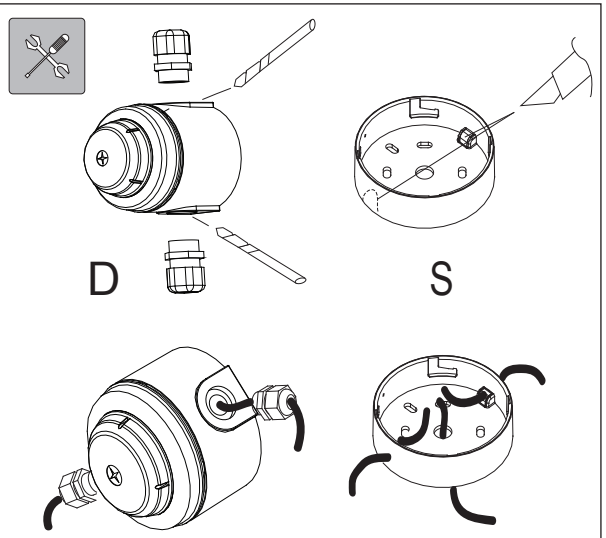

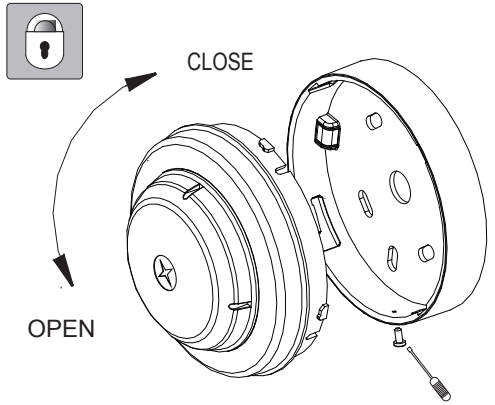

Care should be taken to ensure the cable does not put stress on the circuit board.

Veuillez vous assurer que le cable ne créé pas de pression sur le circuit imprimé.

Supplied Format

Electronic Data [X]

File Name : 25-8289-E

Text Pages

No. of Text Pages : 1
Print Colours : 1
Paper Spec : Stock White 70gsm

Finished Manual / Leaflet

Type of Binding : None
Hole Punching : None
Shrink Wrapping : None
Folding Details : See below
Final Dimensions :

- [ ] A5 (148.5x210mm) Single Sided
- [ ] A5 (148.5x210mm) Double Sided
- [X] A4 (297x210mm) Single Sided
- [ ] A4 (297x210mm) Double Sided



Manual Details

Part No.	25-8289-E
Description	Leaflet
Model	
Date	06/04/11
Issue No.	E

Approvals

Originated	G. Haack
Checked	
Approved	

Fulleon