

# CFEAPULL - Emergency assist alarm pull cord unit

## Device overview and specification

The CFEAPULL Pull Cord Unit forms part of the CFEAPULLKIT Emergency Assist Alarm System.

Operating voltage	12V dc (nominal)
Construction	PC
Dimensions (mm)	H 87 x W 87 x D 30.5 (+cord)

**Note:** Unit fits on to standard single gang back box



## Extra low voltage (ELV) wiring

Always segregate low voltage wiring from the mains wiring.


System requires minimum 2 core 0.4mm<sup>2</sup> cable.

It should be noted that the wiring order of the various system components can be changed to suit a specific application and/or to reduce wiring runs.

All wall-mounting devices should be mounted onto a back box of the required depth.

## Wiring guide using 2 core cable

Out	In
PSU 12V supply	Over door indicator
Over door indicator	Cancel unit
Cancel unit	Pull corded unit

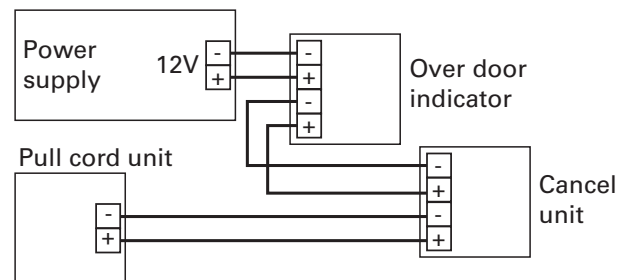

Powering Business Worldwide

**Eaton Electrical Systems Ltd**  
Wheatley Hall Road  
Doncaster  
South Yorkshire  
DN2 4NB

**Eaton**  
EMEA Headquarters  
Route de la Longeraie 7  
1110 Morges, Switzerland  
Eaton.eu

© 2018 Eaton  
All Rights Reserved  
Publication No. TD450146EN / CSSC-1523  
Version 1, August 2018

Eaton is a registered trademark.  
All other trademarks are property  
of their respective owners.