

Check Valves




Pilot Operated Check Valve

4CT-06-(D)*-21

4CS-06-(D)*-21


4CG-06-(D)*-21

Model	Spring	Pressure PSI	Check- Valve	Guide/ Poppet
4C*-06-A-21	354636	30	359859	359860
4C*-06-DA-21			342366	354644
4C*-06-B-21	386660	50	359859	359860
4C*-06-DB-21			342366	354644
4C*-06-C-21	388352	75	359859	359860
4C*-06-DC-21			342366	354644
4C*-06-F-21	388353	150	359859	388358
4C*-06-DF-21			342366	388359

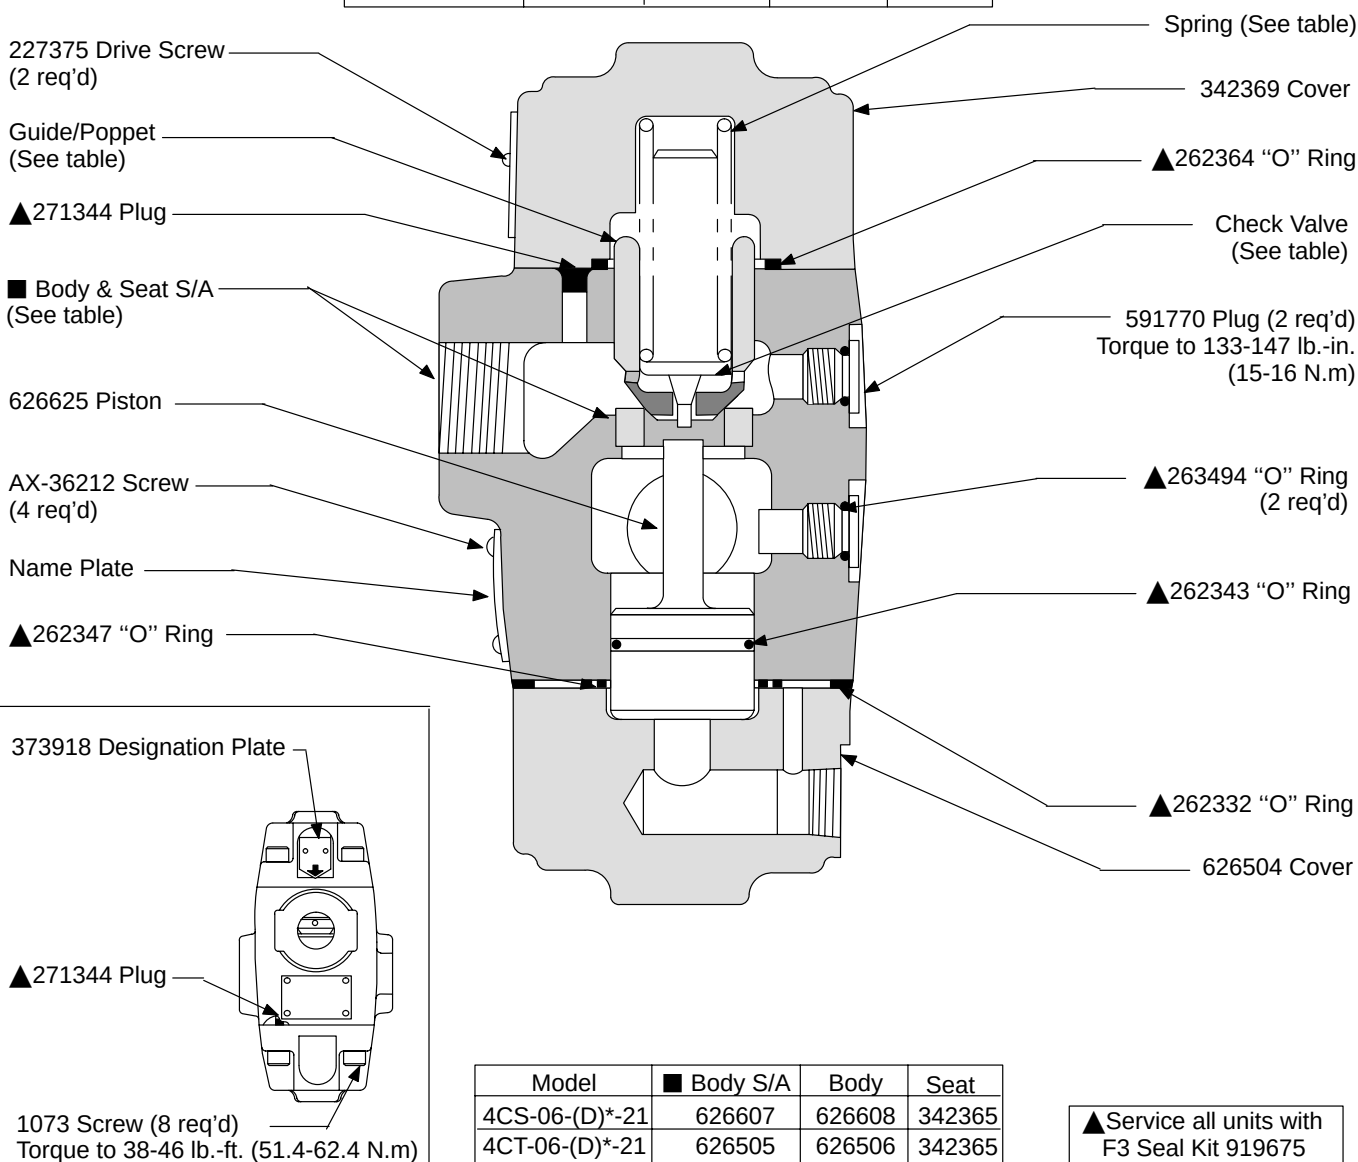

Model Code

(F3) - 4C * - 06 - (D) * - 21



1 Seals (F3) - Seals for mineral oil and fire resistant fluids	4 Series 06 - 60	6 Pressure Range A - 30 PSI B - 50 PSI C - 75 PSI D - 150 PSI
2 Model Series 4C - Pilot operated check valve	5 Features D - Decompression (Omit for no decompression)	7 Design
3 Connection G - Subplate mounted S - SAE straight thread connection T - NPTF threaded connection		

4CG-06-(D)*-21

▲Service all units with
F3 Seal Kit 919675

626507 Body & Seat
S/A Includes:
342365 Seat
626508 Body

Model	Spring	Pressure PSI	Check- Valve	Guide/ Poppet
4CG-06-A-21	354636	30	359860	359859
4CG-06-DA-21			354644	342366
4CG-06-B-21	386660	50	359860	359859
4CG-06-DB-21			354644	342366
4CG-06-C-21	388352	75	359860	359859
4CG-06-DC-21			354644	342366
4CG-06-F-21	388353	150	388358	359859
4CG-06-DF-21			388359	342366

