

SG14011



### Description

- High-quality residual current device / miniature circuit breaker combination, line voltage-independent
- Contact position indicator red - green
- Fault current tripping indicator white - blue
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories can be mounted subsequently
- Wide variety of rated tripping currents
- Rated currents up to 20 A
- Tripping characteristics B, C
- Rated breaking capacity 10 kA

$I_n/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
---------------------------	---------------------	-------------	----------------------

**Type A**

**10 kA, 2-pole**  
**Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, type A**

SG14011



**Characteristic B**

10/0.03	PKPM2-10/2/B/003-A	108105	1/60
13/0.03	PKPM2-13/2/B/003-A	108106	1/60
16/0.03	PKPM2-16/2/B/003-A	108107	1/60
20/0.03	PKPM2-20/2/B/003-A	108108	1/60
10/0.1	PKPM2-10/2/B/01-A	108113	1/60
13/0.1	PKPM2-13/2/B/01-A	108114	1/60
16/0.1	PKPM2-16/2/B/01-A	108115	1/60
20/0.1	PKPM2-20/2/B/01-A	108116	1/60
10/0.3	PKPM2-10/2/B/03-A	111634	1/60
13/0.3	PKPM2-13/2/B/03-A	111635	1/60
16/0.3	PKPM2-16/2/B/03-A	111636	1/60
20/0.3	PKPM2-20/2/B/03-A	111637	1/60

SG14011



**Characteristic C**

6/0.03	PKPM2-6/2/C/003-A	111638	1/60
10/0.03	PKPM2-10/2/C/003-A	108109	1/60
13/0.03	PKPM2-13/2/C/003-A	108110	1/60
16/0.03	PKPM2-16/2/C/003-A	108111	1/60
20/0.03	PKPM2-20/2/C/003-A	108112	1/60
10/0.1	PKPM2-10/2/C/01-A	108117	1/60
13/0.1	PKPM2-13/2/C/01-A	108118	1/60
16/0.1	PKPM2-16/2/C/01-A	108119	1/60
20/0.1	PKPM2-20/2/C/01-A	108120	1/60
6/0.3	PKPM2-6/2/C/03-A	111639	1/60
10/0.3	PKPM2-10/2/C/03-A	111640	1/60
13/0.3	PKPM2-13/2/C/03-A	111641	1/60
16/0.3	PKPM2-16/2/C/03-A	111642	1/60
20/0.3	PKPM2-20/2/C/03-A	111643	1/60

**Type AC**

**10 kA, 2-pole**  
**Conditionally surge current-proof 250 A, type AC**

SG14011



**Characteristic B**

10/0.03	PKPM2-10/2/B/003	111597	1/60
13/0.03	PKPM2-13/2/B/003	111598	1/60
16/0.03	PKPM2-16/2/B/003	111599	1/60
20/0.03	PKPM2-20/2/B/003	111600	1/60
10/0.3	PKPM2-10/2/B/03	111602	1/60
13/0.3	PKPM2-13/2/B/03	111603	1/60
16/0.3	PKPM2-16/2/B/03	111604	1/60
20/0.3	PKPM2-20/2/B/03	111605	1/60

SG14011



**Characteristic C**

6/0.03	PKPM2-6/2/C/003	111622	1/60
10/0.03	PKPM2-10/2/C/003	111623	1/60
13/0.03	PKPM2-13/2/C/003	111624	1/60
16/0.03	PKPM2-16/2/C/003	111625	1/60
20/0.03	PKPM2-20/2/C/003	111626	1/60
6/0.3	PKPM2-6/2/C/03	111627	1/60
10/0.3	PKPM2-10/2/C/03	111628	1/60
13/0.3	PKPM2-13/2/C/03	111629	1/60
16/0.3	PKPM2-16/2/C/03	111630	1/60
20/0.3	PKPM2-20/2/C/03	111631	1/60

---

**Specifications | Combined RCD/MCB Devices PKP.2, 2-pole**


---

**Description**

- Combined RCD/MCB Devices
- Line voltage-independent tripping
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Guide for secure terminal connection
- Switching toggle (MCB component) in colour designating the rated current
- Contact position indicator red - green
- Fault current tripping indicator white - blue
- Comprehensive range of accessories can be mounted subsequently
- The test key "T" must be pressed every 6 month. The system operator must be informed of this obligation and his responsibility in a way that can be proven (self-adhesive RCD-label enclosed). The test interval of 6 month is valid for residential and similar applications. Under all other conditions (e.g. damply or dusty environments), it's recommended to test in shorter intervals (e.g. monthly).
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement ( $R_E$ ), or proper checking of the earth conductor condition redundant, which must be performed separately.
- **Type -A:** Protects against special forms of residual pulsating DC which have have not been smoothed


**Accessories:**

Tripping signal switch for subsequent installation	ZP-IHK	286052
Shunt trip release	ZP-ASA/..	248438, 248439


**Technical Data**

		<b>PKP.2, 2-pole</b>
<b>Electrical</b>		
Design according to		IEC/EN 61009
Current test marks as printed onto the device		
Line voltage-independent tripping		instantaneous 250 A (8/20 $\mu$ s), surge current proof
Rated voltage	$U_e$	230 V AC; 50 Hz
Operational voltage range		196-253 V
Rated tripping current	$I_{\Delta n}$	30, 100, 300 mA
Rated non-tripping current	$I_{\Delta no}$	0.5 $I_{\Delta n}$
Sensitivity		AC and pulsating DC
Selectivity class		3
Rated breaking capacity	$I_{cn}$	
PKPM2		10 kA
PKP62		6 kA
PKP42		4.5 kA
Rated current		6 - 40 A
Rated impulse withstand voltage	$U_{imp}$	4 kV (1.2/50 $\mu$ s)
Characteristic		B, C
Maximum back-up fuse (short circuit)		100 A gL (>10 kA)
Endurance		
electrical components		$\geq$ 4,000 switching operations
mechanical components		$\geq$ 20,000 switching operations
<b>Mechanical</b>		
Frame size		45 mm
Device height		80 mm
Device width		35 mm (2MU)
Mounting		3-position DIN rail clip, permits removal from existing busbar system
Degree of protection, switch		IP20
Degree of protection, built-in		IP40
Upper and lower terminals		open mouthed/lift terminals
Terminal protection		finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity		1 - 25 mm <sup>2</sup>
Terminal torque		2 - 2.4 Nm
Busbar thickness		0.8 - 2 mm
Tripping temperature		-25°C to +40°C
Storage- and transport temperature		-35°C to +60°C
Resistance to climatic conditions		according to IEC/EN 61009

**Connection diagram**



**Dimensions (mm)**

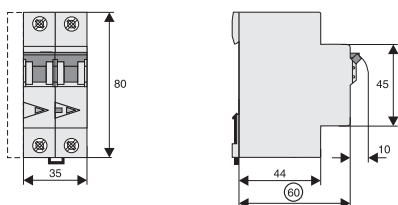

### PKPM2: Influence of ambient temperature on load carrying capacity

- Values = max. allowed current in Ampere at the specific temperature
- Temperature factor (%/K) = 0.5


$I_n$ [A]	Ambient temperature / °C									
	-40	-30	-25	-20	-10	0	10	20	30	40
6	8.1	7.8	7.7	7.5	7.2	6.9	6.6	6.3	6.0	5.7
10	13.5	13.0	12.8	12.5	12.0	11.5	11.0	10.5	10.0	9.5
13	17.6	16.9	16.6	16.3	15.6	15.0	14.3	13.7	13.0	12.4
16	21.6	20.8	20.4	20.0	19.2	18.4	17.6	16.8	16.0	15.2
20	27.0	26.0	25.5	25.0	24.0	23.0	22.0	21.0	20.0	19.0

### PKP62, PKP42: Influence of ambient temperature on load carrying capacity

- Values = max. allowed current in Ampere at the specific temperature
- Temperature factor (%/K) = 0.5

$I_n$ [A]	Ambient temperature / °C									
	-40	-30	-25	-20	-10	0	10	20	30	40
6	8.1	7.8	7.7	7.5	7.2	6.9	6.6	6.3	6.0	5.7
10	13.5	13.0	12.8	12.5	12.0	11.5	11.0	10.5	10.0	9.5
13	17.6	16.9	16.6	16.3	15.6	15.0	14.3	13.7	13.0	12.4
16	21.6	20.8	20.4	20.0	19.2	18.4	17.6	16.8	16.0	15.2
20	27.0	26.0	25.5	25.0	24.0	23.0	22.0	21.0	20.0	19.0
25	33.8	32.5	31.9	31.3	30.0	28.8	27.5	26.3	25.0	23.8
32	43.2	41.6	40.8	40.0	38.4	36.8	35.2	33.6	32.0	30.4
40	54.0	52.0	51.0	50.0	48.0	46.0	44.0	42.0	40.0	38.0

### Tripping Characteristic PKP.2, Characteristics B and C

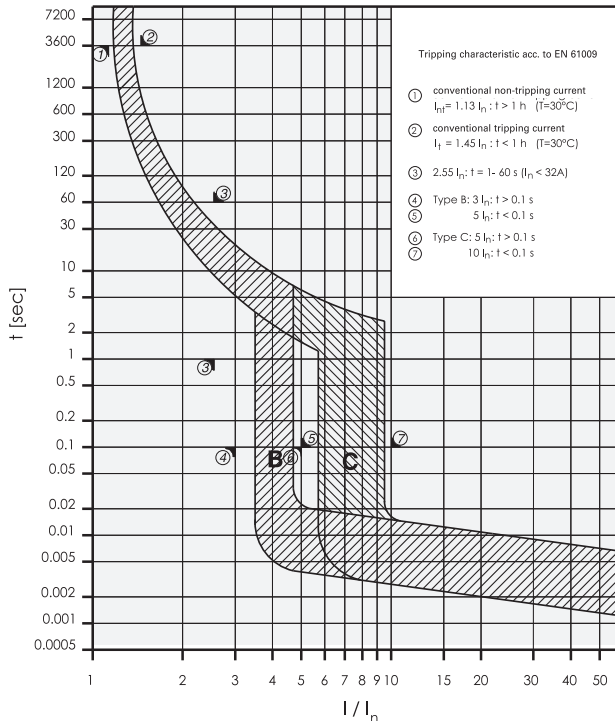

**Short Circuit Selectivity PKPM2 towards Neozed<sup>1)</sup> / Diazed<sup>2)</sup> / NH00<sup>3)</sup>**

Short circuit currents in kA, rated currents of fuses in A

Short circuit selectivity **PKPM2** towards **Neozed** <sup>1)</sup>

PKPM2 Neozed <sup>1)</sup>											
I <sub>n</sub> [A]	16	20	25	32	35	40	50	63	80	100	
<b>B10</b>	<0.5	0.5	0.9	2	2.3	3.7	8	10	10	10	
<b>B13</b>	<0.5	0.5	0.8	1.7	1.9	3	6	10	10	10	
<b>B16</b>		0.5	0.7	1.5	1.7	2.4	4.4	6.8	10	10	
<b>B20</b>			0.7	1.4	1.5	2.2	3.9	6	9.2	10	
<b>C10</b>	<0.5	0.5	0.8	1.7	1.9	3	6.1	10	10	10	
<b>C13</b>	<0.5	0.5	0.7	1.6	1.8	2.8	5.5	9.5	10	10	
<b>C16</b>		<0.5	0.7	1.3	1.5	2.2	4	6.2	10	10	
<b>C20</b>			0.6	1.3	1.4	2.1	3.7	5.6	8.5	10	

Short circuit selectivity **PKPM2** towards **Diazed** <sup>2)</sup>

PKPM2 Diazed <sup>2)</sup>											
I <sub>n</sub> [A]	16	20	25	32	35	50	63	80	100		
<b>B10</b>	<0.5	0.5	0.9	1.8	2.9	5.6	10	10	10		
<b>B13</b>	<0.5	0.5	0.8	1.5	2.4	4.5	10	10	10		
<b>B16</b>		0.5	0.8	1.3	2	3.4	8	10	10		
<b>B20</b>			0.7	1.3	1.9	3.1	7.1	10	10		
<b>C10</b>	<0.5	0.5	0.8	1.5	2.4	4.4	10	10	10		
<b>C13</b>	<0.5	0.5	0.8	1.4	2.3	4.2	10	10	10		
<b>C16</b>		<0.5	0.7	1.2	1.9	3.2	7.6	10	10		
<b>C20</b>			0.7	1.2	1.8	2.9	6.5	9.7	10		

Short circuit selectivity **PKPM2** towards **NH00** <sup>3)</sup>

PKPM2 NH00 <sup>3)</sup>														
I <sub>n</sub> [A]	16	20	25	32	35	40	50	63	80	100	125	160		
<b>B10</b>	<0.5	<0.5	0.8	1.5	2.3	3.2	5.7	9.1	10	10	10	10		
<b>B13</b>	<0.5	<0.5	0.8	1.3	1.9	2.7	4.4	6.5	10	10	10	10		
<b>B16</b>		<0.5	0.7	1.1	1.6	2.2	3.4	4.8	8	10	10	10		
<b>B20</b>			0.6	1	1.4	2	3.1	4.3	7	10	10	10		
<b>C10</b>	<0.5	<0.5	0.7	1.3	1.9	2.7	4.5	6.9	10	10	10	10		
<b>C13</b>	<0.5	<0.5	0.7	1.2	1.8	2.5	4.1	6.1	10	10	10	10		
<b>C16</b>		<0.5	0.6	1	1.5	2	3.1	4.4	7.5	10	10	10		
<b>C20</b>			0.6	0.9	1.4	1.9	2.9	4.1	6.5	10	10	10		

Darker areas: no selectivity

- <sup>1)</sup> SIEMENS Type 5SE2; Size: D01, D02, D03; Operating class gG; Rated voltage: AC 400 V/DC 250 V
- <sup>2)</sup> SIEMENS Type 5SB2, 5SB4, 5SC2; Size: DII, DIII, DIV; Operating class gG; Rated voltage: AC 500 V/DC 500 V
- <sup>3)</sup> SIEMENS Type 3NA3 8, 3NA6 8, 3NA7 8; Size: 000, 00; Operating class gG; Rated voltage: AC 500 V/DC 250 V

### Short Circuit Selectivity PKP62 towards Neozed<sup>1)</sup> / Diazed<sup>2)</sup> / NH00<sup>3)</sup>

Short circuit currents in kA, rated currents of fuses in A

Short circuit selectivity **PKP62** towards **Neozed** <sup>1)</sup>

PKP62	Neozed <sup>1)</sup>									
I <sub>n</sub> [A]	16	20	25	32	35	40	50	63	80	100
B10	<0.5	0.5	0.9	2	2.3	3.7	6	6	6	6
B13	<0.5	0.5	0.8	1.7	1.9	3	6	6	6	6
B16		0.5	0.7	1.5	1.7	2.4	4.4	6	6	6
B20			0.7	1.4	1.5	2.2	4	6	6	6
B25				1.2	1.3	1.8	3.1	4.7	6	6
B32					1.2	1.7	2.7	3.8	5.5	6
B40						1.3	1.7	2.2	2.7	4.2
C10	<0.5	0.5	0.8	1.7	1.9	3	6	6	6	6
C13	<0.5	0.5	0.7	1.6	1.8	2.8	5.5	6	6	6
C16		<0.5	0.7	1.3	1.5	2.2	4	6	6	6
C20			0.6	1.3	1.4	2.1	3.7	5.6	6	6
C25				1.1	1.3	1.8	2.8	3.9	5.6	6
C32					1.2	1.7	2.6	3.6	5.1	6
C40						1.3	1.9	3.3	3.2	5.8

Short circuit selectivity **PKP62** towards **Diazed** <sup>1)</sup>

PKP62	Diazed <sup>2)</sup>									
I <sub>n</sub> [A]	16	20	25	32	35	50	63	80	100	
B10	<0.5	0.5	0.9	1.8	2.9	5.6	6	6	6	
B13	<0.5	0.5	0.8	1.5	2.4	4.5	6	6	6	
B16		0.5	0.8	1.3	2	3.4	6	6	6	
B20			0.7	1.3	1.9	3.1	6	6	6	
B25				1.1	1.5	2.4	5.5	6	6	
B32					1.4	2.1	4.3	6	6	
B40						1.4	2.4	2.9	5.1	
C10	<0.5	0.5	0.8	1.5	2.4	4.4	6	6	6	
C13	<0.5	0.5	0.8	1.4	2.3	4.2	6	6	6	
C16		<0.5	0.7	1.2	1.9	3.2	6	6	6	
C20			0.7	1.2	1.8	2.9	6	6	6	
C25				1.1	1.5	2.3	4.4	6	6	
C32					1.4	2.2	4.1	5.6	6	
C40						1.6	2.8	3.6	6	

Short circuit selectivity **PKP62** towards **NH00** <sup>3)</sup>

PKP62	NH00 <sup>3)</sup>												
I <sub>n</sub> [A]	16	20	25	32	35	40	50	63	80	100	125	160	
B10	<0.5	<0.5	0.8	1.5	2.3	3.2	5.7	6	6	6	6	6	
B13	<0.5	<0.5	0.8	1.3	1.9	2.7	4.4	6	6	6	6	6	
B16		<0.5	0.7	1.1	1.6	2.2	3.4	4.8	6	6	6	6	
B20			0.6	1	1.4	2	3.1	4.3	6	6	6	6	
B25				0.9	1.2	1.6	2.4	3.4	5.5	6	6	6	
B32					1.1	1.4	2.1	2.9	4.3	6	6	6	
B40							1.4	1.9	2.8	4.1	6	6	
C10	<0.5	<0.5	0.7	1.3	1.9	2.7	4.5	6	6	6	6	6	
C13	<0.5	<0.5	0.7	1.2	1.8	2.5	4.1	6	6	6	6	6	
C16		<0.5	0.6	1	1.5	2	3.1	4.4	6	6	6	6	
C20			0.6	0.9	1.4	1.9	2.9	4.1	6	6	6	6	
C25				0.9	1.2	1.6	2.3	3	4.6	6	6	6	
C32					1.1	1.5	2.1	2.8	4.3	6	6	6	
C40							1.5	2.1	3.1	5.4	6	6	

Darker areas: no selectivity

<sup>1)</sup> SIEMENS Type 5SE2; Size: D01, D02, D03; Operating class gG; Rated voltage: AC 400 V/DC 250 V

<sup>2)</sup> SIEMENS Type 5SB2, 5SB4, 5SC2; Size: DII, DIII, DIV; Operating class gG; Rated voltage: AC 500 V/DC 500 V

<sup>3)</sup> SIEMENS Type 3NA3 8, 3NA6 8, 3NA7 8; Size: 000, 00; Operating class gG; Rated voltage: AC 500 V/DC 250 V

**Short Circuit Selectivity PKP42 towards Neozed<sup>1)</sup> / Diazed<sup>2)</sup> / NH00<sup>3)</sup>**

Short circuit currents in kA, rated currents of fuses in A

Short circuit selectivity **PKP42** towards **Neozed<sup>1)</sup>**

PKP42	Neozed <sup>1)</sup>										
	I <sub>n</sub> [A]	16	20	25	32	35	40	50	63	80	100
<b>B10</b>	<0.5	0.5	0.9	2	2.3	3.7	4.5	4.5	4.5	4.5	4.5
<b>B13</b>	<0.5	0.5	0.8	1.7	1.9	3	4.5	4.5	4.5	4.5	4.5
<b>B16</b>		0.5	0.7	1.5	1.7	2.4	4.4	4.5	4.5	4.5	4.5
<b>B20</b>			0.7	1.4	1.5	2.2	4	4.5	4.5	4.5	4.5
<b>B25</b>				1.2	1.3	1.8	3.1	4.7	4.5	4.5	4.5
<b>B32</b>					1.2	1.7	2.7	3.8	4.5	4.5	4.5
<b>B40</b>						1.3	1.7	2.2	2.7	4.2	4.5
<b>C10</b>	<0.5	0.5	0.8	1.7	1.9	3	4.5	4.5	4.5	4.5	4.5
<b>C13</b>	<0.5	0.5	0.7	1.6	1.8	2.8	4.5	4.5	4.5	4.5	4.5
<b>C16</b>		<0.5	0.7	1.3	1.5	2.2	4	4.5	4.5	4.5	4.5
<b>C20</b>			0.6	1.3	1.4	2.1	3.7	4.5	4.5	4.5	4.5
<b>C25</b>				1.1	1.3	1.8	2.8	3.9	4.5	4.5	4.5
<b>C32</b>					1.2	1.7	2.6	3.6	4.5	4.5	4.5
<b>C40</b>						1.3	1.9	3.3	3.2	4.5	4.5

Short circuit selectivity **PKP42** towards **Diazed<sup>1)</sup>**

PKP42	Diazed <sup>2)</sup>									
	I <sub>n</sub> [A]	16	20	25	32	35	50	63	80	100
<b>B10</b>	<0.5	0.5	0.9	1.8	2.9	4.5	4.5	4.5	4.5	4.5
<b>B13</b>	<0.5	0.5	0.8	1.5	2.4	4.5	4.5	4.5	4.5	4.5
<b>B16</b>		0.5	0.8	1.3	2	3.4	4.5	4.5	4.5	4.5
<b>B20</b>			0.7	1.3	1.9	3.1	4.5	4.5	4.5	4.5
<b>B25</b>				1.1	1.5	2.4	4.5	4.5	4.5	4.5
<b>B32</b>					1.4	2.1	4.3	4.5	4.5	4.5
<b>B40</b>						1.4	2.4	2.9	4.5	4.5
<b>C10</b>	<0.5	0.5	0.8	1.5	2.4	4.4	4.5	4.5	4.5	4.5
<b>C13</b>	<0.5	0.5	0.8	1.4	2.3	4.2	4.5	4.5	4.5	4.5
<b>C16</b>		<0.5	0.7	1.2	1.9	3.2	4.5	4.5	4.5	4.5
<b>C20</b>			0.7	1.2	1.8	2.9	4.5	4.5	4.5	4.5
<b>C25</b>				1.1	1.5	2.3	4.4	4.5	4.5	4.5
<b>C32</b>					1.4	2.2	4.1	4.5	4.5	4.5
<b>C40</b>						1.6	2.8	3.6	4.5	4.5

Short circuit selectivity **PKP42** towards **NH00<sup>3)</sup>**

PKP42	NH00 <sup>3)</sup>												
	I <sub>n</sub> [A]	16	20	25	32	35	40	50	63	80	100	125	160
<b>B10</b>	<0.5	<0.5	0.8	1.5	2.3	3.2	4.5	4.5	4.5	4.5	4.5	4.5	4.5
<b>B13</b>	<0.5	<0.5	0.8	1.3	1.9	2.7	4.4	4.5	4.5	4.5	4.5	4.5	4.5
<b>B16</b>		<0.5	0.7	1.1	1.6	2.2	3.4	4.5	4.5	4.5	4.5	4.5	4.5
<b>B20</b>			0.6	1	1.4	2	3.1	4.3	4.5	4.5	4.5	4.5	4.5
<b>B25</b>				0.9	1.2	1.6	2.4	3.4	4.5	4.5	4.5	4.5	4.5
<b>B32</b>					1.1	1.4	2.1	2.9	4.3	4.5	4.5	4.5	4.5
<b>B40</b>						1.4	1.9	2.8	4.1	4.5	4.5	4.5	4.5
<b>C10</b>	<0.5	<0.5	0.7	1.3	1.9	2.7	4.5	4.5	4.5	4.5	4.5	4.5	4.5
<b>C13</b>	<0.5	<0.5	0.7	1.2	1.8	2.5	4.1	4.5	4.5	4.5	4.5	4.5	4.5
<b>C16</b>		<0.5	0.6	1	1.5	2	3.1	4.4	4.5	4.5	4.5	4.5	4.5
<b>C20</b>			0.6	0.9	1.4	1.9	2.9	4.1	4.5	4.5	4.5	4.5	4.5

Darker areas: no selectivity

<sup>1)</sup> SIEMENS Type 5SE2; Size: D01, D02, D03; Operating class gG; Rated voltage: AC 400 V/DC 250 V


<sup>2)</sup> SIEMENS Type 5SB2, 5SB4, 5SC2; Size: DII, DIII, DIV; Operating class gG; Rated voltage: AC 500 V/DC 500 V

<sup>3)</sup> SIEMENS Type 3NA3 8, 3NA6 8, 3NA7 8; Size: 000, 00; Operating class gG; Rated voltage: AC 500 V/DC 250 V




#### Let-through Energy PKP.2-../2/


Let-through Energy PKPM2, Characteristic B, 2-pole

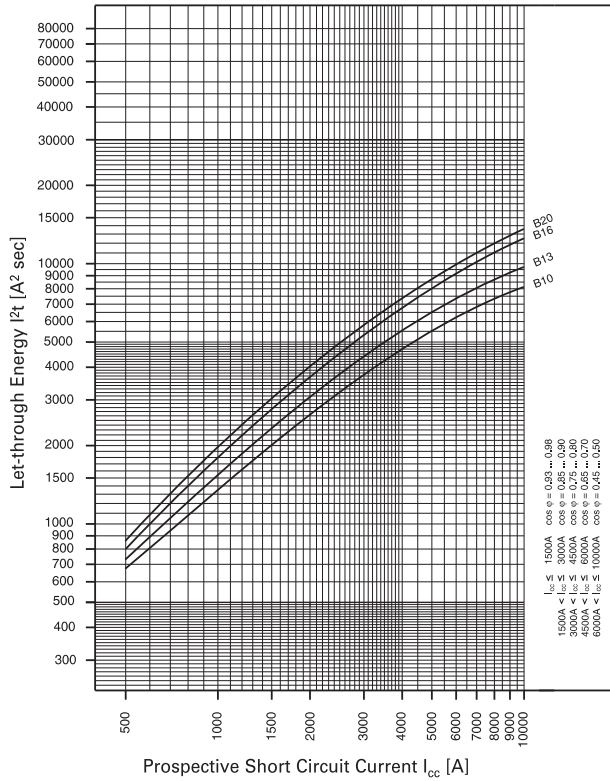


Let-through Energy PKPM2, Characteristic C, 2-pole

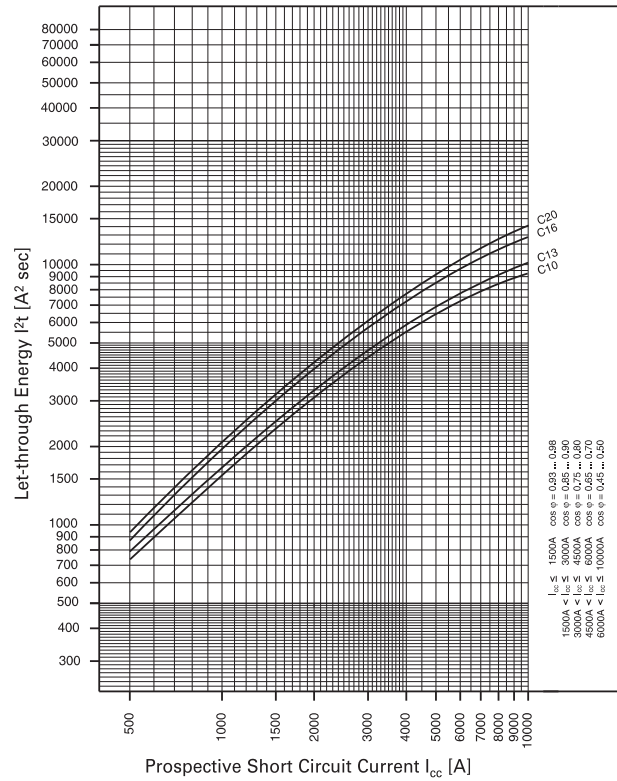


Let-through Energy PKP62, Characteristic B, 2-pole

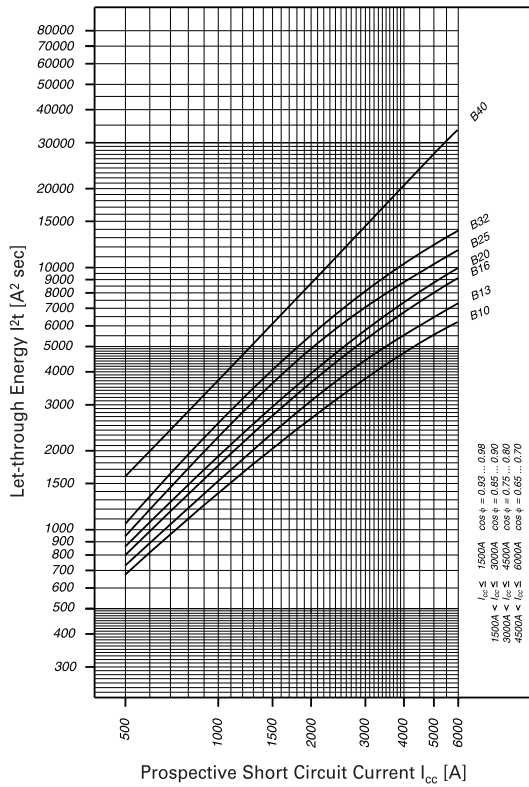

Let-through Energy PKP62, Characteristic C, 2-pole

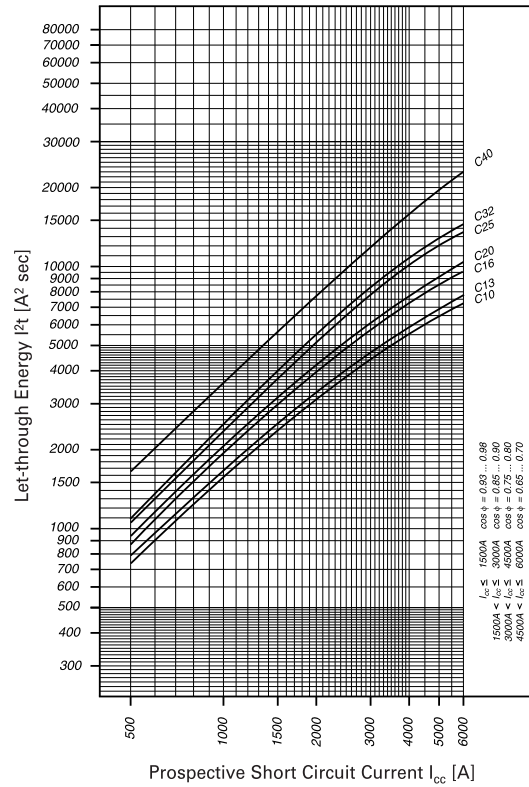

Let-through Energy PKP42, Characteristic B, 2-pole

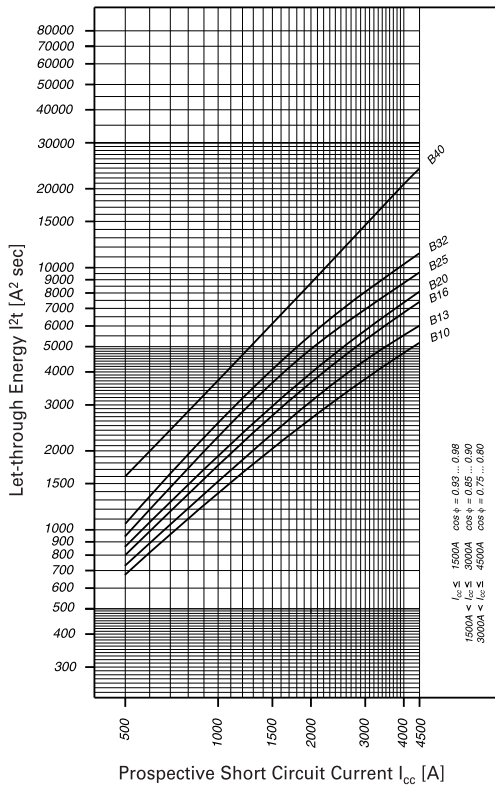

Let-through Energy PKP42, Characteristic C, 2-pole

