

Series DTEF 625 DN50 PN10

1) min. for element change without discharge pipe 520 min. for element change with discharge pipe 685

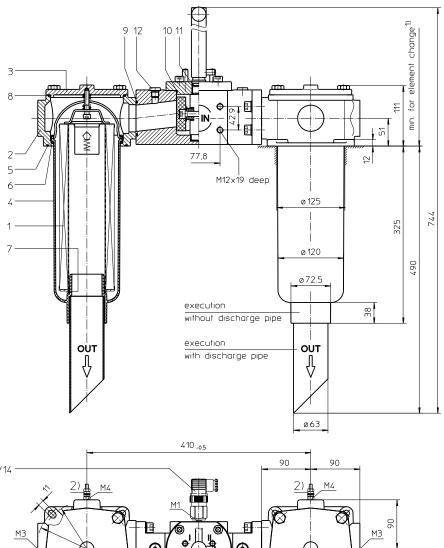

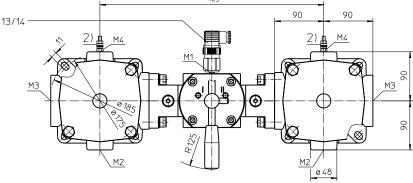

2) Connection for the potential equalization, only for application in the explosive area.

Position I: left filter-side in operation Position II: right filter-side in operation

Weight: approx. 15 kg

Dimensions: mm

Designs and performance values are subject to change.



Return Line Filter Series DTEF 625 DN50 PN10

Description:

Return-line filter series DTEF 625 have a working pressure up to 10 bar. Pressure peaks will be absorbed by a sufficient margin of safety.

The DTEF-filters are directly mounted to the reservoir and connected to the return-line.

A rotary slide valve which is integrated in the middle of the housing makes it possible to switch from the dirty filter-side to the clean filter-side without interrupting operation.

The filter element consists of a star-shaped, pleated filter material which is supported on the inside by a perforated core tube and is bonded to the end caps with a high-quality adhesive. The flow is from outside to inside.

For cleaning the stainless steel mesh element (see special leaflets 21070-4 and 39448-4) or changing the filter element, remove the cover and take out the element. The mesh elements are not guaranteed to maintain 100% performance after cleaning.

For filtration finer than 40 μm use the disposable elements made of paper or microglass. Filter elements as fine as 5 $\mu m(c)$ are available; finer filter elements on request.


Eaton filter elements are known as stable elements which have excellent filtration capabilities and a high dirt retaining capacity, therefore having a long service life.

Eaton filter can be used for petroleum-based fluids, HW emulsions, water glycols, most synthetic fluids and lubrication fluids. Consult factory for specific fluid applications.

When changing the filter element, a detachable connection between the filter head and the filter bowl prevents dirty oil from flowing into the tank.

1. Type index:

1.1. Complete filter: (ordering example

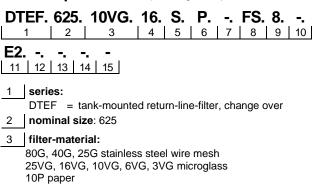

4 | filter element collapse rating:

16 = Δp 16 bar

5 | filter element design:

E = without by-pass valve

S = with by-pass valve $\Delta p 2,0$ bar

6 sealing material:

P = Nitrile (NBR) V = Viton (FPM)

7 | filter element specification: (see catalog)

= standard

IS06 = for HFC application, see sheet-no. 31601

8 process connection:

FS = SAE-flange connection 3000 PSI

9 process connection size:

8 = 2"

10 | filter housing specification: (see catalog)

- = standard

IS06 = for HFC application, see sheet-no. 31605

IS10 = for ATEX, see shet-no. 68267

IS11 = for mining applications, see sheet-no. 40530

11 clogging indicator at M1:

= without

O = visual, see sheet-no. 1616

E1 = pressure switch, see sheet-no. 1616

E2 = pressure switch, see sheet-no. 1616

E5 = pressure switch, see sheet-no. 1616

12 clogging indicator at M2:

possible indicators see position 11 of the type index

13 clogging indicator at M3:

possible indicators see position 11 of the type index

14 clogging indicator at M4:

possible indicators see position 11 of the type index


15 discharge pipe:

= without

1 = with discharge pipe

To add an indicator to your filter, use the corresponding indicator data sheet to find the indicator details and add them to the filter assembly model code.

1.2. Filter element: (ordering example)

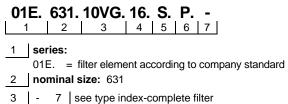

Technical data:

operating temperature: -10°C to +100°C

operating medium mineral oil, other media on request

max. operating pressure: 10 bar opening pressure by-pass valve: 2,0 bar

process connection: SAE-flange connection 3000 PSI

housing material standard: filter head and cover AL, / filter bowl glass fiber reinforced polyamide housing material IS10, category 2 and 3: filter head and cover AL, / filter bowl carbon fiber reinforced polyamide filter head and cover GG, / filter bowl carbon fiber reinforced polyamide

sealing material: Nitrile (NBR) or Viton (FPM), other materials on request

installation position: vertical volume tank: vertical 2x 3,9 l

Classified under the Pressure Equipment Directive 2014/68/EU for mineral oil (fluid group 2), Article 4, Para. 3. Classified under ATEX Directive 2014/34/EU according to specific application (see questionnaire sheet-no. 34279-4).

Pressure drop flow curves:

Filter calculation/sizing

The pressure drop of the assembly at a given flow rate Q is the sum of the housing Δp and the element Δp and is calculated as follows:

 Δp assembly = Δp housing + Δp element

 Δp housing = (see $\Delta p = f(Q)$ - characteristics)

$$\Delta p_{element} \; (mbar) = Q \; \left(\frac{l}{min}\right) x \; \frac{MSK}{10} \left(\frac{mbar}{l/min}\right) \; x \; v \left(\frac{mm^2}{s}\right) \; x \; \frac{\rho}{0.876} \left(\frac{kg}{dm^3}\right)$$

For ease of calculation our Filter Selection tool is available online at www.eaton.com/hydraulic-filter-evaluation


Material gradient coefficients (MSK) for filter elements

The material gradient coefficients in mbar/(l/min) apply to mineral oil (HLP) with a density of 0,876 kg/dm³ and a kinematic viscosity of 30 mm²/s (139 SUS). The pressure drop changes proportionally to the change in kinematic viscosity and density.

DTEF	VG					G			Р
	3VG	6VG	10VG	16VG	25VG	25G	40G	80G	10P
625	0,533	0,370	0,237	0,206	0,141	0,0193	0,0180	0,0123	0,116

$\Delta p = f(Q)$ – characteristics according to ISO 3968

The pressure drop characteristics apply to mineral oil (HLP) with a density of 0,876 kg/dm³. The pressure drop changes proportionally to the density.

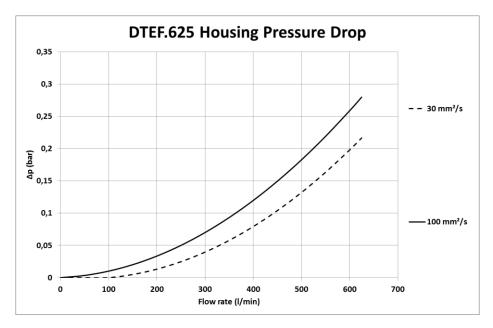

Symbols:

without indicator

with by-pass valve

visual O


electric contact maker E1 electric contact breaker E5 electric ontact maker/breaker E2














Spare parts:

item	qty.	designation	dimension	article-no.			
1	2	filter element	01E.631				
2	2	filter head					
3	2	filter cover					
4	2	filter bowl without discharge pipe					
	2	filter bowl with discharge pipe					
5	2	O-ring	140 x 3	304604 (NBR)	307514 (FPM)		
6	2	O-ring	120 x 4	305300 (NBR)	307991 (FPM)		
7	2	O-ring	63 x 3,5	311189 (NBR)	311592 (FPM)		
8	2	O-ring	135 x 3,5	318386 (NBR)	318387 (FPM)		
9	1	O-ring	56,75 x 3,53	306035 (NBR)	310264 (FPM)		
10	1	O-ring	75 x 3	302215 (NBR)	304729 (FPM)		
11	2	O-ring	18 x 3	304359 (NBR)	304399 (FPM)		
12	2	screw plug	G 1/4	305003			
13	1	pressure switch, electrical	E1, E2 or E5	see sheet-no. 1616			
14	1	clogging indicator, visual	0	see sheet-	see sheet-no. 1616		

Test methods: Filter elements are tested according to the following ISO standards:

ISO 2941 Verification of collapse/burst resistance ISO 2942 Verification of fabrication integrity

ISO 2943 Verification of material compatibility with fluids

ISO 3723 Method for end load test

ISO 3724 Verification of flow fatigue characteristics

ISO 3968 Evaluation of pressure drop versus flow characteristics ISO 16889 Multi-pass method for evaluating filtration performance

North America

44 Apple Street Tinton Falls, NJ 07724 Toll Free: 800 656-3344 (North America only) Tel: +1 732 212-4700

Europe/Africa/Middle East Auf der Heide 2

741 der Heide 2 53947 Nettersheim, Germany Tel: +49 2486 809-0

Friedensstraße 41 68804 Altlußheim, Germany Tel: +49 6205 2094-0

An den Nahewiesen 24 55450 Langenlonsheim, Germany Tel: +49 6704 204-0

Greater China

No. 7, Lane 280, Linhong Road Changning District, 200335 Shanghai, P.R. China Tel: +86 21 5200-0099

Asia-Pacific

100G Pasir Panjang Road #07-08 Interlocal Centre Singapore 118523 Tel: +65 6825-1668 For more information, please email us at *filtration* @eaton.com or visit www.eaton.com/filtration

© 2021 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

