

FZD Terminal Block Installation

Installation & Maintenance Information

IF 1610

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

WARNING

To avoid the risk of fire, explosion, or electric shock, this product should be installed, inspected, and maintained by a qualified electrician only, in accordance with all applicable electrical codes.

WARNING

To avoid electric shock:

Ensure electrical power is OFF before and during installation and maintenance.

Power to floodlight must be supplied by a wiring system with an equipment grounding conductor.

To avoid burning hands:


Make sure lamp tube and lamp are cool while performing maintenance.

MAINTENANCE

Perform visual, electrical, and mechanical inspections on a regular basis and replace worn or damaged parts as necessary. This should be determined by the environment and frequency of use. However, it is recommended that checks be made at least once a year. We recommend an Electrical Preventive Maintenance Program as described in the National Fire Association Bulletin NFPA No. 70B.

INSTALLATION

1. Disconnect power to the fixture.
2. Let lamp tube and lamp cool before performing terminal block installation.
3. Unthread cover (1) of wire compartment and set aside.
4. Remove wire nuts from black, white, and ground wires.
5. Wire fixture black wire to the line (L1) terminal, white wire to the neutral (N) terminal, and ground wire to the ground (PE) terminal on one side of the terminal block.
6. Wire black (incoming), white (neutral), and ground wires to the appropriate terminal on the other side of the terminal block.

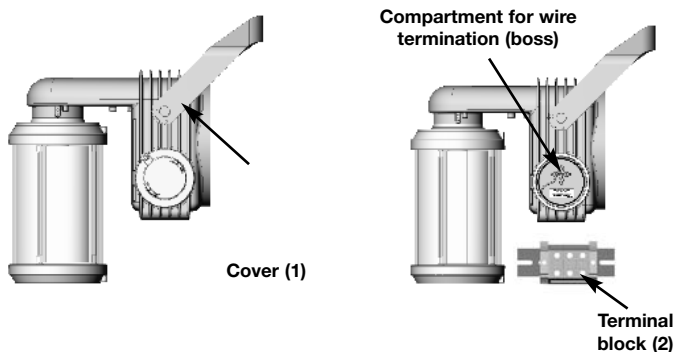

7. Install terminal block (2) using one of the holes (of the three (3) available) and the #8-32 screw provided.
8. Thread cover back to the housing.
9. You are ready to energize your fixture.

All statements, technical information and recommendations contained herein are based on information and tests we believe to be reliable. The accuracy or completeness thereof are not guaranteed. In accordance with Cooper Crouse-Hinds "Terms and Conditions of Sale," and since conditions of use are outside our control, the purchaser should determine the suitability of the product for his intended use and assumes all risk and liability whatsoever in connection therewith.