


Coordination chart for Kearney type 200 fuse links

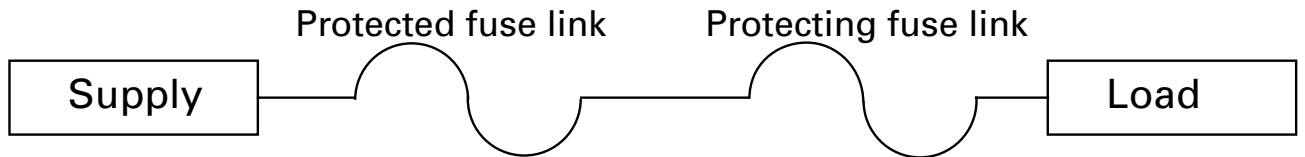

Effective October 2017

Protecting fuse link ampere rating	Protected fuse link ampere rating														
	7	10	15	20	25	30	40	50	65	80	100	125	150	175	200
	Maximum R.M.S. amperes for safe coordination														
1, 2, or 3	230	350	600	850	1250	1500	1900	2750	3500	4400	5300	6800	8100	10,000	10,000
5	190	310	560	820	1250	1500	1900	2750	3500	4400	5300	6800	8100	10,000	10,000
7			430	750	1150	1500	1900	2750	3500	4400	5300	6800	8100	10,000	10,000
10				650	1000	1400	1800	2750	3500	4400	5300	6800	8100	10,000	10,000
15					810	1250	1700	2600	3500	4400	5300	6800	8100	10,000	10,000
20						1000	1550	2500	3300	4400	5300	6800	8100	10,000	10,000
25							1200	2250	3100	4200	5300	6800	8100	10,000	10,000
30								2000	2950	4000	5000	6500	8100	10,000	10,000
40									2800	3700	4800	6500	8100	10,000	10,000
50										2800	4300	5800	7500	9500	10,000
65											3300	5000	6900	9000	10,000
80												3800	6000	8200	10,000
100													4700	7200	9500
125														5300	8000
150															6000

Note: This chart applies to Kearney Type 200 fuse links used in Kearney open and enclosed cutouts. It is recommended for general use under usual conditions of service, subject to the general rule that the ratio of fuse link sizes should be used large as circumstances permit.

Intentionally left blank

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

Eaton's Power Systems Division
2300 Badger Drive
Waukesha, WI 53188
United States
Eaton.com/cooperpowerseries

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. TD325005EN
October 2017

Eaton is a registered trademark.

All trademarks are property
of their respective owners.

For Eaton's Cooper Power series product
information
call 1-877-277-4636 or visit:
www.eaton.com/cooperpowerseries.