


# Coordination chart for Kearney type K fuse links

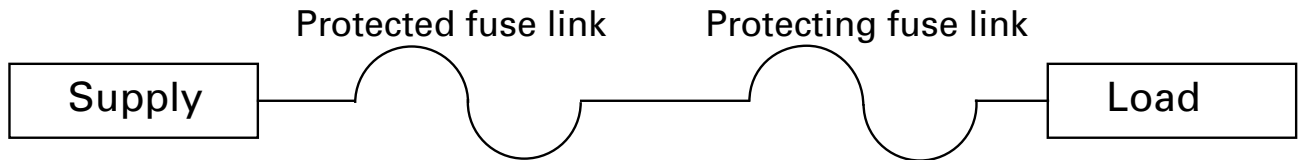

Effective October 2017

Protecting fuse link ampere rating	Protected fuse link ampere rating														
	6	8	10	12	15	20	25	30	40	50	65	80	100	140	200
Maximum R.M.S. amperes for safe coordination															
1, 2, or 3	80	160	260	375	520	700	950	1250	1600	2050	2600	3300	4500	7000	10,000
6			190	320	475	680	910	1250	1600	2050	2600	3300	4500	7000	10,000
8				260	430	640	880	1250	1600	2050	2600	3300	4500	7000	10,000
10					330	580	800	1200	1600	2050	2600	3300	4500	7000	10,000
12						460	730	1100	1500	2050	2600	3300	4500	7000	10,000
15							560	975	1350	1900	2500	3300	4500	7000	10,000
20								800	1200	1750	2350	3200	4400	7000	10,000
25									1000	1600	2200	3000	4300	7000	10,000
30										1300	2000	2800	4200	7000	10,000
40											1700	2600	3800	6600	10,000
50												2200	3600	6400	10,000
65													3100	6000	10,000
80														5500	10,000
100														4700	10,000
140															7000
200															

**Notes:** This chart applies to Kearney Type K fuse links used in Kearney open and enclosed cutouts. It is recommended for general use under usual conditions of service, subject to the general rule that the ratio of fuse link sizes should be used large as circumstances permit.

Intentionally left blank

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com

**Eaton's Power Systems Division**  
2300 Badger Drive  
Waukesha, WI 53188  
United States  
Eaton.com/cooperpowerseries

© 2017 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. TD325013EN  
October 2017

Eaton is a registered trademark.

All trademarks are property  
of their respective owners.

For Eaton's Cooper Power series product  
information  
call 1-877-277-4636 or visit:  
[www.eaton.com/cooperpowerseries](http://www.eaton.com/cooperpowerseries).